METRIC


MIL-C-55681/8A
28 July 1989
SUPERSEDING
DOD-C-55681/8
25 August 1983

MILITARY SPECIFICATION SHEET

CAPACITORS, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED, CERAMIC DIELECTRIC, ESTABLISHED RELIABILITY, STYLE CDR32, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55681.

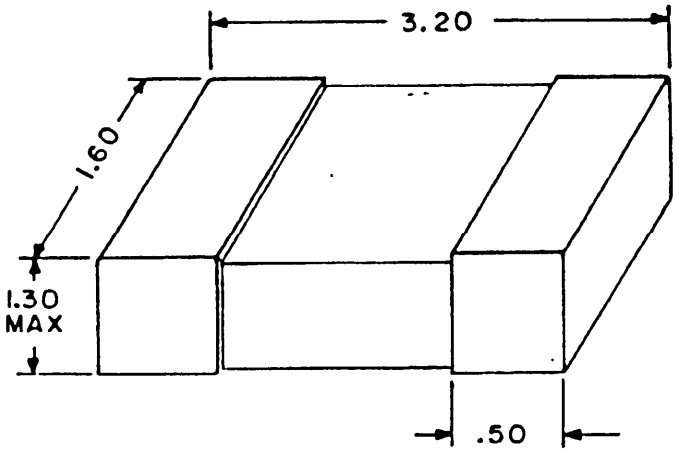

mm	Inches
.25	.010
.30	.012
.50	.020
.60	.023
1.30	.051
1.60	.062
3.20	.125

NOTES:
1. Dimensions are in millimeters.
2. Unless otherwise specified, tolerance is ±.20.
3. Dimensions and tolerances are for bare chips. For solder coated terminations add .60 to the positive length tolerance and .30 to the positive width and thickness tolerance.
4. Inch equivalents are given for general information only.

Ⓐ FIGURE 1. Style CDR32 capacitors.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

TABLE I. Style CDR32 capacitor characteristics.

Type designation 1/	Capacitance	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage
	(pF)			volts, dc
CDR32BP1R0B---	1.0	B, C	BP	100
CDR32BP1R1B---	1.1	"	"	"
CDR32BP1R2B---	1.2	"	"	"
CDR32BP1R3B---	1.3	"	"	"
CDR32BP1R5B---	1.5	"	"	"
CDR32BP1R6B---	1.6	"	"	"
CDR32BP1R8B---	1.8	"	"	"
CDR32BP2R0B---	2.0	"	"	"
CDR32BP2R2B---	2.2	"	"	"
CDR32BP2R4B---	2.4	"	"	"
CDR32BP2R7B---	2.7	B, C, D	"	"
CDR32BP3R0B---	3.0	"	"	"
CDR32BP3R3B---	3.3	"	"	"
CDR32BP3R6B---	3.6	"	"	"
CDR32BP3R9B---	3.9	"	"	"
CDR32BP4R3B---	4.3	"	"	"
CDR32BP4R7B---	4.7	"	"	"
CDR32BP5R1B---	5.1	"	"	"
CDR32BP5R6B---	5.6	"	"	"
CDR32BP6R2B---	6.2	"	"	"
CDR32BP6R8B---	6.8	"	"	"
CDR32BP7R5B---	7.5	"	"	"
CDR32BP8R2B---	8.2	"	"	"
CDR32BP9R1B---	9.1	"	"	"
CDR32BP100B---	10	F, J, K	"	"
CDR32BP110B---	11	"	"	"
CDR32BP120B---	12	"	"	"
CDR32BP130B---	13	"	"	"
CDR32BP150B---	15	"	"	"
CDR32BP160B---	16	"	"	"
CDR32BP180B---	18	"	"	"
CDR32BP200B---	20	"	"	"
CDR32BP220B---	22	"	"	"
CDR32BP240B---	24	"	"	"
CDR32BP270B---	27	"	"	"
CDR32BP300B---	30	"	"	"
CDR32BP330B---	33	"	"	"
CDR32BP360B---	36	"	"	"
CDR32BP390B---	39	"	"	"
CDR32BP430B---	43	"	"	"
CDR32BP470B---	47	"	"	"
CDR32BP510B---	51	"	"	"
CDR32BP560B---	56	"	"	"
CDR32BP620B---	62	"	"	"
CDR32BP680B---	68	"	"	"
CDR32BP750B---	75	"	"	"
CDR32BP820B---	82	"	"	"
CDR32BP910B---	91	"	"	"

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the current version before use.

TABLE I. Style CDR32 capacitor characteristics - Continued.

Type designation 1/	Capacitance	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage
	(pF)			volts, dc
CDR32BP101B---	100	F, J, K	BP	100
CDR32BP111B---	110	"	"	"
CDR32BP121B---	120	"	"	"
CDR32BP131B---	130	"	"	"
CDR32BP151B---	150	"	"	"
CDR32BP161B---	160	"	"	"
CDR32BP181B---	180	"	"	"
CDR32BP201B---	200	"	"	"
CDR32BP221B---	220	"	"	"
CDR32BP241B---	240	"	"	"
CDR32BP271B---	270	"	"	"
CDR32BP301B---	300	"	"	"
CDR32BP331B---	330	"	"	"
CDR32BP361B---	360	"	"	"
CDR32BP391B---	390	"	"	"
CDR32BP431B---	430	"	"	"
CDR32BP471B---	470	"	"	"
CDR32BP511B---	510	"	"	"
CDR32BP561B---	560	"	"	"
CDR32BP621B---	620	"	"	"
CDR32BP681B---	680	"	"	"
CDR32BP751B---	750	"	"	"
CDR32BP821B---	820	"	"	"
CDR32BP911B---	910	"	"	"
CDR32BP102B---	1,000	"	"	"
CDR32BP112A---	1,100	"	"	50
CDR32BP122A---	1,200	"	"	"
CDR32BP132A---	1,300	"	"	"
CDR32BP152A---	1,500	"	"	"
CDR32BP162A---	1,600	"	"	"
CDR32BP182A---	1,800	"	"	"
CDR32BP202A---	2,000	"	"	"
CDR32BP222A---	2,200	"	"	"
CDR32BX472B---	4,700	K, M	BX	100
CDR32BX562B---	5,600	"	"	"
CDR32BX682B---	6,800	"	"	"
CDR32BX822B---	8,200	"	"	"
CDR32BX103B---	10,000	"	"	"
CDR32BX123B---	12,000	"	"	"
CDR32BX153B---	15,000	"	"	"
CDR32BX183A---	18,000	"	"	50
CDR32BX223A---	22,000	"	"	"
CDR32BX273A---	27,000	"	"	"
CDR32BX333A---	33,000	"	"	"
CDR32BX393A---	39,000	"	"	"

1/ The complete Part or Identifying Number will include additional symbols to indicate capacitance tolerance, termination and failure rate level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Body structure: Multilayer, unencapsulated monolithic ceramic.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature range: -55°C to +125°C.

Marking: In accordance with MIL-C-55681.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - AS, OS
Air Force - 17, 99
DLA - ES

User activities:
Navy - MC, SH
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1651-2)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the current version before use.