
FED SUP CLASS
5935

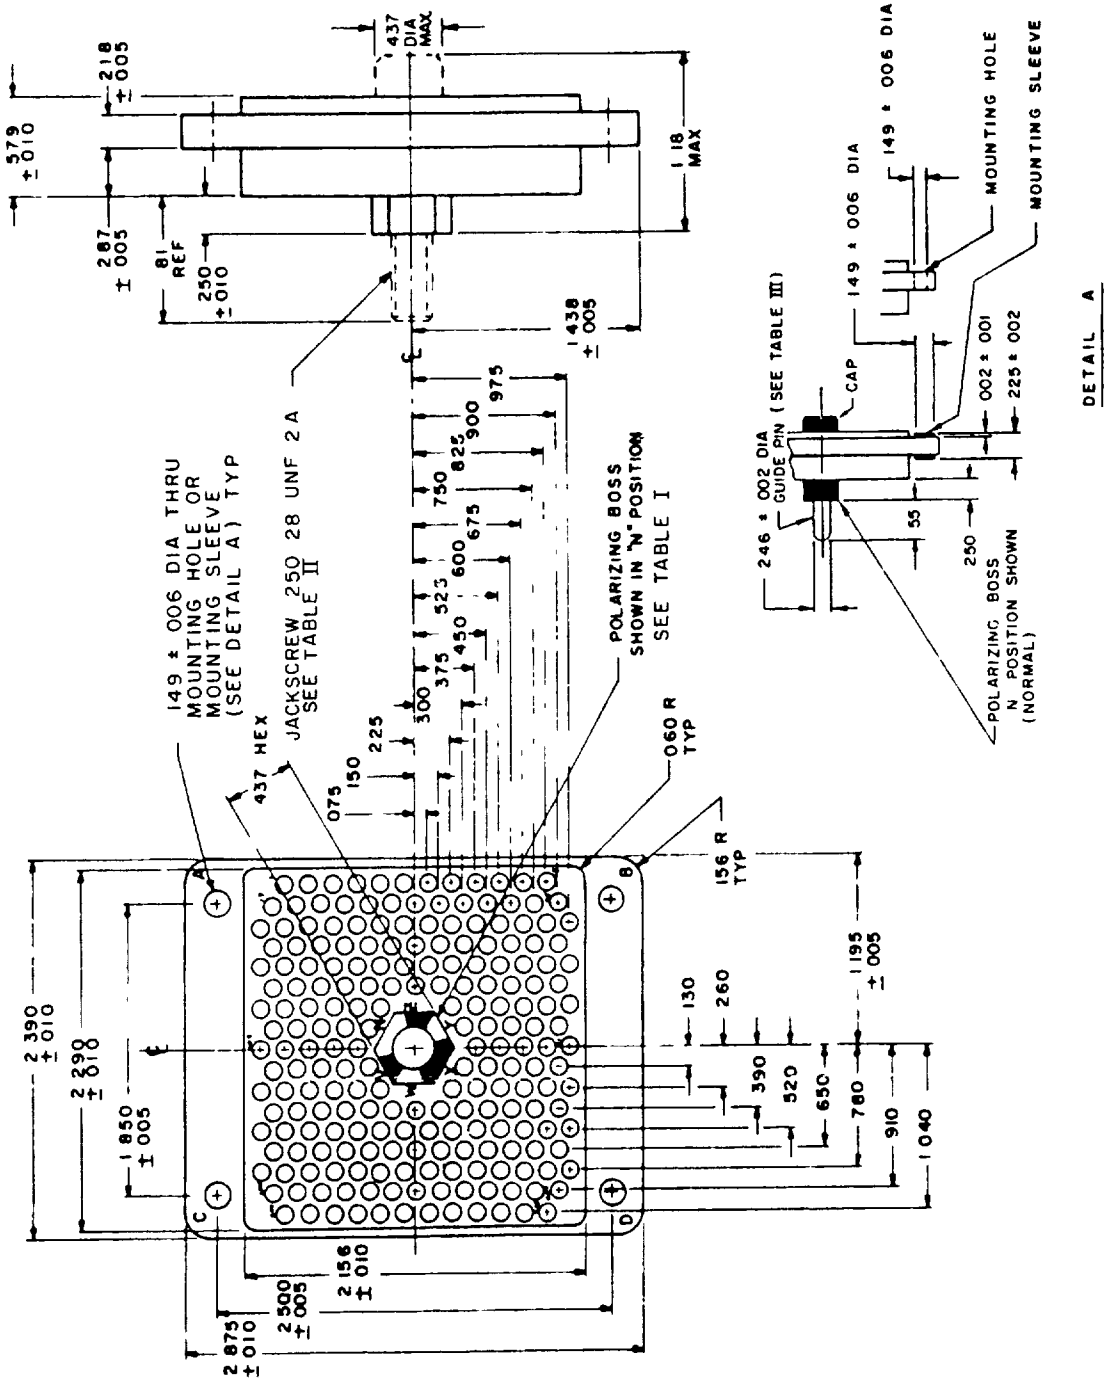

Design standard for use with MIL-C-28748 9

(B) Entire standard revised

P - Navy - EC Other C AF - 85 Army - EL	Interface Spec	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL 212 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS	MILITARY STANDARD MS 18167
P Spec Number MIL-C-28748		SUPERSEDES	SHEET 1 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-17

APPROVED 20 Dec 1965 REVISED (A) 20 May 1970 (B) 8 July 1976

User activities: Army ME, AV, WC; Navy MC; Air Force

Reviewer activities: Army MI MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use [illegible] equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

TYPE
SEE TABLE I




TABLE I		
TYPE	A	B
1	90°	135°
2	85°	137° 30'

TABLE II		
MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18167-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18167-1V	V (TYPE 1)	
MS 18167-1W	W (TYPE 1)	
MS 18167-1X	X (TYPE 2)	
MS 18167-1Y	Y (TYPE 2)	
MS 18167-1Z	Z (TYPE 2)	
MS 18167-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY 250-28 UNF-2B
MS 18167-2V	V (TYPE 1)	
MS 18167-2W	W (TYPE 1)	
MS 18167-2X	X (TYPE 2)	
MS 18167-2Y	Y (TYPE 2)	
MS 18167-2Z	Z (TYPE 2)	

TABLE III		
MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18167-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18167-3V	V (TYPE 1)	
MS 18167-3W	W (TYPE 1)	
MS 18167-3X	X (TYPE 2)	
MS 18167-3Y	Y (TYPE 2)	
MS 18167-3Z	Z (TYPE 2)	
MS 18167-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ± .002 I.D. TO ACCEPT GUIDE PIN
MS 18167-4V	V (TYPE 1)	
MS 18167-4W	W (TYPE 1)	
MS 18167-4X	X (TYPE 2)	
MS 18167-4Y	Y (TYPE 2)	
MS 18167-4Z	Z (TYPE 2)	

* LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

User activities: Army ME, AV, WC; Navy MC; Air Force
Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA-ES
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use will be controlled from the document

P A Navy - EC	International area	TITLE INSERT (INSULATOR) RECTANGULAR CONNECTOR POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 212 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS	MILITARY STANDARD
Other Cus AF - 85 Army - EL			MS 18167
Preparing activity MIL-C-28748		SUPERSEDES	SHEET 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
001	03	525	13 34
002	05	550	13 97
005	13	579	14 71
006	15	600	15 24
010	25	650	16 51
060	1 52	675	17 15
075	1 91	750	19 05
130	3 30	780	19 81
149	3 78	810	20 57
150	3 81	825	20 96
156	3 96	900	22 86
218	5 54	910	23 11
225	5 72	975	24 77
246	6 25	1 040	26 42
250	6 35	1 180	29 97
260	6 60	1 195	30 35
287	7 29	1 438	36 53
300	7 62	1 850	46 99
375	9 53	2 156	54 76
390	9 91	2 290	58 17
437	11 10	2 390	60 71
450	11 43	2 500	63 50
520	13 21	2 875	73 03

NOTES
1. Dimensions are in inches
2. Unless otherwise specified tolerance is ± 015 (38 mm)
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance between any two adjacent contact centers shall be ± 004 (.10 mm) Tolerance between any two contact centers, other than adjacent contacts shall be ±.006 (.15 mm)
5. Contact hole details shall be in accordance with MIL-C-28748
6. For mating connector see MS18168 (socket body)
7. Dimensions symmetrical about centerlines.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein
9. Reference documents shall be of the issue in effect on date of invitation for bid
10. Insert material shall be in accordance with MIL-C-28748
11. Flatness, squareness and parallelism shall be within dimensional tolerances
12. Center polarizing hardware may be rotated by removing retaining ring and spacer or removing cap (left hand thread) at rear of insert
13. Maximum insertion and withdrawal force (connector assembly) shall be 198 pounds
14. Maximum torque required at jackscrew to properly engage or disengage connector shall be 13 inch pounds
15. Jackscrew wrench size 5 /32 hex

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

Reviewer activities: Army MI, MU, AT; Navy, AS, SH, OS; Air Force 11, 80; DSA - ES

User activities: Army MI, AV, WC; Navy MC; Air Force

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use

D - Navy - EC - C AT - 85 Army - EL	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 212 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS	MILITARY STANDARD MS 18167
D ... ... Special Edition MIL-C-28748		SUPERSEDES	SHEET 3 OF 3

DD FORM 1 SEP 63 672 (Coordinated) OLD EDITIONS OF THIS FORM ARE OBSOLETE 5935-2004-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.