
REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-[illegible]

THIS SPECIFICATION APPROVED FOR USE BY Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

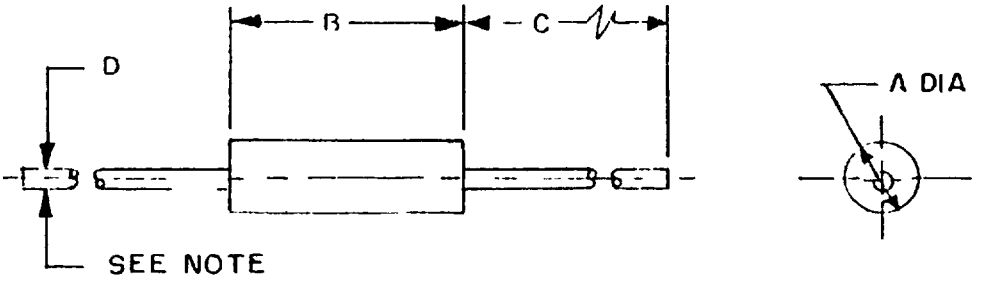


NOTE Tinned copper-wire lead terminal, AWG #24.

| LTR | Dimensions in inches with metric equivalents (mm) in parentheses | |
|---|---|---|
| | Dimensions | Tolerance |
| A | .136 (3.45) | Max |
| B | .335 (8.51) | ±.010 (0.25) |
| C | 1.438 (36.53) | ±.188 (4.78) |
| D | .020 (0.51) | ±.002 (0.05) |

| Ratings | |
|---|---|
| Style | LT10 |
| Grade | 1 |
| Class | A |
| Temperature rise | 15°C |
| Ambient temperature | 90°C |
| Operating temperature range | -55°C to +105°C |
| Dielectric withstanding voltage (sea level) | 700 volts rms for a minimum of 60 seconds |
| Dielectric withstanding voltage (reduced barometric pressure) | 100 volts rms for a minimum of 60 seconds |
| Terminal pull | 5 pounds |
| Altitude | 70,000 feet |
| Percent coupling | 3 percent, maximum |
| Weight | .50 gram, maximum |

© denotes changes

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY ER NAVY EC AIR FORCE DLA
REVIEW Army-AR,MI, Air Force-17,99
USER Air Force - 19
PROJECT NUMBER 5950-0751

MILITARY SPECIFICATION SHEET
TITLE COILS, RADIO FREQUENCY, MOLDED, FIXED, MICRO-MINIATURE, MAGNETICALLY SHIELDED, (FERRITE CORE-FERRITE SLEEVE) TYPES, LT10K 483 to LT10K 517 INCL

SPECIFICATION SHEET NUMBER
MS21401C 1 Nov 1990
SUPERSEDING
MS21401B 3 August 1979
AMSC N/A FSC 5950

DISTRIBUTION STATEMENT
A: Approved for public release; distribution is unlimited.





Source: https://assist.dla.mil - Downloaded: 2025-10-23T15:41:38Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION
THIS SPECIFICATION IS APPROVED FOR USE BY Departments and Agencies of the Department of Defense.

Form Approved
OMB No 0704-0188

Electrical characteristics (initial)

| Dash no. 1/ | Type designation | Inductance ±10% | Q min © | Test frequency | Self-resonant frequency min | DC resistance at 25°C, max | Max rated dc current | Incremental current |
|---|---|---|---|---|---|---|---|---|
| | | µh | | MHz | MHz | ohms | ma | ma |
| - 1 | LT10K483 | 15 | 35 | 2.5 | 48 | .635 | 314 | 200 |
| - 2 | LT10K484 | 18 | 35 | 2.5 | 44 | .728 | 293 | 175 |
| - 3 | LT10K485 | 22 | 35 | 2.5 | 37 | .825 | 275 | 160 |
| - 4 | LT10K486 | 27 | 35 | 2.5 | 32 | .950 | 256 | 155 |
| - 5 | LT10K487 | 33 | 36 | 2.5 | 30 | 1.26 | 223 | 150 |
| 6 | LT10K488 | 39 | 36 | 2.5 | 27 | 1.42 | 210 | 145 |
| - 7 | LT10K489 | 47 | 36 | 2.5 | 23 | 1.72 | 191 | 140 |
| - 8 | LT10K490 | 56 | 38 | 2.5 | 21 | 2.03 | 175 | 130 |
| - 9 | LT10K491 | 68 | 38 | 2.5 | 18.5 | 2.29 | 165 | 120 |
| -10 | LT10K492 | 82 | 36 | 2.5 | 17.0 | 2.55 | 157 | 115 |
| -11 | LT10K493 | 100 | 36 | 2.5 | 15.5 | 2.92 | 146 | 100 |
| -12 | LT10K494 | 120 | 43 | 0.79 | 14.5 | 3.30 | 154 | 80 |
| -13 | LT10K495 | 150 | 43 | 0.79 | 13.0 | 4.30 | 147 | 68 |
| -14 | LT10K496 | 180 | 43 | 0.79 | 11.5 | 5.40 | 120 | 64 |
| -15 | LT10K497 | 220 | 45 | 0.79 | 10.0 | 6.65 | 108 | 60 |
| -16 | LT10K498 | 270 | 47 | 0.79 | 9.50 | 7.60 | 101 | 58 |
| -17 | LT10K499 | 330 | 47 | 0.79 | 8.50 | 8.50 | 96 | 56 |
| -18 | LT10K500 | 390 | 47 | 0.79 | 8.00 | 10.0 | 88 | 54 |
| -19 | LT10K501 | 470 | 47 | 0.79 | 7.20 | 13.5 | 76 | 52 |
| -20 | LT10K502 | 560 | 51 | 0.79 | 6.40 | 14.5 | 73 | 50 |
| -21 | LT10K503 | 680 | 51 | 0.79 | 5.80 | 16.0 | 70 | 48 |
| -22 | LT10K504 | 820 | 48 | 0.79 | 5.30 | 19.0 | 64 | 47 |
| -23 | LT10K505 | 1,000 | 48 | 0.79 | 4.80 | 21.5 | 60 | 45 |
| -24 | LT10K506 | 1,200 | 45 | 0.25 | 2.90 | 23 | 52 | 40 |
| -25 | LT10K507 | 1,500 | 45 | 0.25 | 2.80 | 30 | 46 | 35 |
| -26 | LT10K508 | 1,800 | 45 | 0.25 | 2.60 | 33 | 44 | 32 |
| -27 | LT10K509 | 2,200 | 45 | 0.25 | 2.55 | 40 | 40 | 30 |
| -28 | LT10K510 | 2,700 | 45 | 0.25 | 2.40 | 43 | 38 | 28 |
| -29 | LT10K511 | 3,300 | 45 | 0.25 | 2.00 | 58 | 33 | 26 |
| -30 | LT10K512 | 3,900 | 45 | 0.25 | 1.95 | 76 | 29 | 23 |
| -31 | LT10K513 | 4,700 | 45 | 0.25 | 1.85 | 85 | 27 | 20 |
| -32 | LT10K514 | 5,600 | 45 | 0.25 | 1.75 | 100 | 25 | 18 |
| -33 | LT10K515 | 6,800 | 40 | 0.25 | 1.58 | 127 | 22 | 15 |
| -34 | LT10K516 | 8,200 | 40 | 0.25 | 1.55 | 150 | 20 | 12 |
| -35 | LT10K517 | 10,000 | 40 | 0.25 | 1.45 | 190 | 18 | 10 |

1/ The dash number added to the MS military standard number constitutes the MS part number, for example MS21401-1.

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY ER NAVY EC AIR FORCE DLA
REVIEW Army-AR,MI, Air Force-17,99
USER Air Force - 19
PROJECT NUMBER 5950-0751
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

MILITARY SPECIFICATION SHEET
TITLE COILS, RADIO FREQUENCY, MOLDED, FIXED, MICRO-MINIATURE, MAGNETICALLY SHIELDED, (FERRITE CORE-FERRITE SLEEVE) TYPES, LT10K 483 to LT10K 517 INCL.

SPECIFICATION SHEET NUMBER
MS21401C
SUPERSEDING
MS21401B 3 August 1979
AMSC N/A FSC 5950



Source: https://assist.dla.mil -- Downloaded: 2026-03-23T14:38Z
Check the source to verify that this is the current version before use.

DD Form 672, MAY 88 Previous editions are obsolete

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-[illegible]

THIS SPECIFICATION IS APPROVED FOR USE BY Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

| Electrical characteristics (final) | | | | |
|---|---|---|---|---|
| Inspection group | Allowable variation from initial measurement | | Allowable % from specified minimum value in electrical characteristics (initial) table | |
| | Inductance | DC resistance | Self-resonant frequency | Q |
| | Percent | | | |
| Qualification inspection | | | | |
| Group II | ±5 | --- | --- | -10 |
| Group III | ±10 | ±(5% +.001 ohm) | -15 | -20 |
| Group IV | ±5 | ±(2% +.001 ohm) | -5 | -20 |
| Quality conformance inspection | | | | |
| Group C | | | | |
| Subgroup I | ±5 | --- | --- | -10 |
| Subgroup II | ±5 | ±(2% +.001 ohm) | -5 | -20 |
| Subgroup III | ±10 | ±(4% +.001 ohm) | -15 | -20 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Barometric pressure test (test condition C) is applicable.
4. Shock, specified pulse, method 213, test condition I, is applicable.
5. These coils are intended to be supported by their leads.
6. After the overload test is performed, a period of 24 hours shall elapse prior to taking electrical characteristics (final) measurements.
7. DC resistance shall be the last measurement taken in the electrical characteristics test sequence.
8. Referenced document shall be the issue in effect on date of invitation for bid.
9. This standard takes precedence over the procurement specification referenced herein.

| | | |
|---|---|---|
| PREPARING ACTIVITY Air Force - 85<br>CUSTODIANS ARMY ER NAVY EC AIR FORCE DLA<br>REVIEW Army-AR,MI, Air Force-17,99 USER Air Force - 19<br>PROJECT NUMBER 5950-0751 | MILITARY SPECIFICATION SHEET<br>TITLE COILS, RADIO FREQUENCY, MOLDED, FIXED, MICRO-MINIATURE, MAGNETICALLY SHIELDED, (FERRITE CORE-FERRITE SLEEVE) TYPES, LT10K 483 to LT10K 517 INCL | SPECIFICATION SHEET NUMBER<br>MS21401C<br>SUPERSEDING<br>MS21401B 3 August 1979<br>AMSC N/A FSC 5950 |
| DISTRIBUTION STATEMENT<br>A: Approved for public release; distribution is unlimited | | Page 3 of 3 |

Source: https://assist.dla.mil - Downloaded: 2026-0-23T14:38?
Check the source to verify that this is the current version before use.

DD Form 672, MAY 88 Previous editions are obsolete