
Form Approved
OMB No. 0704-0188

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-S-8834.

THIS SPECIFICATION IS APPROVED FOR USE BY All Departments and Agencies of the Department of Defense.

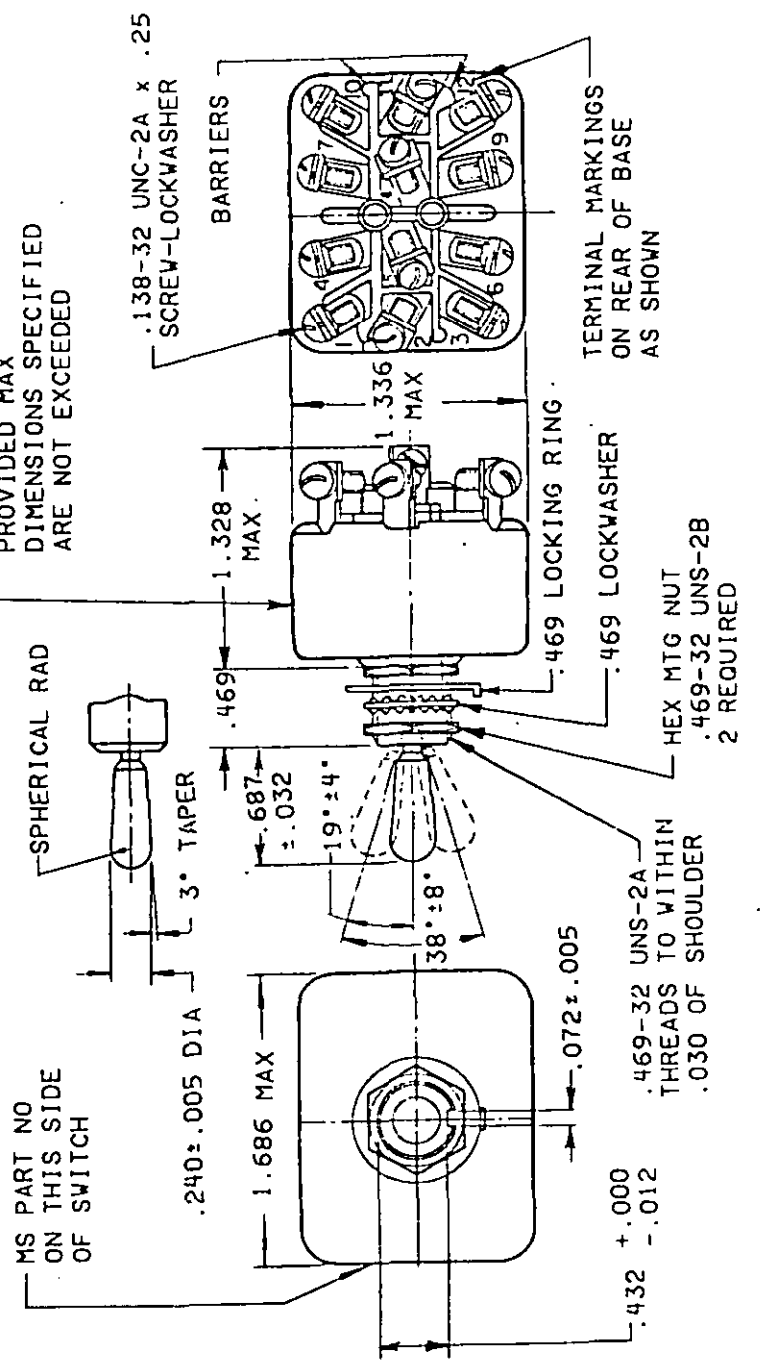

(K) Denotes change

PREPARING ACTIVITY: Air Force - 85 CUSTODIANS: ARMY - ER NAVY - AS AIR FORCE - DLA - Army-AR, MI Navy-EC REVIEW: Air Force- 17, 99 (K) USER: PROJECT NUMBER: 5930-1454-09	MILITARY SPECIFICATION SHEET TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES	SPECIFICATION SHEET NUMBER MS25308K 4 Sep 1991 SUPERSEDING MS25308J 30 Sep 1986 AMSC - N/A FSC - 5930

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Page 1 of 4

DD Form 672, MAY 88 Previous editions are obsolete.

* U.S. GOVERNMENT PRINTING OFFICE: 1989-240-879:40029

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-S-8834.

Form Approved
OMB No. 0704-0188

(K) DETAIL REQUIREMENTS:

MS DASH NO.: ENVIRONMENTAL SEALED	CIRCUIT MADE BETWEEN TERMINALS AS INDICATED WITH THE TOGGLE LEVER IN THESE POSITIONS: 1/			CURRENT CAPACITY AMPERES PER POLE 28 VOLTS DC			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 400 HERTZ			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 60 HERTZ			LIFE LOW CURRENT LEVEL SWITCHING	SUPERSEDED DASH NUMBER
	OPPOSITE KEYWAY SIDE	CENTER POSITION	KEYWAY SIDE	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	30 -V	TOGGLE SEALED
-212		OFF	ON 1-2,4-5 7-8,10-11											-211
-222		NONE	OFF											-221
-232	ON 2-3,5-6 8-9,11-12		ON 1-2,4-5 7-8,10-11											-231
-242		OFF	NONE											-241
-262		NONE												-251
-272	MOM-ON 2-3,5-6 8-9,11-12	OFF	MOM-ON 1-2,4-5 7-8,10-11	7	25	15	7	25	15	7	20	15	10 mA	-271
-282		NONE												-281
-292	ON 2-3,5-6 8-9,11-12	NONE	MOM-OFF											-291
-302	OFF		MOM-ON 1-2,4-5											-301
-312	ON 2-3,5-6 8-9,11-12	OFF	7-8,10-11											-311

1/ Non-functional terminals shall not be supplied.

PREPARING ACTIVITY: Air Force - 85 CUSTODIANS: ARMY - ER NAVY - AS AIR FORCE - DLA - REVIEW: Army-AR, MI Navy-EC Air Force - 17, 99 (K) USER: PROJECT NUMBER: 5930-1454-09	MILITARY SPECIFICATION SHEET TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES	SPECIFICATION SHEET NUMBER MS25308K SUPERSEDING MS25308J 30 Sep 1986 AMSC - N/A FSC - 5930
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited		Page 2 of 4

DD Form 672, MAY 88 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-S-8834.

Form Approved
OMB No. 0704-0188

(K)

DETAIL REQUIREMENTS:

MS DASH NO. ENVIRONMENTAL SEALED	CURRENT CAPACITY AMPERES PER POLE 250 VOLTS 60 HERTZ AC			CURRENT CAPACITY AMPERES PER POLE 125 VOLTS DC			CURRENT CAPACITY AMPERES PER POLE 250 VOLTS DC			LIFE LOW CURRENT LEVEL SWITCHING 30 mV	SUPERSEDED DASH NUMBER
	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT		TOGGLE SEALED
-212											-211
-222											-221
-232											-231
-242											-241
-262											-261
-272		10	7		750 mA	-		500 mA	-	10 mA	-271
-282											-281
-292											-291
-302											-301
-312											-311

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY - ER NAVY - AS
AIR FORCE - DLA -
Army-AR, MI Navy-EC
REVIEW: Air Force - 17, 99 (K)
USER:
PROJECT NUMBER: 5930-1454-09

MILITARY SPECIFICATION SHEET
TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES

SPECIFICATION SHEET NUMBER
MS25308K
SUPERSEDING MS25308J 30 Sep 1986
AMSC - N/A FSC - 5930

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 Previous editions are obsolete.

* U.S. GOVERNMENT PRINTING OFFICE: 1988-240-979/60528

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-S-8834.

THIS SPECIFICATION IS APPROVED FOR USE BY All Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

INCHES	mm	INCHES	mm
.005	0.13	.25	6.35
.012	0.30	.432	10.67
.030	0.76	.469	11.91
.032	0/81	.687	17.45
.072	1.83	1.328	33.73
.138	3.51	1.336	33.93
.240	6.10	1.686	42.82

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±.5° on angles.
4. For hardware and terminal screw detail specifications see appendix of MIL-S-8834.
5. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. The MS dash numbers supersede and are completely interchangeable with the superseded dash numbers.
8. Example of part numbers:
   (K) MS25308-212 = ON-OFF-ON, environmentally sealed switch.
   MS25308-272 = MOM-ON, OFF, MOM-ON environmentally sealed switch.
9. (K) Maximum weight: .2027 pound (91.9 grams).
10. Altitude requirements: 80,000 feet.
11. 115 V ac, 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

PREPARING ACTIVITY: Air Force - 85 CUSTODIANS: ARMY - ER NAVY - AS AIR FORCE - DLA - REVIEW: Army-AR, MI Navy-EC Air Force- 17, 99 (K) USER: PROJECT NUMBER: 5930-1454-09	MILITARY SPECIFICATION SHEET TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES	SPECIFICATION SHEET NUMBER MS25308K SUPERSEDING MS25308J 30 Sep 1986 AMSC - N/A FSC - 5930
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.		Page 4 of 4

DD Form 672, MAY 88 Previous editions are obsolete. * U.S. GOVERNMENT PRINTING OFFICE: 1988-240-979/80928

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.