INCH-POUND
MS27471G
w/AMENDMENT 1
27 Aug 2024
SUPERSEDING
MS27471G
13 April 2012

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, SOLDER MOUNTING, SOLDER TYPE, HERMETIC SEAL, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

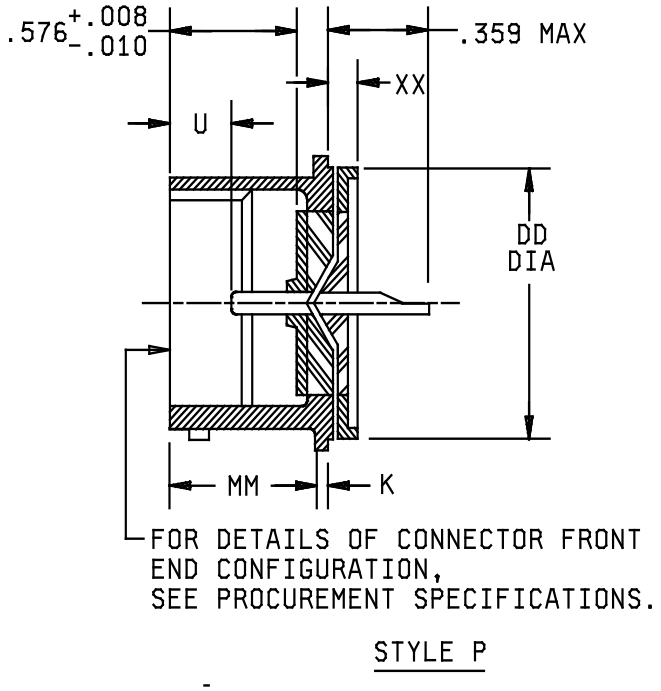
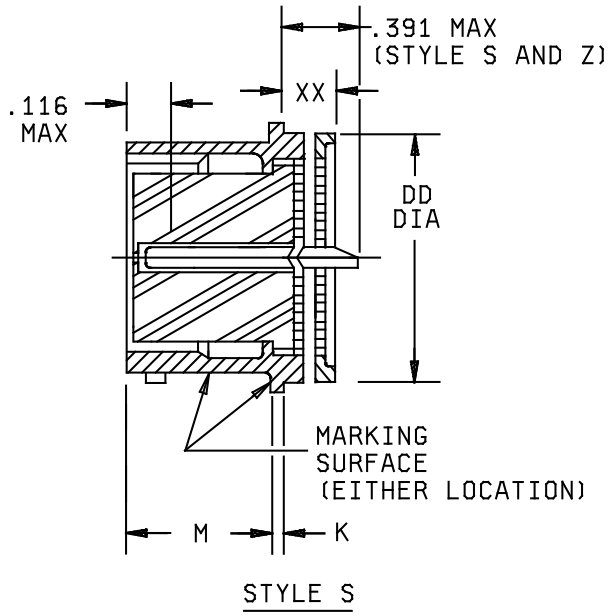


FIGURE 1. Receptacle, class Y.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.



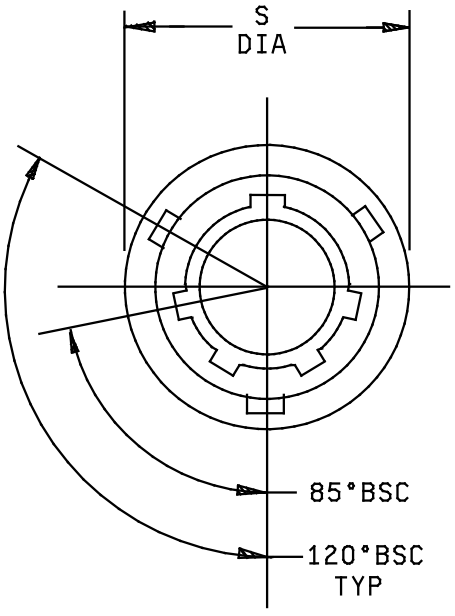


FIGURE 1. Receptacle, class Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

Shell size	K +.016 -.005	M +.031 -.000	MM +.031 -.000	DD dia +.001 -.005	S dia ±.016 O.D.	U +.005 -.011	XX max
9	.031	.747	.659	.672	.750	.390	.187
11				.781	.844		
13				.906	.969		
15				1.031	1.094		
17				1.156	1.218		
19				1.250	1.312		
21				1.375	1.438		
23				1.500	1.563		.218
25				1.625	1.688		

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.116	2.95	.672	17.07	1.156	29.36
.004	0.10	.126	3.18	.747	18.97	1.218	30.94
.005	0.13	.187	4.75	.750	19.05	1.250	31.75
.008	0.20	.218	5.54	.781	19.84	1.312	33.32
.010	0.25	.359	9.12	.844	21.44	1.375	34.93
.011	0.29	.390	9.91	.906	23.01	1.438	36.53
.016	0.41	.391	9.93	.969	24.61	1.500	38.10
.031	0.79	.576	14.63	1.031	26.19	1.563	39.70
.063	1.60	.659	16.74	1.094	27.79	1.625	41.28
						1.688	42.88

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. For main keyway and keyway positions, see MIL-DTL-38999.
4. Diameters DD and S shall be concentric with .015 inches (0.381 mm) TIR.

FIGURE 1. Receptacle, class Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MS27467, MS27661 and MS27653.
Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:



Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-1560
MS27467
MS27653
MS27661

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project: 5935-2024-158)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.