







FED SUP CLASS
5930

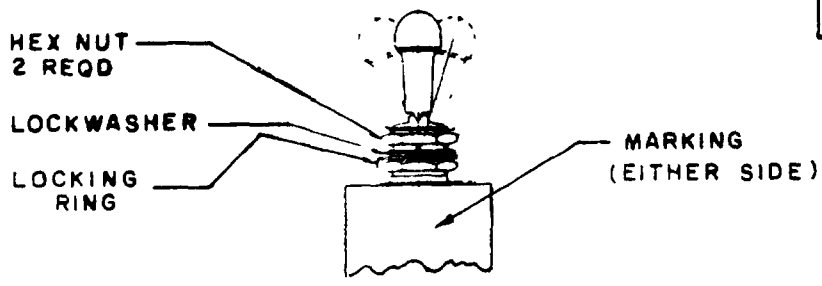

LOCKING COMBINATIONS
(KEYING SIDE)

A  LOCKED IN THREE POSITIONS	B  LOCKED IN CENTER AND (KEYING SIDE)	D  LOCKED OUT OF CENTER POSITION	E  LOCKED IN CENTER POSITION
F  LOCKED IN POSITION (OPPOSITE KEYING)	G  LOCKED IN (KEYING SIDE)	H  LOCKED OUT OF CENTER AND (KEYING SIDE)	J  LOCKED OUT OF CENTER AND (OPPOSITE KEYING)
K  LOCKED IN CENTER AND (OPPOSITE KEYING)	L  LOCKED OUT OF (KEYING SIDE)	M  LOCKED OUT OF AND INTO POSITION (OPPOSITE KEYING)	N  LOCKED OUT OF POSITION (OPPOSITE KEYING)
P  LOCKED OUT OF AND INTO (KEYING SIDE)	FIGURES A THRU P DO NOT REPRESENT DETAILS OF CONSTR-UCTION. THEY SCHEM-ATICALLY ILLUSTRATE LOCKING CONFIGUR-ATIONS	THE CIRCUIT PORTION OF THE PART NUMBERING TABLE SHALL INDICATE MOMENTARY POSITIONS	

(B) ENTIRE STANDARD REVISED

APPROVED 22 APR 71 REVISED (A) 17 MAY 77 (B) 30 JAN 86

P - AF-85 Other Cus ARMY-ER NAVY-AS	International Series	TITLE SWITCHES, TOGGLE AND LEVER-LOCK, MILITARY STANDARD PART NUMBERING SYSTEM	MILITARY STANDARD MS 27740
Procurement Specification NONE		SUPERSEDES	PAGE 1 OF 3

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5930-1242

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil — Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5930

MS Part number	Available locking combinations	Circuit with toggle lever in: Keying side	Center	Opposite keying side	Current capacity (amperes): 28 volts dc Lamp-load circuit	28 volts dc Resistive circuit	28 volts dc Inductive circuit	115 volts, 60 and 400 Hz ac Lamp-load circuit	115 volts, 60 and 400 Hz ac Resistive circuit	115 volts, 60 and 400 Hz ac Inductive circuit
MSXXXXX-21		ON	OFF							
-22		OFF	NONE							
-23		ON								
-24		NONE	OFF	ON						
-25			MOM OFF	2-3 8-9						
See note 3 -26	F		NONE	5-6 11-12						
-27		MOM ON	OFF	MOM ON						
-28		1-2 7-8 4-5 10-11		NONE						

Example of Part Numbering table, for a complete listing of dash numbers, see page 3

NOTES.
1. Illustrations and table shown are typical for a lever lock toggle switch, for a standard toggle omit the illustrations and the "Available Locking Combinations" column
2. The military part number (MSXXXX or MXXXX) suffix shall be selected from the following Circuit table. All military part numbers with the same circuitry shall have the same suffix.
3. Example. MS24660-26F - is a four pole (small numbers in "keying" and "opposite keying side" columns denote closed circuits), MOM ON-NONE-ON" switch with an "F" locking combination (locked in position opposite keying).
4. When circuitry is not provided, the dash number shall be -X1, with any additional specials (on that MS or specification sheet) numbered consecutively (-X2, -X3, etc)
5. Changes made in revision (B) will only apply to future revisions of MS and specification sheets

APPROVED 22 APR 71 REVISED (A) 17 MAY 77 (B) 30 JANUARY 1986

Review activities: Army - AV, MI; Navy - EC; Air Force - 99; DLA - ES

User activities: Army - Navy - Air Force

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

PA AF-85 Other Cust ARMY-ER NAVY-AS	International interest	TITLE: SWITCHES, TOGGLE AND LEVER-LOCK, MILITARY STANDARD PART NUMBERING SYSTEM	MILITARY STANDARD MS 27740
Procurement Specification NONE		SUPERSEDES	PAGE 2 OF 3

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5930-1242

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5930

Circuit table

Circuit number	Circuit with toggle lever in		
	Keying side	Center	Opposite keying side
21	1-2 ON 7-8 4-5 10-11	OFF	2-3 ON 8-9 5-6 11-12
22	OFF	NONE	2-3 ON 8-9 5-6 11-12
23	1-2 ON 7-8 4-5 10-11	NONE	2-3 ON 8-9 5-6 11-12
24	NONE	OFF	2-3 ON 8-9 5-6 11-12
25	NONE	MOM OFF	2-3 ON 8-9 5-6 11-12
26	1-2 MOM ON 7-8 4-5 10-11	NONE	2-3 ON 8-9 5-6 11-12
27	1-2 MOM ON 7-8 4-5 10-11	OFF	2-3 MOM ON 8-9 5-6 11-12
28	1-2 MOM ON 7-8 4-5 10-11	OFF	NONE
29	MOM OFF	NONE	2-3 ON 8-9 5-6 11-12
30	1-2 MOM ON 7-8 4-5 10-11	NONE	OFF
31	1-2 MOM ON 7-8 4-5 10-11	OFF	2-3 ON 8-9 5-6 11-12
32	NONE	1-2 ON 7-8 4-5 10-11	2-3 MOM ON 8-9 5-6 11-12
33	NONE	1-2 ON 7-8 4-5 10-11	2-3 ON 8-9 5-6 11-12
34	1-2 ON 7-8 4-5 10-11	2-3 ON 7-8 4-5 11-12	2-3 ON 8-9 5-6 11-12
35	1-2 MOM ON 7-8 4-5 10-11	2-3 ON 7-8 4-5 11-12	2-3 ON 8-9 5-6 11-12
36	1-2 MOM ON 7-8 4-5 10-11	2-3 ON 7-8 4-5 11-12	2-3 MOM ON 8-9 5-6 11-12
37	1-2 MOM ON 7-8 4-5 10-11	2-3 ON 8-9 5-6 11-12	NONE
38	1-2 ON 7-8 4-5 10-11	1-2 ON 8-9 5-6 10-11	2-3 ON 8-9 5-6 11-12
39	1-2 MOM ON 7-8 4-5 10-11	1-2 ON 8-9 5-6 10-11	2-3 ON 8-9 5-6 11-12
40	1-2 MOM ON 7-8 4-5 10-11	1-2 ON 8-9 5-6 10-11	2-3 MOM ON 8-9 5-6 11-12

APPROVED 22 APR 71 REVISED (A) 17 MAY 77 (B) 30 JANUARY 1986

User activities: Army - Navy - Air Force -

Review activities: Army - AV, MI; Navy - EC; Air Force - 99; DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

PA AF-85

Other Cust ARMY-ER NAVY-AS

International interest

TITLE
SWITCHES, TOGGLE, AND LEVER-LOCK, MILITARY STANDARD PART NUMBERING SYSTEM

MILITARY STANDARD
MS 27740

Procurement Specification NONE

SUPERSEDES

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5930-1242

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.