
FED. SUP CLASS
4730

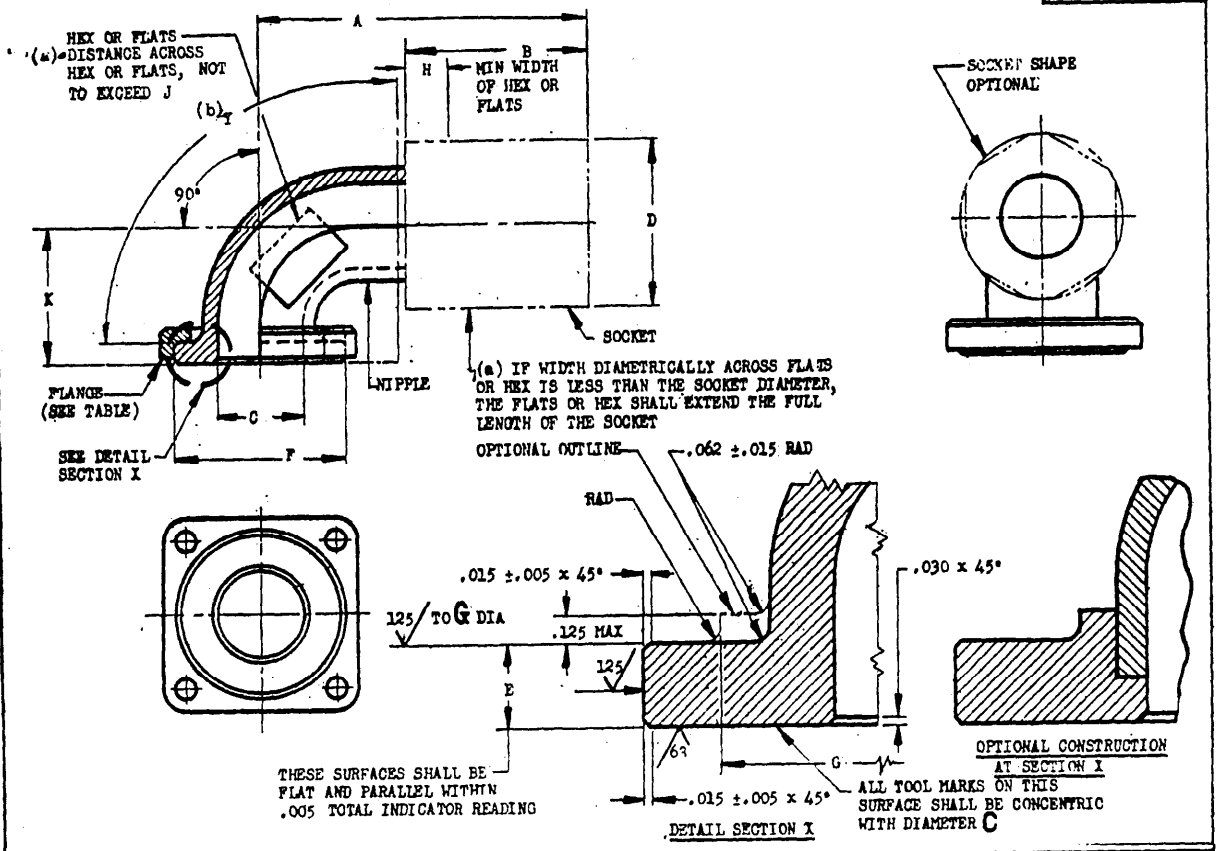

DASH NO.	FIIN	NOMINAL TUBING AND HOSE SIZE REF	FLANGE PART NO.	A MAX	B MAX	(c)C MIN DIA	D DIA	E +.000 -.005	(c) F +.000 -.005 DIA	G MAX DIA	H MIN	J REF	K		WEIGHT LB MAX
D8		1/2	MS20756-D8	2.820	1.781	.383	1.156	.156	.875	.625	.250	.813	.875	±.070	.38
D10		5/8	MS20756-D10	3.069	1.905	.469	1.375		1.000	.750	.312	.968	1.000		.47
D12		3/4	MS20756-D12	3.400	2.110	.578	1.500		1.250	.938	.375	1.093	1.094		.44
D12-16			MS20756-D16						1.500	1.188		1.343	1.219		.70
D16		1		3.140	1.671	.781	1.625								
D20		1-1/4	MS20756-D20	3.520	1.810	1.031	2.062	.188	1.844	1.500	.500	1.656	1.422	±.100	.83
D20-24			MS20756-D24						2.125	1.750		1.906	1.594		
D24		1-1/2		3.810	1.860	1.276	2.312						1.609		
D32		2	MS20756-D32	4.640	2.265	1.745	2.812		2.750	2.375	.625	2.531	1.953	±.120	1.27
D40		2-1/2	(d)MS20756-D40	5.330	2.515	2.209	3.390		3.281	2.875	1.000	3.031	2.375		2.17
D48		3	(d)MS20756-D48	5.700		2.834	4.188		3.781	3.375	1.250	3.250	2.625		

(D) (a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.
(b) THE TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN ANGLE Y, HOWEVER, A BALL .031 SMALLER IN DIAMETER THAN C MUST PASS THROUGH.
(c) DIAMETERS F, G AND C SHALL BE CONCENTRIC WITHIN .010 TOTAL INDICATOR READING.
(d) HEX FLANGE MS20756 NOT SHOWN.

MATERIAL: NIPPLE; ALUMINUM ALLOY, SPECIFICATIONS QQ-A-351 (CONDITION T4), QQ-A-367 (COMPOSITION 5), QQ-A-325 (CONDITION T6), QQ-A-261 (CONDITION T6), QQ-A-266 (CONDITION T6), WW-T-789 (CONDITION T6).
SOCKET; ALUMINUM ALLOY, SPECIFICATIONS QQ-A-351 (CONDITION T4), QQ-A-268 (CONDITION T4), QQ-A-367 (COMPOSITION 5), QQ-A-261 (CONDITION T6), QQ-A-266 (CONDITION T6), QQ-A-267 (CONDITION T4).
WHEN UTILIZING BRAZED CONSTRUCTION, MATERIALS CONFORMING TO SPECIFICATION QQ-A-325 (CONDITION T6) OR SPECIFICATION WW-T-789 (CONDITION T6) ONLY SHALL BE USED.
FINISH: ALUMINUM ALLOY; ANODIC FILM, SPECIFICATION MIL-A-8625 TYPE 2 DYE LIGHT BLUE, FOR FLANGE AND NIPPLE ONLY.
FOR SURFACE ROUGHNESS SEE STANDARD MIL-STD-10.
THE INTERIOR SURFACE OF THE FITTING SHALL BE SMOOTH AND FREE FROM PROJECTIONS.
REMOVE ALL BURRS AND SHARP EDGES.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1°.
FITTINGS MUST SWIVEL THROUGH 360° WITH SUFFICIENT CLEARANCE TO ALLOW USE OF STANDARD WRENCHES ON THE NUT WHEN THE AXIS OF THE HOSE IS ALINED OVER THE STUD OR CAP SCREW.
THE AIRPLANE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATION.
FITTINGS SHALL BE PERMANENTLY MARKED WITH THE MS PART NUMBER ON AN UNFINISHED SURFACE OF THE NIPPLE.
FOR INSTALLATION DETAILS, SEE MS33786.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

REVISED (D) 20 Aug 59 (C) 1 Apr 59 (B) 26 Aug 57 (A) 9 Jun 55 REVISED 22 May 53

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. ASG Other Cust Navy - Aer USAF	TITLE ELBOW, SWIVEL FLANGED, 90°, REUSABLE, HOSE	MILITARY STANDARD MS28750(ASG)
PROCUREMENT SPECIFICATION MIL-F-5070	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.