INCH-POUND

MS3110F
29 April 2009
SUPERSEDING
MS3110E
1 March 2007

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, SOLDER TYPE, WALL MOUNTING, BAYONET COUPLING, SERIES 1, CLASSES E, F, J AND P

Inactive for new design after 15 December 1998.
For new design, use MS3470.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

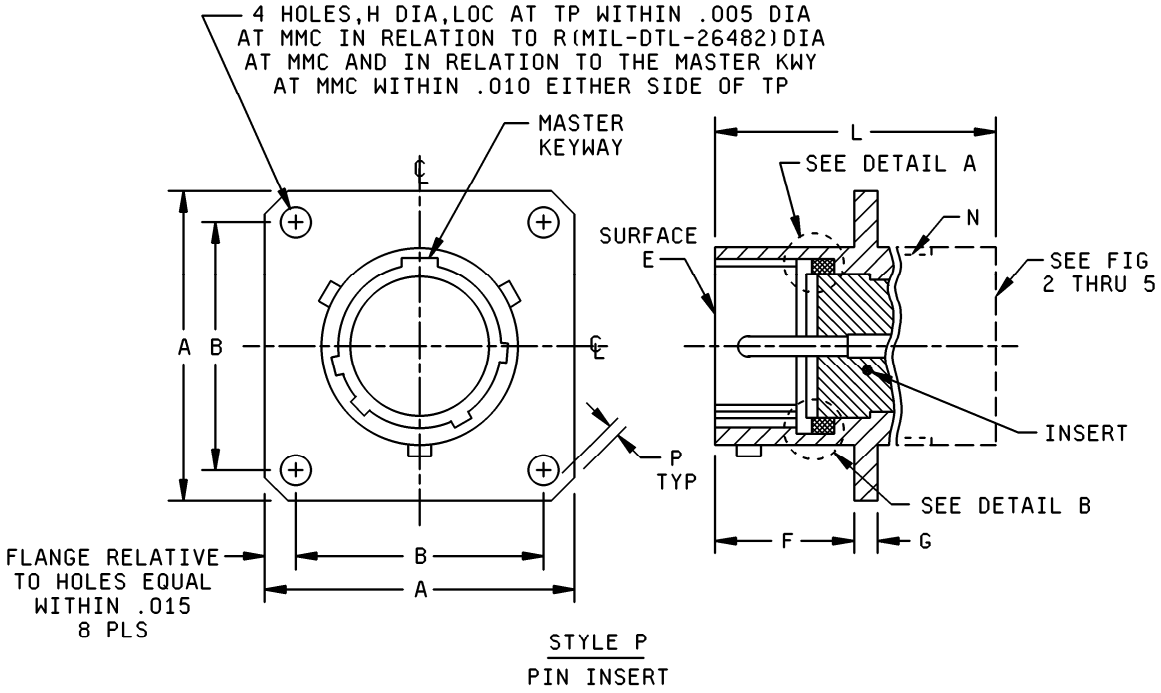
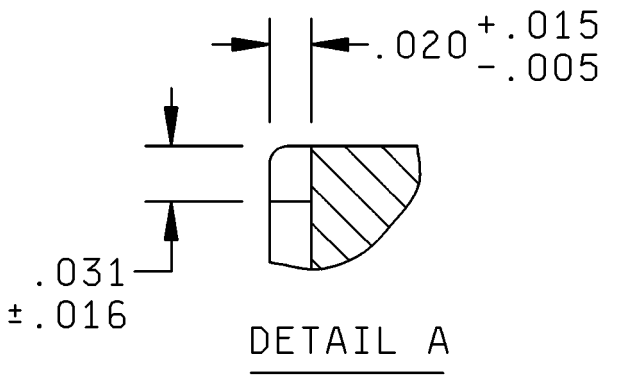


FIGURE 1. Receptacle, classes E, F, J, and P.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.



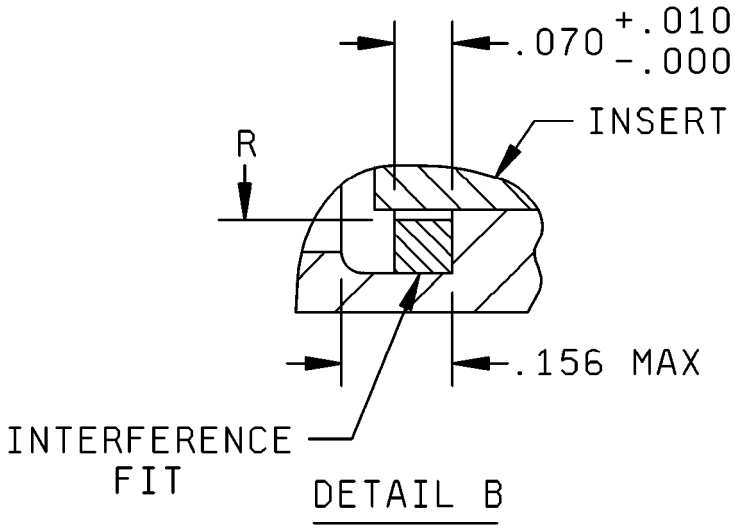
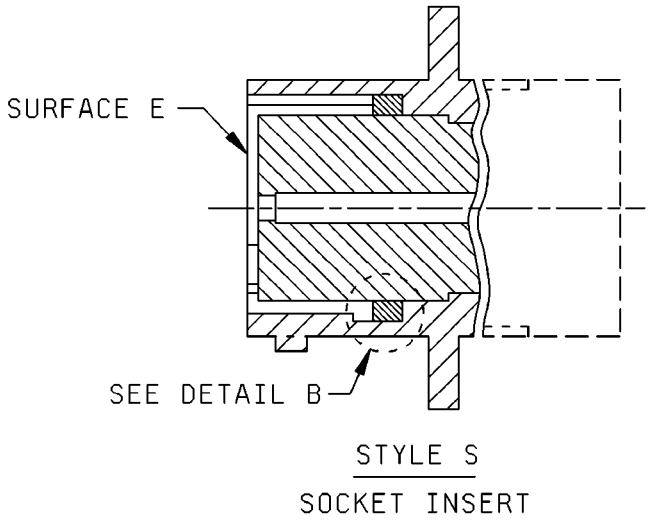


FIGURE 1. Receptacle, classes E, F, J and P - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.



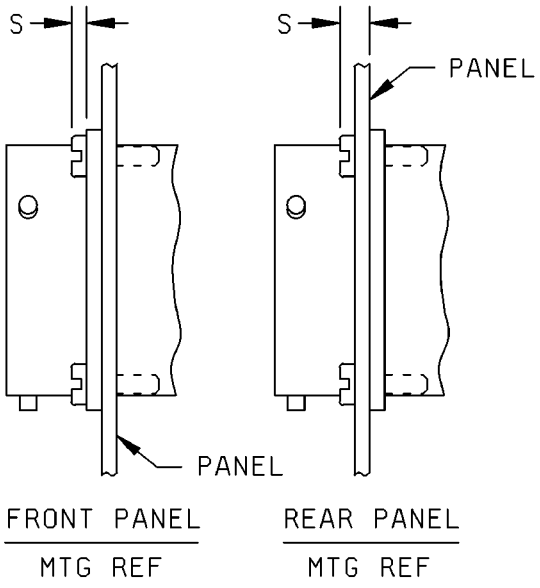


FIGURE 1. Receptacle, classes E, F, J and P - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

Shell size	A max length	B (TP) mounting holes	F + .031, - .000 mounting flange location	G ± .016 thick mounting flange	H ± .005 dia mounting holes
8	.828 (21.03)	.594 (15.08)	.431 (10.95)	.062 (1.57)	.120 (3.05)
10	.954 (24.23)	.719 (18.26)			
12	1.047 (26.60)	.812 (20.62)			
14	1.141 (28.98)	.906 (23.01)			
16	1.234 (31.34)	.969 (24.61)			
18	1.328 (33.73)	1.062 (26.97)			
20	1.453 (36.90)	1.158 (29.41)	.556 (14.12)	.094 (2.38)	
22	1.578 (40.08)	1.250 (31.75)			
24	1.700 (43.18)	1.375 (34.92)	.589 (14.96)		.147 (3.73)

FIGURE 1. Receptacle, classes E, F, J, and P - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


Shell size	N UNEF-2A accessory thread	P min edge distance	R max ID gasket	S max
8	.4375-28	.035 (0.89)	.329 (8.35)	.087 (2.21)
10	.5625-24		.457 (11.60)	
12	.6875-24		.564 (14.32)	
14	.8125-20		.689 (17.50)	
16	.9375-20		.814 (20.67)	
18	1.0625-18		.907 (23.04)	
20	1.1875-18	.147 (3.73)	1.039 (26.39)	.212 (5.38)
22	1.3125-18		1.164 (29.56)	
24	1.4375-18		1.289 (32.74)	

Inches	mm	Inches	mm
.005	0.13	.020	0.51
.010	0.25	.031	0.79
.015	0.38	.070	1.78
.016	0.41	.156	3.96

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. True position (TP) tolerances specified are in accordance with ASME Y14.5M.

FIGURE 1. Receptacle, classes E, F, J and P - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

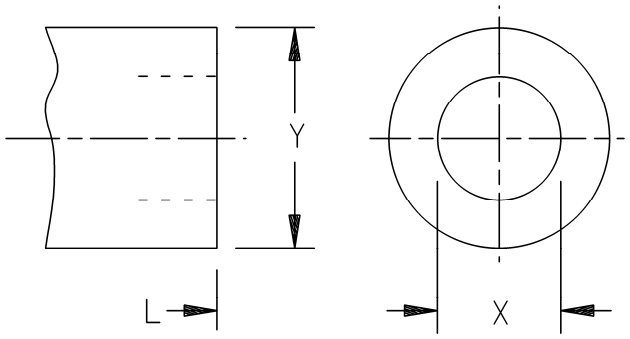


Shell size	L max overall length	X dia min ID	Y dia max OD
8	1.328 (33.73)	.259 (6.58)	.608 (15.44)
10		.359 (9.12)	.734 (18.64)
12		.469 (11.91)	.858 (21.79)
14		.589 (14.96)	.984 (24.99)
16		.727 (18.47)	1.110 (28.19)
18		.779 (19.79)	1.234 (31.34)
20	1.531 (38.89)	.901 (22.89)	1.360 (34.54)
22		1.009 (25.63)	1.484 (37.69)
24	1.594 (40.49)	1.123 (28.52)	1.610 (40.89)


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. True position (TP) tolerances specified are in accordance with ASME Y14.5M.

FIGURE 2. Receptacle, rear accessories configurations, class E.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

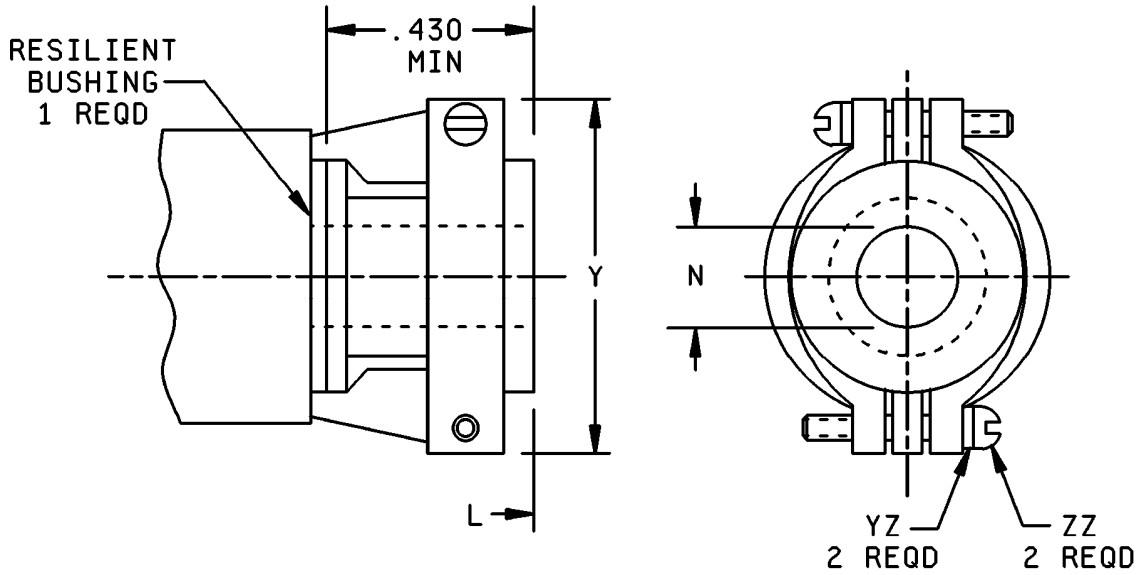

CLASS F, WITH BUSHING

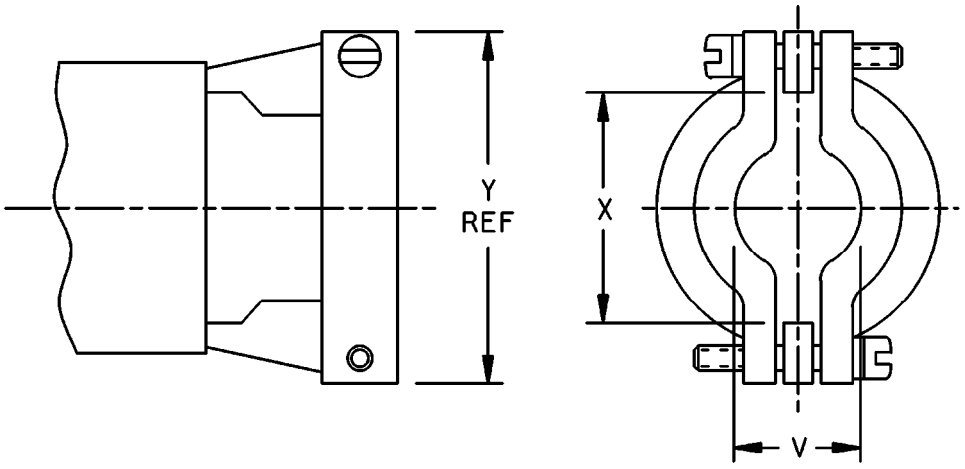

CLASS F, WITH BUSHING REMOVED

FIGURE 3. Receptacle, rear accessories configurations, class F.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

Shell size	L max overall length	Y max	X dia min open	V max closed	N (see note 4) ± .010 free dia	ZZ screw threads	YZ (see note 5) Lockwashers NASM35338 or NASM35333 types
8	1.922 (48.82)	.828 (21.03)	.234 (5.94)	.157 (3.99)	.125 (3.18)	6-32 UNC	NASM35338 - 98 or -41 NASM35333 -105 or -37
10		.891 (22.63)	.297 (7.54)	.187 (4.75)	.188 (4.78)		
12		1.016 (25.81)	.422 (10.72)	.281 (7.14)	.312 (7.92)		
14		1.161 (29.49)	.547 (13.89)	.325 (8.26)	.375 (9.53)		
16	2.047 (51.99)	1.203 (30.56)	.609 (15.47)	.356 (9.04)	.500 (12.70)		
18	2.078 (52.78)	1.469 (37.31)	.734 (18.64)	.456 (11.58)	.625 (15.88)	8-32 UNC	NASM35338 -B8L or -8L -99 or -42 NASM35333 -106 or -38
20	2.344 (59.54)			.519 (13.18)	.625 (15.88)		
22		1.656 (42.06)	.922 (23.42)	.519 (13.18)	.750 (19.05)		
24	2.406 (61.11)	1.750 (44.45)	.984 (24.99)	.657 (16.69)	.800 (20.32)		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in given for information only.
3. True position (TP) tolerances specified are in accordance with ASME Y14.5M.
4. Use MS3420 bushing if reduced opening is required.
5. For class F: Lockwashers may be captivated.

FIGURE 3. Receptacle, rear accessories configurations, class F - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

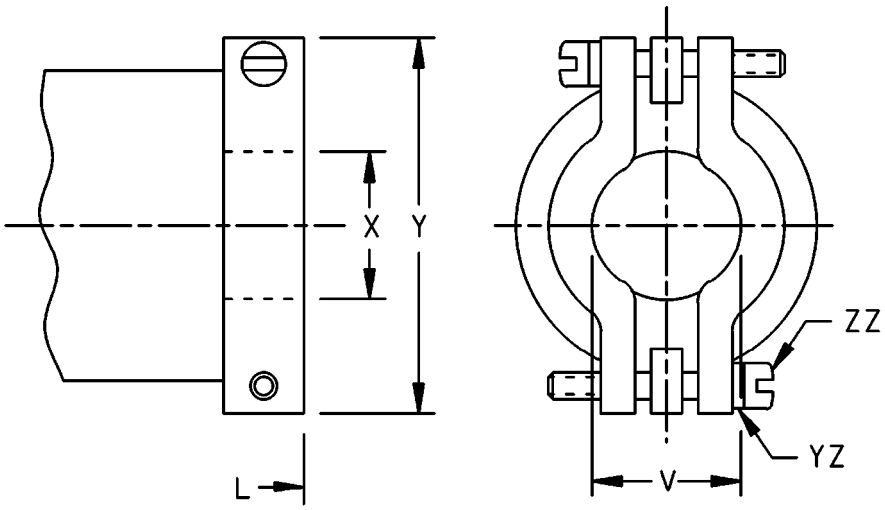


Shell size	L max overall length	V max closed	X ID gland seal min range		Y dia max	ZZ screw threads	YZ (see note 4) Lockwashers NASM35338 or NASM35333 types
			closed	open			
8	2.271 (57.68)	.157 (3.99)	.169 (4.29)	.230 (5.84)	.828 (21.03)	6-32 UNC	NASM35338 - 98 or -41 NASM35333 -105 or -37
10		.187 (4.75)	.205 (5.21)	.312 (7.92)	.891 (22.63)		
12	2.411 (61.24)	.281 (7.14)	.338 (8.59)	.442 (11.23)	1.016 (25.81)		
14	2.599 (66.01)	.325 (8.26)	.416 (10.57)	.539 (13.69)	1.161 (29.49)		
16	2.943 (74.75)	.356 (9.04)	.550 (13.97)	.616 (15.65)	1.203 (30.56)		
18	3.172 (80.57)	.456 (11.58)	.600 (15.24)	.672 (17.07)	1.469 (37.31)	8-32 UNC	NASM35338 -B8L or -8L -99 or -42 NASM35333 -106 or -38
20	3.610 (91.69)	.519 (13.18)	.635 (16.13)	.747 (18.97)			
22	3.766 (95.66)		.670 (17.02)	.846 (21.49)	1.656 (42.06)		
24	3.985 (101.22)	.657 (16.69)	.760 (19.30)	.854 (21.69)	1.750 (44.45)		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. True position (TP) tolerances specified are in accordance with ASME Y14.5M.
4. Lockwashers may be captivated.

FIGURE 4. Receptacle, rear accessories configurations, class J.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

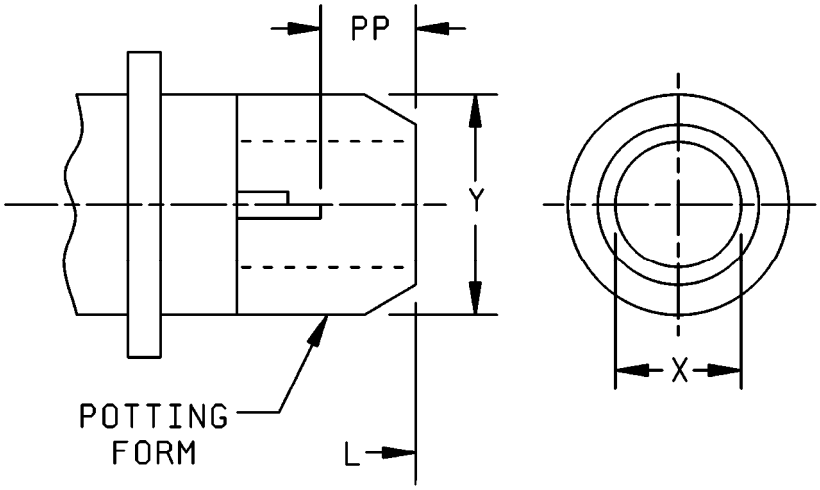

Shell size	L max overall length	X dia min	Y dia max	PP min
8	1.453 (36.91)	.317 (8.05)	.608 (15.44)	.250 (6.35)
10		.434 (11.02)	.734 (18.64)	
12		.548 (13.92)	.858 (21.79)	
14		.673 (17.09)	.984 (24.99)	
16		.798 (20.27)	1.110 (28.19)	
18		.899 (22.83)	1.234 (31.34)	
20	1.672 (42.47)	1.024 (26.01)	1.360 (34.54)	
22		1.149 (29.18)	1.484 (37.69)	
24	1.734 (44.04)	1.274 (32.36)	1.610 (40.89)	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. True position (TP) tolerances specified are in accordance with ASME Y14.5M.

FIGURE 5. Receptacle, rear accessories configurations, class P.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 through 5.


Connector mating: This connector mates with MS3111, MS3116, MS3121 and MS3126.

For insert arrangement: See MIL-STD-1669.

Intermateability dimensions are in accordance with MIL-DTL-26482.

Finishes: A finish designator shall not be included in the PIN when finish W is required. See MIL-DTL-26482 for other finishes, including D, T and Z, available for classes E, F, P and J.

Part or Identifying Number (PIN) example:

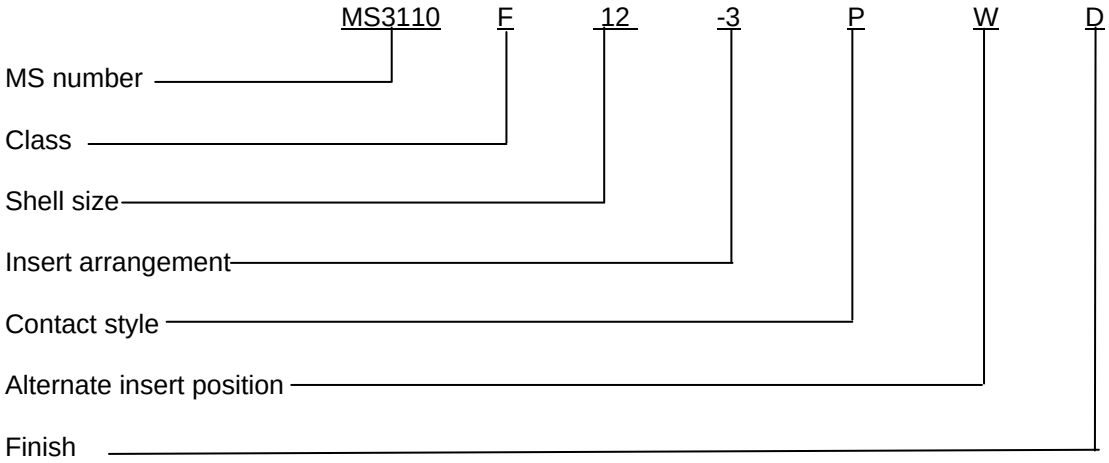

Note: When finish W is required, no finish designator is used (class W is the default finish).

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3111
MS3116
MS3121
MS3126
MS3420
MS3470
MIL-STD-1669
ASME Y14.5M
NASM35333
NASM35338

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AV
Navy - EC, SH
Air Force - 99

(Project 5935-2007-177)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.