military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Navy - AS, USAF - 11, Army - EL

User activities:

DD FORM 1426 672-1 (Coordinated)

PROCUREMENT SPECIFICATION MIL-C-26482

P.A. Navy - AS, Other Cust: USAF - 11, Army - EL

SUPERSEDES:

INACTIVE FOR NEW DESIGN AFTER 5 SEP 1975


TITLE: CONNECTORS, PLUG, ELECTRIC, CRIMP TYPE, CABLE-CONNECTING, BAYONET COUPLING

MILITARY STANDARD

MS 3121

SHEET 1 OF 2

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

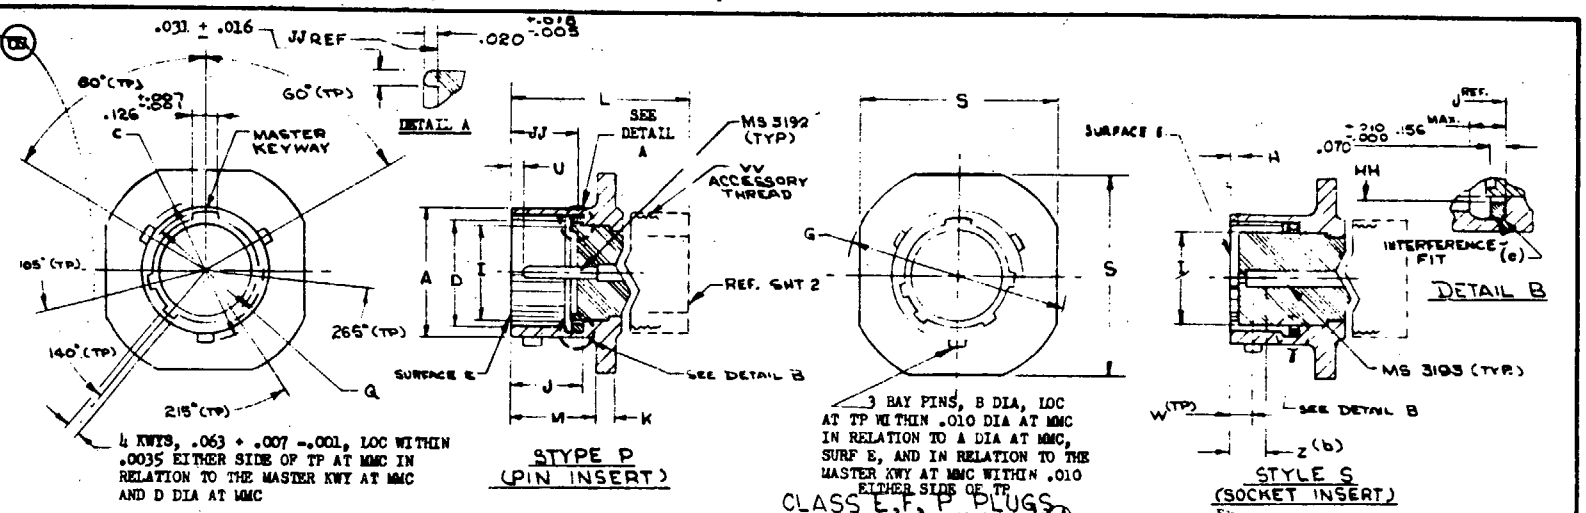

CLASS E, F, P PLUGS

SIZE	A DIA +.001 -.005 OD	B +.006 -.002 BAY PIN DIA	C DIA +.000 -.016 OVER BAY PIN	D DIA +.005 -.001 ID	G DIA ±.020 ACROSS FLANGE CORNERS	H +.000 -.020 SOCKET INSERT LOC	I MAX INSERT DIA	J ±.010 PACKING LOC	JJ +.000 -.020 PIN INSERT LOC	K ±.016 THK MTG FLANGE	M +.031 +.000 MTG FLANGE LOC	Q DIA +.005 -.006 OVER KWYS	S MAX LENGTH SIDE	HH MAX I.D. GASKET	U +.010 -.020 PIN CONTACT LOC	W (TP) BAY PIN LOC	Z (b) +.000 -.078 SOCKET CONTACT SPRING LOC	VV CLASS 2A ACCESSORY THREAD		INSERT ARR (REF)
8	.473	.078	.563	.362	.938	.025	.285	.382	.332	.094	.400	.412	.828	.329	.085	.100	.153	7/16-28		MS33708
10	.590		.680	.490	1.062		.402					.540	.954	.457				9/16-24		MS33709
12	.750		.859	.607	1.156		.516					.689	1.047	.564				11/16-24		MS33710
14	.875		.984	.732	1.250		.641					.814	1.141	.689				13/16-20		MS33711
16	1.000		1.108	.857	1.344		.766					.939	1.234	.814				15/16-20		MS33712
18	1.125		1.233	.962	1.438		.855					1.039	1.328	.907				1 1/16-18		MS33713
20	1.250		1.358	1.087	1.562		.980				.535	1.164	1.453	1.039	.147		.215	1 3/16-18		MS33714
22	1.375		1.483	1.212	1.688	.087	1.105	.444	.394	.115		1.289	1.578	1.164				1 5/16-18		MS33715
24	1.500	.125	1.610	1.337	1.812		1.229				.568	1.414	1.703	1.289		.109		1 7/16-18		MS33716

(a) DIMENSIONS IN INCHES
(b) DISTANCE BETWEEN END OF SHELL AND THE POINT AT WHICH A GAGE PIN HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE FIRST ENGAGES SOCKET CONTACT SPRING
(c) PACKING MATERIAL SHALL MEET THE REQUIREMENTS OF MIL-STD-417,
(d) TRUE POSITION (TP) TOLERANCES SPECIFIED ARE IN ACCORDANCE WITH MIL-STD-8
(e) MATERIAL: SHELL - ALUMINUM ALLOY; BAYONET PINS (B DIA) - STAINLESS STEEL, PASSIVATED
(f) EXAMPLE OF PART NUMBER:

MS3121 E 12-3PW

MS NUMBER | CLASS | SIZE | INSERT ARRANGEMENT | CONTACT STYLE | ALTERNATE INSERT POSITION

FOR CHANGES SEE SHEETS 1 AND 2

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

FED. SUP CLASS 5935

APPROVED 7 DEC 1965 REVISED (A) 25 FEB 6? (B) 5 SEP 1975

5935-1947-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
Navy - AS
USAF - 11
Army - ML

User activities:

DD FORM 672-1 (Coordinated)

PROCUREMENT SPECIFICATION: MIL-C-26482

P.A. Navy - AS
Other Cust
USAF - 11
Army - ML

SUPERSEDES:

TITLE: CONNECTORS, PLUG, ELECTRIC, CRIMP TYPE, CABLE-CONNECTING, BAYONET COUPLING

MILITARY STANDARD


MS3121

SHEET 2 OF 2

FED. SUP CLASS 5935


5935-1947-10

CLASS E

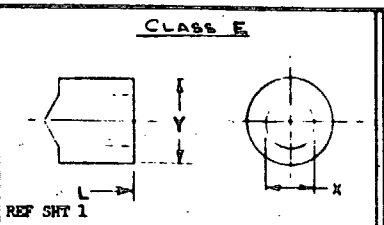

SIZE	L MAX OVER-ALL LENGTH	X MIN DIA ID	Y MAX DIA OD
8	1.522	.259	.608
10		.359	.734
12		.469	.858
14		.589	.984
16		.717	1.110
18		.779	1.234
20	1.709	.901	1.360
22		1.009	1.484
24		1.123	1.610


CLASS F

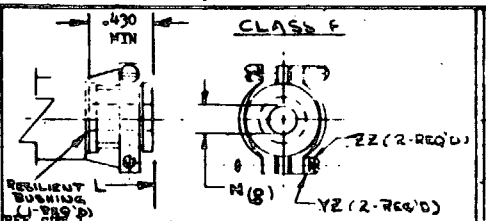

SIZE	L MAX OVER-ALL LENGTH	X DIA MIN OPEN	Y MAX	V MAX CLOSED
8	2.422	.234	.828	.187
10		.297	.891	.187
12		.422	1.016	.281
14		.547	1.141	.325
16	2.537	.609	1.203	.356
18		.734	1.469	.456
20	2.824	.734		.519
22		.922	1.656	
24	2.900	.984	1.750	.657

SIZE	N (g) ±.010 FREE DIA	ZZ SCREW THREADS	YZ (h) LOCKWASHERS AN935 OR AN936 TYPES
8	.125	6-32UNC	AN935B6L OR -6L AN936-A6B OR -A6
10	.188		
12	.312		
14	.375		
16	.500		
18	.625	8-32UNC	AN935B8L OR -8L AN936-A8B OR -A8
20	.625		
22	.750		
24	.800		


DIMENSIONS WITH BUSHING REMOVED



(g) USE MS3420 BUSHING IF REDUCED OPENING IS REQUIRED

(h) LOCKWASHERS MAY BE CAPTIVE

CLASS P

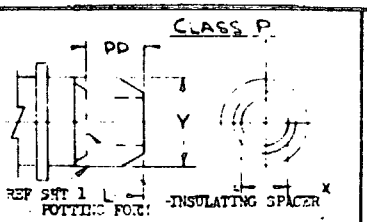

L MAX OVER-ALL LENGTH	X MIN DIA ID	Y MAX DIA OD	PP MIN
1.656	.317	.608	.250
	.434	.734	
	.548	.858	
	.673	.984	
	.798	1.110	
	.899	1.234	
1.750	1.024	1.360	
1.750	1.149	1.484	
1.782	1.274	1.610	

APPROVED 7 DEC 1965

REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.