

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS. 1500

F DIA, D HOLES, SHALL FIT A MATING PART HAVING A PILOT DIAMETER W AND D STUDS EACH WITHIN AN AREA HAVING X DIAMETER CENTRALLY LOCATED ON ITS BASIC POSITION

SURFACE SHALL BE FLAT AND SQUARE WITH AXIS OF ROTATION WITHIN .002 FIR PER INCH OF DIAMETER FLANGE AND SHAFT RELATIVELY ROTATING

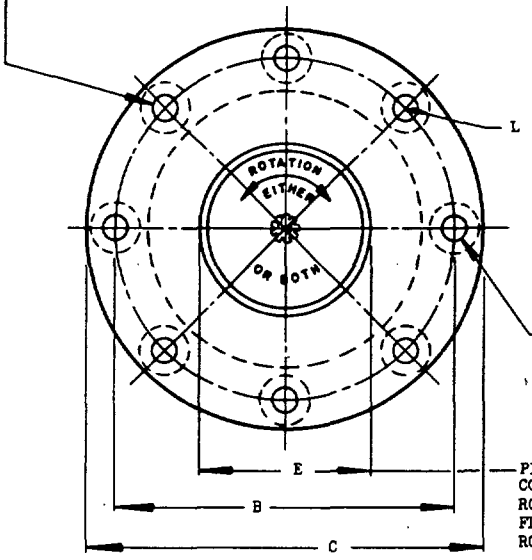

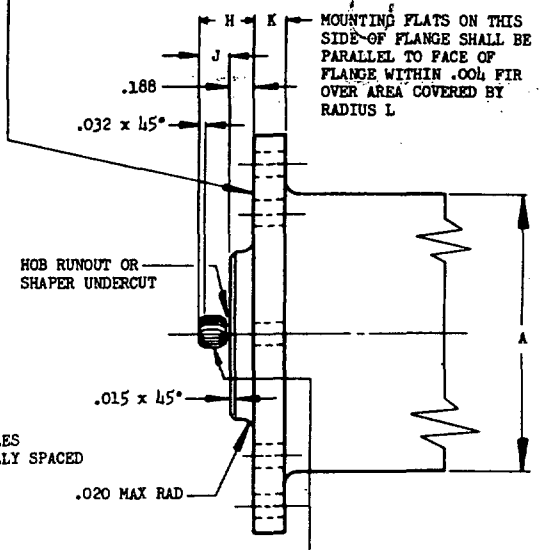


PILOT E DIAMETER TO BE CONCENTRIC WITH AXIS OF ROTATION WITHIN .003 FIR FLANGE AND SHAFT RELATIVELY ROTATING

COMPOSITE ERROR: TOOTH TO TOOTH TYPES V-VI .0007
TYPES VII-IX .0010
TOTAL: TYPES V-VI .0020
TYPES VII-IX .0025
WITH REFERENCE TO AXIS OF ROTATION, FLANGE AND SHAFT RELATIVELY ROTATING

SPLINE - PINION DATA
N = NUMBER OF TEETH
P = DIAMETRAL PITCH
20° PRESSURE ANGLE

ROCKWELL C OR EQUIVALENT HARDNESS:
SURFACE 45 MINIMUM 55 MAXIMUM
CORE 55 MAXIMUM

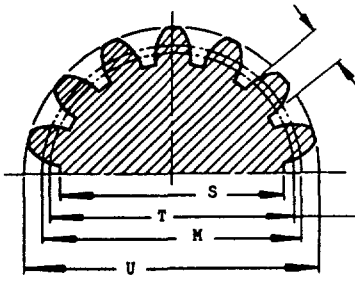

R CIRCULAR TOOTH THICKNESS AT PITCH DIAMETER M

TOOTH FORM OUTSIDE THIS DIAMETER SHALL BE TRUE INVOLUTE

SPLINE-PINION DETAIL

(a) A IS GREATEST DIAMETER OR DIMENSION OF ACCESSORY EXCLUSIVE OF ATTACHED DEVICES.
(b) OUTSIDE DIAMETERS OF SMALL PINIONS ARE ENLARGED TO AVOID UNDERCUT, TO MAINTAIN STANDARD CENTER DISTANCE, THE GEAR DIAMETERS MUST BE DECREASED BY THE AMOUNT OF THE PINION ENLARGEMENT GIVEN AT Q. IF MATING GEARS ARE MADE WITH STANDARD TOOTH PROPORTIONS, THE CENTER DISTANCES MUST BE INCREASED APPROXIMATELY BY 1/2 Q.
(c) OTHER MASTER GEARS MAY BE USED IF CENTER DISTANCE IS PROPERLY RECALCULATED.
(d) R MAXIMUM HAS BEEN REDUCED FROM THEORETICAL BY TOTAL COMPOSITE ERROR OF PINION ONLY, RANGE RESULTS FROM SIZE VAR ONLY.
(e) RANGE OF CENTER DISTANCE IS THAT RESULTING FROM RMS SUMMATION OF ALL VARIABLES IN THIS STRUCTURE.

SIZE DETERMINATION OF MATING GEAR MUST RECOGNIZE FURTHER VARIATIONS IN ITS SUPPORTING STRUCTURE.

SPLINE-PINION DIMENSIONS ARE BASIC MAXIMUM.

PINION DIMENSIONS ARE ADEQUATE FOR TYPE SHOWN BUT ALL PINIONS SHALL BE CHECKED FOR APPLICATION.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

NOMINAL USE OF THIS DRIVE FOR AC OR DC ELECTRICAL MOTORS.

(A) INACTIVE 1 JAN 1977 FOR NEW DESIGN SEE SAE STANDARDS AS959 THRU AS972, AS976 AND AS977. (CONTINUED APPLICATION OF THIS STANDARD ON CONTRACTS IN EFFECT PRIOR TO 1 JAN 1977 IS PERMISSIBLE).

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

THIS IS A DESIGN STANDARD, NOT USED AS A PART NUMBER.

APPROVED 30 Nov 55 REVISED (A) 26 NOV 1976

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS33569 (ASG)
Navy - AS Air Force 99	A - N - AF -	DRIVE, ROUND MOUNTING FLANGE WITH INVOLUTE SPLINE-PINION	
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: AND10455	SHEET 1 OF 2

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:05Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 672-1
1 OCT 52

PROCUREMENT SPECIFICATION
NONE

CUSTODIANS
Navy - AS
Air Force 99

OTHER INT.
A -
N -
AF -

SUPERSEDES: AN10455

MILITARY STANDARD

DRIVE, ROUND MOUNTING FLANGE WITH INVOLUTE SPLINE-PINION

MS33560 (ASG)

SHEET 2 OF 2

TYPE	(a) A MAX DIA	B BASIC DIA	C +.000 -.062 DIA	D	E +.000 -.002 DIA	F +.015 -.005 DIA	H ±.030	J MIN	K MAX	K MIN	L MIN RAD	M PD THEO	N	P	(b) Q THEO	(d) R MAX	(d) R MIN
V	4.688	5.750	6.750	6	4.748	.406	.719	.406	.438	.219	.421	.3889	14	36	.0100	.0467	.0464
VI	5.563	6.500	7.500	8	5.498		.844	.500				.5000	15	30	.0082	.0548	.0544
VII	6.563	8.000	9.000	12	6.998		.969	.625				.5714	16	28	.0046	.0568	.0562
VIII	8.125	9.000	10.000		7.998		1.219	.781				.6667		24	.0054	.0664	.0658
IX	9.125	10.000	11.000		8.998		1.406	.969				.8500	17	20	.0006	.0777	.0772

TYPE	S DIA THEO	T MAX DIA	U DIA MAX	U DIA MIN	W ±.0001 DIA	X ±.0001 DIA	MEASURE WIRE DIA	MEASUREMENT OVER 2 WIRES MAX	MEASUREMENT OVER 2 WIRES MIN	(c) MASTER GEAR NUMBER TEETH	(c) MASTER GEAR TOOTH THICKNESS	(e) CENTER DISTANCE WITH MASTER THEO	(e) CENTER DISTANCE WITH MASTER MAX	(e) CENTER DISTANCE WITH MASTER MIN
V	.3283	.3664	.4544	.4506	4.7490	.3936	.05333	.4774	.4767	72	.0436	1.1994	1.1997	1.1905
VI	.4242	.4708	.5747	.5710	5.4990		.0640	.6010	.6005	60	.0524	1.2540	1.2548	1.2444
VII	.4866	.5378	.6460	.6418	6.9990		.06857	.6796	.6786	84	.0561	1.7880	1.7873	1.7785
VIII	.5680	.6275	.7540	.7497	7.9990		.0800	.7932	.7922	72	.0654	1.8360	1.8363	1.8246
IX	.7266	.7998	.9492	.9449	8.9990		.0960	.9946	.9935	60	.0785	1.9253	1.9265	1.9121

(A) SEE SHEET 1 FOR CHANGES

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 30 Nov 55 REVISED (A) 26 NOV 1976

FED. SUP CLASS. 1500

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:05Z
Check the source to verify that this is the current version before use.