DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy - MC
Air Force -

DD FORM 1 MAY 73 672

P.A ARMY-CR

Other Cust NAVY-AS AF-85

International Interest

Procurement Specification MIL-C-26482

SUPERSEDES: MS 3475 (NAVY) MIL-C-83723/42A MIL-C-83723/43A

TITLE CONNECTORS, PLUG ELECTRIC, RFI SHIELDED, SERIES 2, CRIMP TYPE, BAYONET COUPLING, CLASSES L, S, AND W

(D) "ENTIRE STANDARD REVISED"


MILITARY STANDARD

MS 3475

PAGE 1 OF 4

FED. SUP CLASS 5935


5935-3465-5

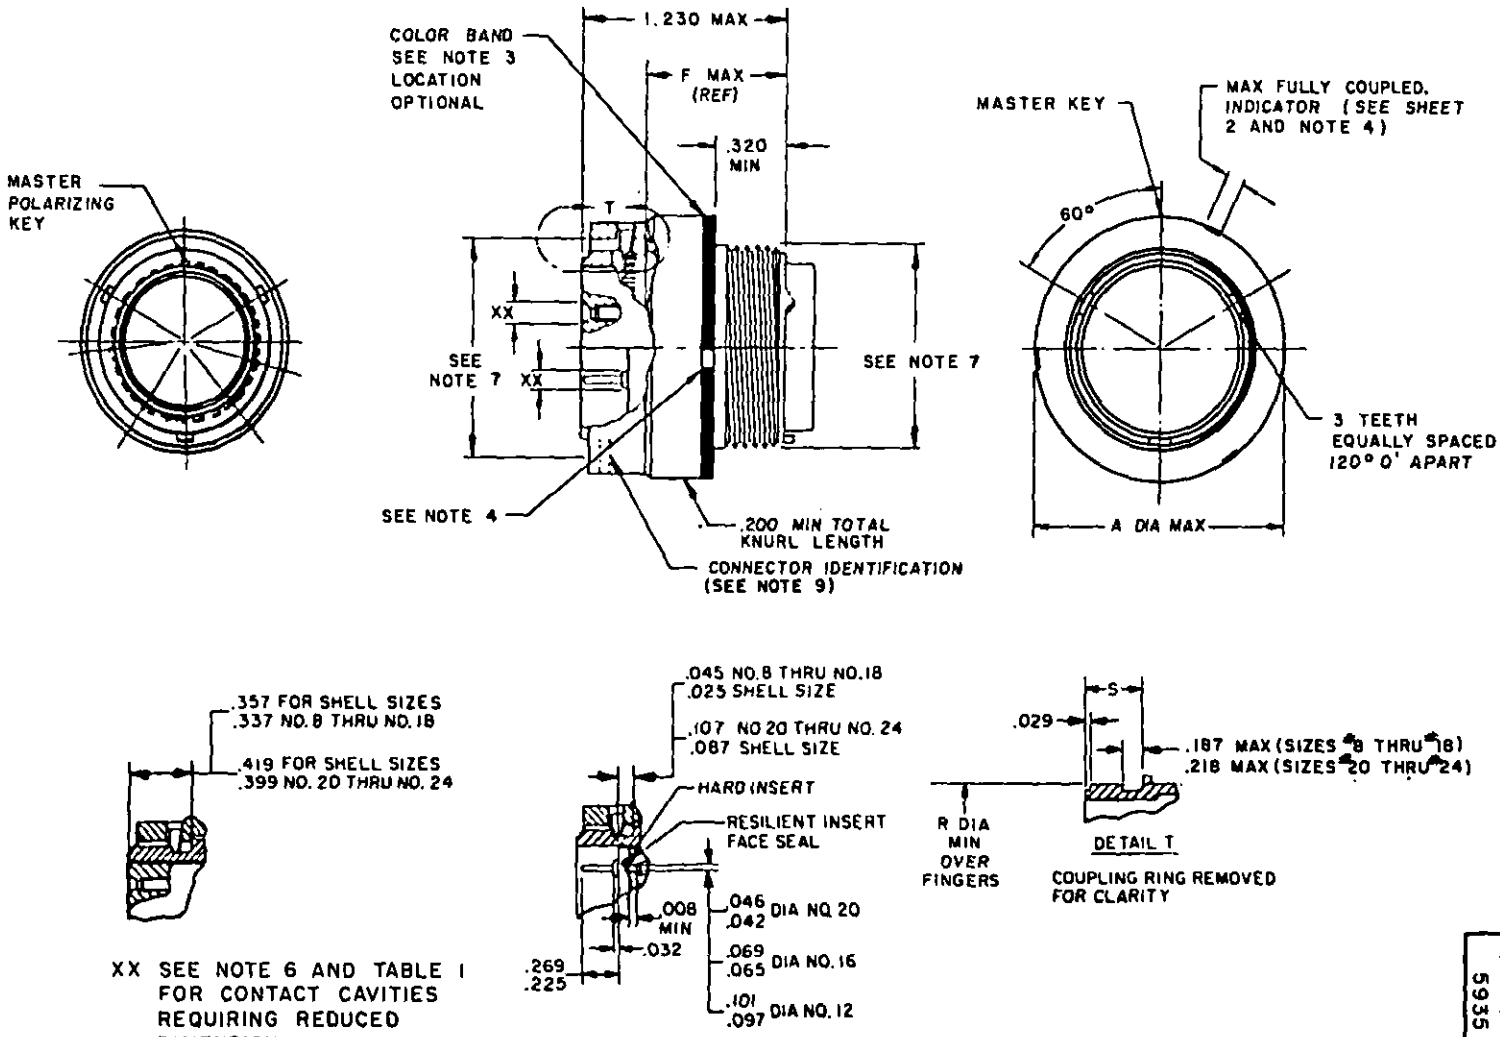



XX SEE NOTE 6 AND TABLE I FOR CONTACT CAVITIES REQUIRING REDUCED DIMENSION

APPROVED 1 APR 71 REVISED (D) 12 Jul 85

Source: https://assist.dla.mil -- Downloaded: 2023T13:07Z
Check the source to verify that this is the current version before use.




ASSEMBLED TO RFI BACKSHELL (SEE NOTE 6)

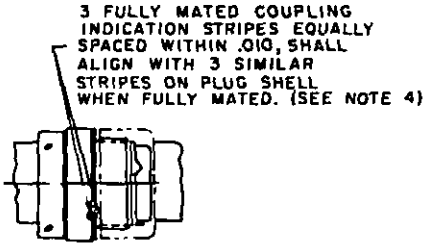


COUPLED POSITION

| Size | A | F | R | S | V''' | Max weight in lbs. * Pin | Socket |
|---|---|---|---|---|---|---|---|
| 8 | .782 (19.86) | .887 (22.53) | .369 (9.37) | .363/.343 (9.22/8.71) | 2.334 (59.28) | .0204 (.518) | .0216 (.549) |
| 10 | .926 (23.52) | .887 (22.53) | .497 (12.62) | .363/.343 (9.22/8.71) | 2.334 (59.28) | .0406 (1.031) | .0421 (1.069) |
| 12 | 1.043 (26.49) | .887 (22.53) | .614 (15.60) | .363/.343 (9.22/8.71) | 2.334 (59.28) | .0505 (1.283) | .0536 (1.361) |
| 14 | 1.183 (30.05) | .887 (22.53) | .739 (18.77) | .363/.343 (9.22/8.71) | 2.334 (59.28) | .0639 (1.623) | .0692 (1.758) |
| 16 | 1.305 (33.15) | .887 (22.53) | .864 (21.95) | .363/.343 (9.22/8.71) | 2.334 (59.28) | .0788 (2.002) | .0880 (2.235) |
| 18 | 1.391 (35.33) | .887 (22.53) | .969 (24.61) | .363/.343 (9.22/8.71) | 2.334 (59.28) | .0864 (2.195) | .0957 (2.431) |
| 20 | 1.531 (38.89) | .825 (20.96) | 1.094 (27.79) | .425/.405 (10.80/10.29) | 2.334 (59.28) | .1016 (2.581) | .1114 (2.830) |
| 22 | 1.656 (42.06) | .825 (20.96) | 1.219 (30.96) | .425/.405 (10.80/10.29) | 2.334 (59.28) | .1241 (3.152) | .1363 (3.462) |
| 24 | 1.777 (45.14) | .825 (20.96) | 1.344 (34.14) | .425/.405 (10.80/10.29) | 2.334 (59.28) | .1400 (3.556) | .1916 (4.867) |

* Less contacts and accessories. Maximum weights do not apply to class S.

APPROVED 1 APR 71 REVISED (D) FOR CHANGES SEE PAGES 1,2,3, AND 4 12 Jul 85

User activities: Army - AV, Navy - MC, Air Force -
Review activities: Army - AR, Navy - EC, SH, Air Force - 11, 17, 99
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A ARMY-CR<br>Other Cust<br>NAVY-AS<br>AF-85 | International interest | TITLE CONNECTORS, PLUG ELECTRIC, RFI SHIELDED, SERIES 2, CRIMP TYPE, BAYONET COUPLING, CLASSES L, S, AND W | MILITARY STANDARD<br>MS 3475 |
|---|---|---|---|
| Procurement Specification<br>MIL-C-26482 | | SUPERSEDES: MS 3475 (NAVY)<br>MIL-C-83723/42A MIL-C-83723/43A | PAGE 2 OF 4 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

| INCHES | MM | INCHES | MM |
|---|---|---|---|
| .008 | 0.20 | .101 | 2.57 |
| .010 | 0.25 | .107 | 2.72 |
| .025 | 0.64 | .187 | 4.75 |
| .029 | 0.74 | .200 | 5.08 |
| .032 | 0.81 | .218 | 5.54 |
| .042 | 1.07 | .225 | 5.72 |
| .045 | 1.14 | .269 | 6.83 |
| .046 | 1.17 | .320 | 8.13 |
| .065 | 1.66 | .337 | 8.56 |
| .069 | 1.75 | .357 | 9.07 |
| .087 | 2.21 | .399 | 10.13 |
| .097 | 2.46 | .419 | 10.64 |
| | | 1.230 | 31.24 |

TABLE I. Reduced diameters (XX).

| Shell size | Insert arrangements | Contact cavities |
|---|---|---|
| 8 | -33 & -98 | A, B, C |
| 12 | -10 | C, G |
| 14 | -12 | A, B, C, D, E, F, G, H |
| 14 | -18 | A, C, E, G, J, L |
| 14 | -19 | B, D, F, H, K, M |
| 16 | -26 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R |
| 18 | -32 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T |
| 22 | -41 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y |

Connector part numbering

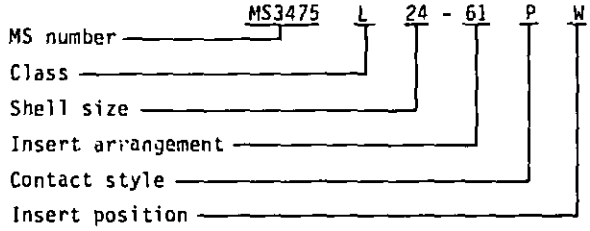


REVISED D FOR CHANGES SEE PAGES 1,2,3, AND 4 12 Jul 85

APPROVED 1 APR 71

User activities: Army - AV, Navy - MC, Air Force -

Review activities: Army - AR, Navy - EC, SH, Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | | |
|---|---|---|---|
| P.A ARMY-CR<br>Other Cust<br>NAVY-AS<br>AF-85 | International interest | TITLE CONNECTORS, PLUG ELECTRIC, RFI SHIELDED, SERIES 2, CRIMP TYPE, BAYONET COUPLING, CLASSES L, S, AND W | MILITARY STANDARD<br>MS3475 |
| Procurement Specification<br>MIL-C-26482 | | SUPERSEDES: MS3475 (NAVY)<br>MIL-C-83723/42A MIL-C-83723/43A | PAGE 3 OF 4 |

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.3 mm) for two place decimals, and angular tolerances are ±0° ±1' and 0° 0' ±30'.
3. Color band: .070 ±.031 wide, color blue.
4. Coupling indication indicator, color optional.
5. Connector assembly must be used with a backshell. Backshell must be procured separately. See MIL-C-85049 for applicable backshells.
6. Insert arrangements requiring reduced diameters for raised seal barriers or lead-in chamfer on outer row of contact cavities as indicated. (See table I).
7. Intermateability and rear accessory interchangeability dimensions shall be in accordance with MIL-C-26482.
8. For insert arrangements see MIL-STD-1669.
9. Connector identification marking shall be in accordance with MIL-C-26482. Example: MS3475 L----, M83723-42 R---- (minimum height does not apply to shell sizes 8, 10 and 12.)
10. Class E cancelled and replaced by class L.
11. The complete requirements for procuring this connector described herein shall consist of this document and the issue in effect of MIL-C-26482.
12. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
13. Referenced documents shall be of the issue in effect on date of invitations for bids.
14. Metric equivalents are given for general information only.

APPROVED 1 APR 71 REVISED (D) FOR CHANGES SEE PAGES 1,2,3,AND 4 12 Jul 85

User activities: Army - AV, Navy - MC, Air Force -

Review activities: Army - AR, Navy - EC, SH, Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| | | | |
|---|---|---|---|
| P.A ARMY-CR<br>Other Cust<br>NAVY-AS<br>AF-85 | International interest | TITLE CONNECTORS, PLUG ELECTRIC, RFI SHIELDED, SERIES 2, CRIMP TYPE, BAYONET COUPLING, CLASSES L, S, AND W | MILITARY STANDARD<br>MS3475 |
| Procurement Specification<br>MIL-C-26482 | | SUPERSEDES: MS3475 (NAVY)<br>MIL-C-83723/42A MIL-C-83723/43A | PAGE 4 OF 4 |

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.