
FED. SUP CLASS
2320

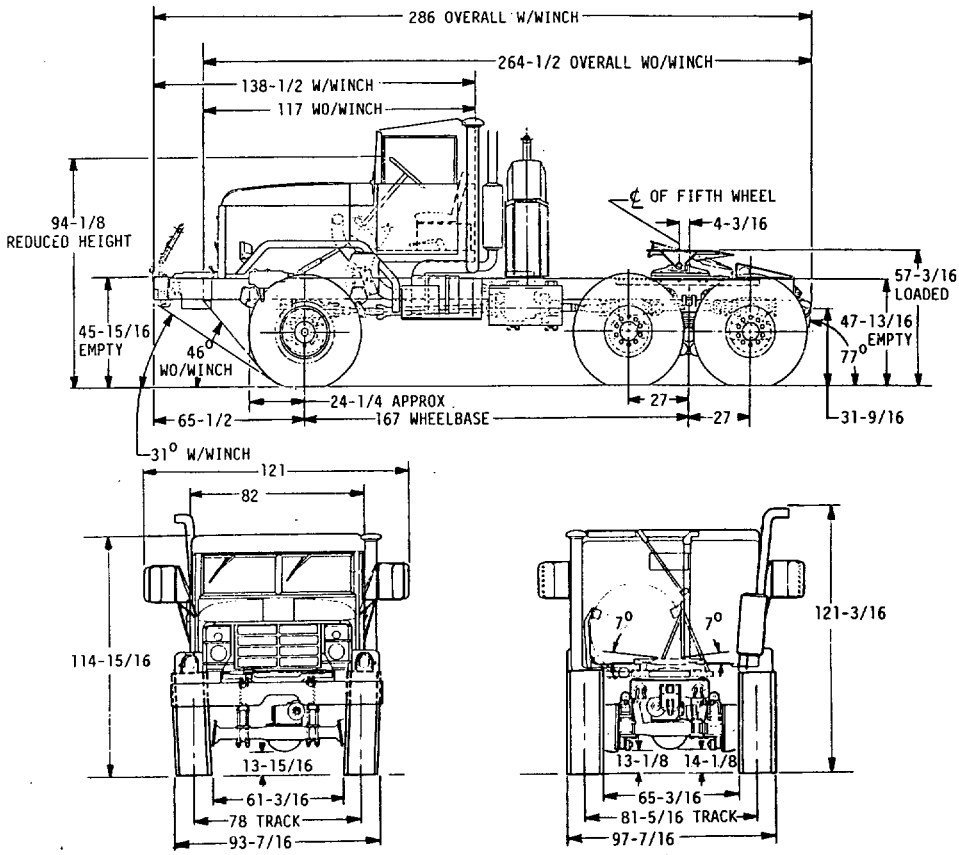

CAB: STD CANVAS; ARCTIC HARDTOP KIT
CAPACITY 3

WINCH: CAPACITY 9,500 LBS 7412382-1
WIRE ROPE CABLE 0.625 DIA X 200 FT LG

PINTLE: MS51117-1
MAX VERTICAL STATIC LOAD 1,500 LBS

TIEDOWNS: TOTAL 15; 6 L; 5 R 10883223
CAPACITY 1,600 LBS EA
LIFTING SHACKLES CAP 5,000 LBS 12301040
REAR SHACKLES (QTY 2) 7409523

PERFORMANCE: APPROX 4.0 MPG AT GCW
USING DIESEL FUEL-TYPE VV-F-800.

MAXIMUM SPEED	63 MPH
MAXIMUM GRADE	51 %
GRADEABILITY (HIGH GEAR)	.7
CRUISING RANGE	460 MI

FIFTH WHEEL: (KING PIN DIA 2) 11669413-1
APPROACH RAMPS AND DECK PLATES

ON-VEHICLE EQUIPMENT (OVE):

BASIC ISSUE ITEMS (BII)	12300877
ADDITIONAL AUTHORIZED ITEMS	12300998

ACCESSORY/SUPPLEMENTAL KITS: 12302863

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 4 OCT 85 REVISED

MODEL NO.	ENGINEERING DWG NO.	
M932A1	8750160	WITH WINCH
M931A1	8750159	LESS WINCH

P. A. ARMY-AT
Other Cust

INTERNATIONAL INTEREST

TITLE
TRUCK, TRACTOR: 5 TON, 6x6, M931A1/M932A1.

MILITARY STANDARD
MS52224(AT)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

VEHICLE CHARACTERISTICS

BRIDGE CLASSIFICATION (short tons):

	W/O W	W/W
EMPTY	9	10
WITH PAYLOAD	17	18

CURB WEIGHT, FULLY EQUIPPED LESS PAYLOAD & CREW:

FRONT	10,340 LBS	11,400 LBS
REAR BOGIE	10,800 LBS	10,840 LBS
TOTAL	21,140 LBS	22,240 LBS

TRAILER LOAD ON FIFTH WHEEL: 15,000 LBS 15,000 LBS

SEMI TRAILER WT (WITH PAYLOAD): 37,500 LBS 37,500 LBS

GROSS COMBINATION WEIGHT, FULLY EQUIPPED WITH PAYLOAD, LESS CREW. (ADD 600 LBS FOR 3 MAN CREW W/EQUIPMENT):

FRONT	10,710 LBS	11,770 LBS
REAR BOGIE	25,430 LBS	25,470 LBS
TRAILER BOGIE	22,500 LBS	22,500 LBS
TOTAL	58,640 LBS	59,740 LBS

TOWED LOAD ALLOWANCE (PINTLE): 15,000 LBS 15,000 LBS

MAXIMUM VERTICAL LOAD ON PINTLE: 1,500 LBS 1,500 LBS

SHIPPING DIMENSIONS:

CUBIC FEET	1,403	1,517
SQUARE FEET	179	194

CARGO SPACE:
CLOSED 909 CU FT
FULLY EXTENDED 1,770 CU FT

HEIGHT:
WITH MACHINE GUN RING MOUNT 127.8

ANGLE OF BREAKOVER (LOADED): 43°

MINIMUM TURNING RADIUS:
(WALL TO WALL) 39.2 FT 41.3 FT

FORDING DEPTH: 32.0 WITH KIT 80.0

CENTER OF GRAVITY (AT CURB WEIGHT):

ABOVE GROUND	37.7	38.9
REAR OF CENTERLINE OF FRONT AXLE	85.3	81.4

CENTER OF GRAVITY (WITH PAYLOAD):

ABOVE GROUND	N/A	N/A
REAR OF CENTERLINE OF FRONT AXLE	117.5	114.2

ENGINE:
6 CYL IN-LINE NO 11669328-1
COMPRESSION IGNITION FUEL INJECTION
DISPLACEMENT 855 CU IN
BORE AND STROKE 5.5 x 6
COMPRESSION RATIO 15.8:1
FUEL, DIESEL OCTANE/CETANE #40
HORSEPOWER: GROSS 240 @ 2100 RPM
NET 210 @ 2100 RPM
TORQUE: GROSS 658 LB-FT @ 1500 RPM
NET 600 LB-FT @ 1500 RPM
CRANKCASE CAPACITY W/O FILTER 24.0 QTS
W FILTER 28.0 QTS
GOVERNOR TYPE: MECHANICAL
COOLING SYSTEM CAPACITY: 40.0 QTS
PUMP TYPE DRIVE 2 V-BELTS
GOVERNED SPEED: 2100 RPM AT FULL LOAD

FUEL SYSTEM: 2 TANKS @ 58 GAL EACH
FUEL PUMP IN TANK; FUEL INJECTION

CLUTCH: NONE

TRANSMISSION: AUTOMATIC 11669085
NO OF SPEEDS 5 FORWARD, 1 REVERSE
RATIOS: 1ST 4.17:1; 2ND 2.21:1; 3RD 1.66:1
4TH 1.27:1; 5TH 1.0:1; REV 10.76:1 PTO
1 OPENING, SAE 6 BOLT RIGHT SIDE OF TRANS
LUBRICANT CAPACITY W&W/O PTO 17.0 QTS

TRANSFER CASE: W/PTO 11669327
NO OF SPEEDS 2 RATIOS HIGH 0.732:1
LOW 1.790:1
CONTROL OF FRONT AXLE DRIVE: AIR-ACTUATED, MANUAL ENGAGEMENT
LUBRICANT CAPACITY 6.75 QTS; 1 PTO OPEN.

AXLES: FRONT 12256540
REAR QTY 2 12256156
TYPE: SINGLE-SPEED, DOUBLE REDUCTION
RATIO 6.443:1
LUBRICANT CAPACITY 12.0 QTS EACH

FRAME: 12256416
TYPE: RAIL CHANNEL, SIDERAIL DIMENSIONS 9 X 3 X 0.31; SECTION MODULUS 10.7 IN
NO OF CROSSMEMBERS 5/6

FRONT SPRINGS: 3 WIDE X 50 LONG 7411110
NO OF LEAVES 12; RATE 2,271 LB/IN
TYPE SEMI ELLIPTICAL
SHOCK ABSORBERS DIRECT ACTING QTY 2

REAR SPRINGS: 4 WIDE X 59.25 LONG 7409613
NO OF LEAVES 13; RATE 5,983 LB/IN
TYPE SEMI ELLIPTICAL, INVERTED QTY 2

STEERING: HYDRAULIC W/POWER ASST 11668993
RATIO 20.4:1

TIRES: TUBELESS W/BEADLOCKS SIZE 14.00R20
LOAD RATING J; ALL TERRAIN TREAD; 1 SPARE

WHEELS: TWO PIECE STEEL DISC 12301115
20 DIA X 10.00 WIDE: OFFSET 5.09

BRAKES, SERVICE: AIR ACTUATED, SELF ADJUST
FRONT SINGLE ACTUATING; REAR DUAL ACTNG
DRUM SIZE FRONT & REAR 15 DIA x 7 WIDE
TOTAL EFFECTIVE AREA FRONT 432 SQ IN
REAR 864 SQ IN
SEMI TRAILER AIR LINES (QTY 2) 11669326
COUPLER (QTY 2) MS35746-1

BRAKES, PARKING: COMBINATION INTERNAL EXPANDING 12 DIA X 3 WIDE. DRUM AT REAR OF TRANSFER CASE AND FOUR SPRING EMERGENCY PARKING TYPE ON REAR AXLES.

ELECTRICAL SYSTEM: WATERPROOFED, RADIO SUPPRESSED PER MIL-STD-461
POTENTIAL 24 VOLTS; MOTOR MS53011-1
ALTERNATOR 60 AMP RATING 10929868
DRIVE 2 V-BELTS
BATTERIES QTY 4; TYPE 12V - 6TN MS35000-3
TRAILER COUPLING SOCKET 8376209
TURN SIGNAL, SOLID STATE FLASHER 11613631
CONTROL 11669166
LIGHTING: HEADLAMPS 8741462
B.O. DRIVING LAMP 8747988
COMPOSITE LAMPS: FRONT 11614156
REAR 11614157
SEMI TRAILER CONNECTION HARNESS 7728814

MODEL NO.	ENGINEERING DWG NO.	
M932A1	8750160	WITH WINCH
M931A1	8750159	LESS WINCH

APPROVED 4 OCT 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, TRACTOR: 5 TON, 6x6, M931A1/M932A1.	MILITARY STANDARD MS52224(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.