


FED SUP CLASS
5330

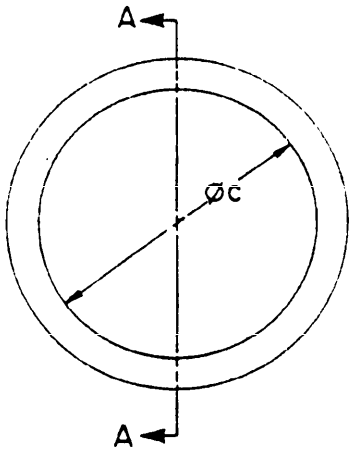

VIEW A-A

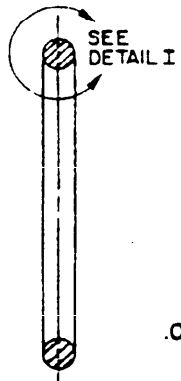

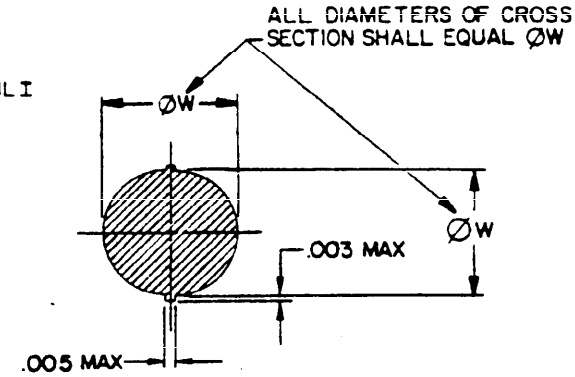

DETAIL I

TABLE I DASH NUMBERS AND DIMENSIONS.

DASH NO	ØC MIN	ØC MAX	ØW MIN	ØW MAX	MATERIAL	ENGINEERING DATA
-1	.359	.369	.067	.073	1/	INACTIVE FOR NEW DESIGN USE MS90064-10
-2	.565	.585	.057	.060		INACTIVE FOR NEW DESIGN USE MS90064-11
-3	.669	.679	.100	.106		—
-4	.853	.865	.135	.143		INACTIVE FOR NEW DESIGN USE MS90064-12
-5	1.333	1.343	.089	.095		INACTIVE FOR NEW DESIGN USE MS90064-13
-6	1.545	1.555	.089	.095		INACTIVE FOR NEW DESIGN USE MS90064-14
-7	2.099	2.119	.135	.143		INACTIVE FOR NEW DESIGN USE MS90064-15
-8	2.678	2.688	.110	.120		INACTIVE FOR NEW DESIGN USE MS90064-16
-9	3.960	3.990	.205	.215		INACTIVE FOR NEW DESIGN USE MS90064-17
-10	.421	.431	.067	.073	2/	—
-11	.565	.585	.057	.063		—
-12	.915	.927	.136	.142		—
-13	1.333	1.343	.089	.095		—
-14	1.545	1.555	.089	.095		—
-15	2.099	2.119	.135	.143		—
-16	2.668	2.698	.110	.120		—
-17	4.085	4.115	.205	.215		—

1/ SEE REQUIREMENT 1A

2/ SEE REQUIREMENT 1B

Ⓔ ENTIRE STANDARD REVISED

APPROVED 14 SEP 61 REVISED Ⓔ 29 FEB 88

USER ACTIVITIES:
ARMY-CR
NAVY-MC
AIR FORCE-82,85
NSA-NS

REVIEWER ACTIVITIES:
DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Copies from for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-EC Other Cust ARMY-CR AIR FORCE-99		PACKING, PREFORMED, ROUND (FOR USE WITH WAVEGUIDE FLANGES AND DUMMY LOADS)	MS90064
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		PAGE 1 OF 2

AMSC N/A

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.

5330-0741

FED. SUP CLASS
5330

REQUIREMENTS:

1. MATERIAL:
   A. COMPOSITION RUBBER SHALL BE IN ACCORDANCE WITH MIL-P-25732.

   B. UNLESS OTHERWISE SPECIFIED, MATERIAL SHALL BE SILICONE RUBBER CLASS 2b, GRADE 50 IN ACCORDANCE WITH ZZ-R-765, FOR WAVEGUIDE FLANGES; AND SILICONE RUBBER IN ACCORDANCE WITH AMS3304 FOR DUMMY LOADS.

2. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.

3. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS90064-8

   — DASH NUMBER

   — BASIC MS NUMBER

   MS90064-8 INDICATES: PACKING, PREFORMED, ROUND (FOR USE WITH WAVEGUIDE FLANGES AND DUMMY LOADS) DIAMETER "C", 2.678 MIN. 2.688 MAX; DIAMETER "W" .100 MIN.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
ARMY-CR
NAVY-MC
AIR FORCE-82,85
NSA-NS

REVIEWER ACTIVITIES:
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Sole issue for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 14 SEP 61 REVISED (E) FOR CHANGES SEE PAGES 1 2

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-EC Other Cust ARMY-CR AIR FORCE-99		PACKING, PREFORMED, ROUND (FOR USE WITH WAVEGUIDE FLANGES AND DUMMY LOADS)	MS90064
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		PAGE 2 OF 2

DD FORM 672-1

5330-0741

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.