INCH-POUND


MS90555F
13 March 2009
SUPERSEDING
MS90555E
3 January 2003

DETAIL SPECIFICATION SHEET

# CONNECTOR, RECEPTACLE, ELECTRICAL, WALL MOUNTING, CLASS L (POWER SOURCE RECEPTACLE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22992.

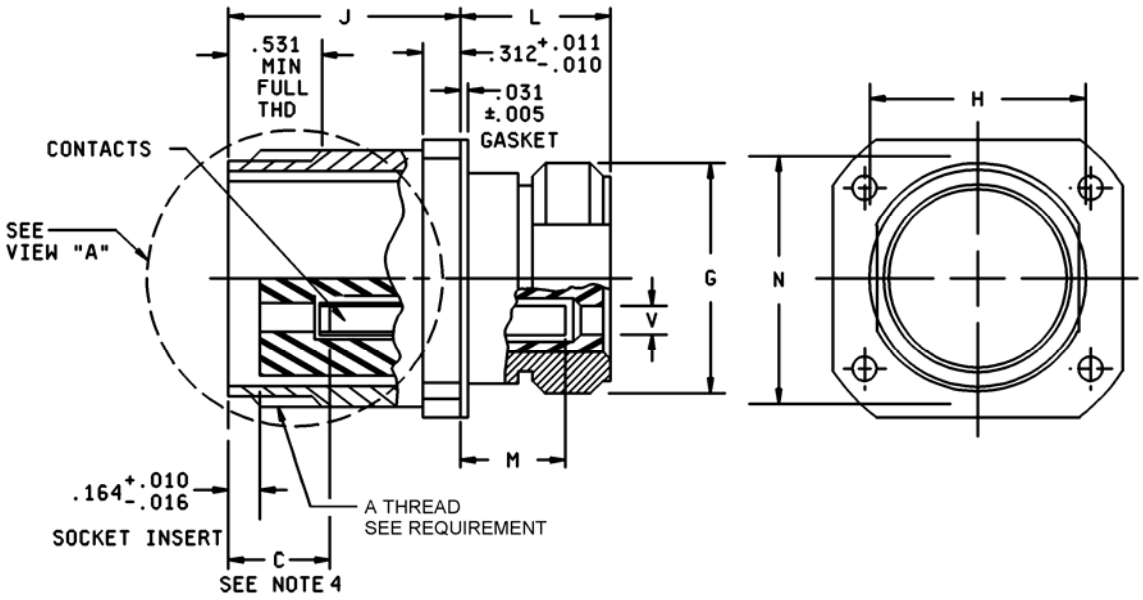


| Inches | mm |
|---|---|
| .005 | .13 |
| .010 | .25 |
| .011 | .28 |
| .016 | .41 |
| .031 | .79 |
| .164 | 4.17 |
| .312 | 7.92 |
| .531 | 13.49 |

FIGURE 1. Receptacle.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.


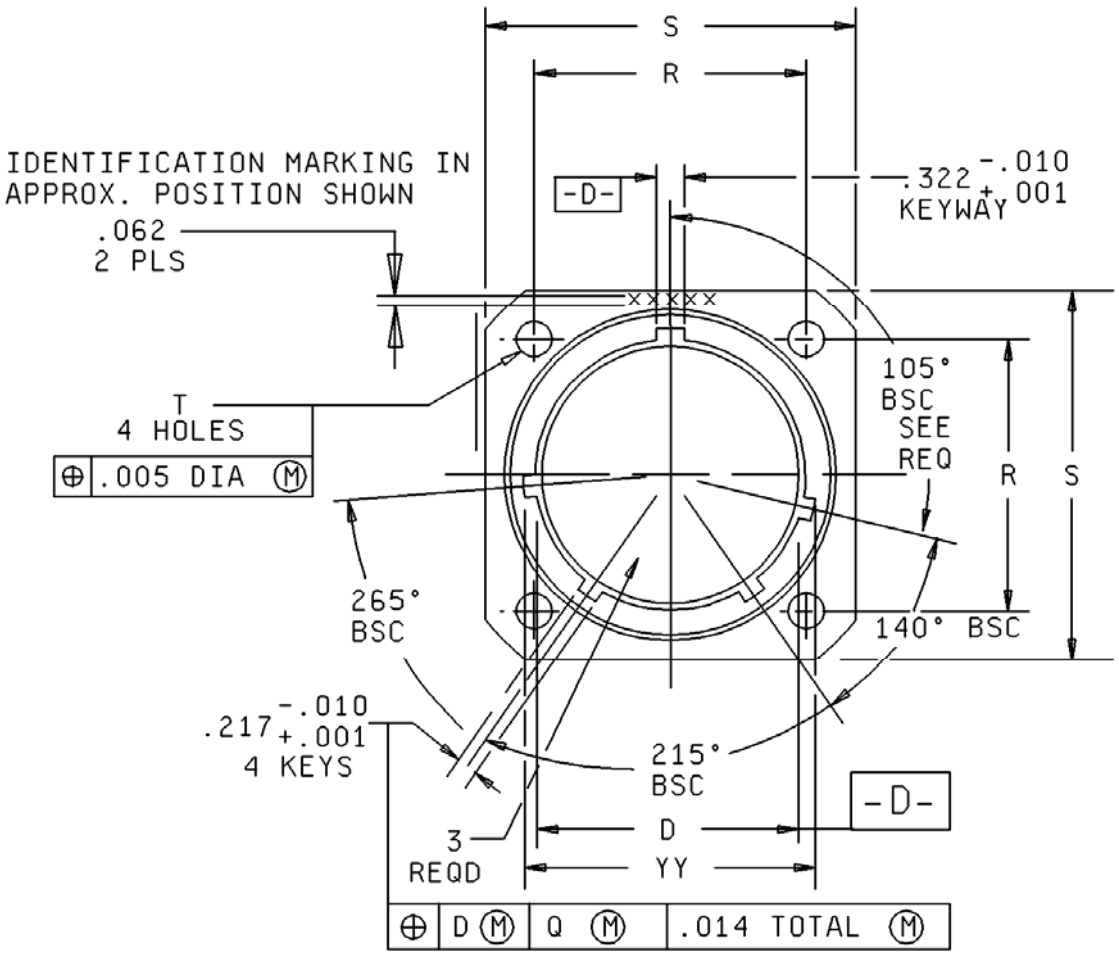



FIGURE 1. Receptacle – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

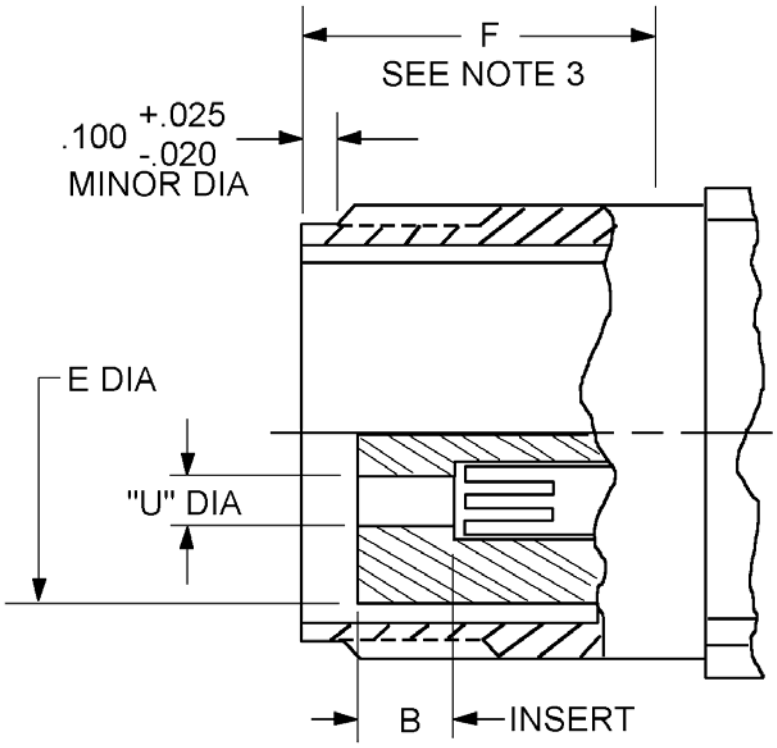


ENLARGED VIEW "A"

| Contact size | U dia | V dia Wire sealing range |
|---|---|---|
| 4 / 0 | .510 (12.95) / .515 (13.08) | .700 (17.78) / .790 (20.07) |
| 2 / 0 | .416 (10.57) / .421 (10.69) | .530 (13.46) / .655 (16.64) |
| 1 / 0 – 1 | .367 (9.32) / .372 (9.45) | .457 (11.61) / .585 (14.86) |
| 4 | .235 (5.97) / .240 (6.10) | .356 (9.04) / .430 (10.92) |
| 6 | .188 (4.78) / .193 (4.90) | .300 (7.62) / .360 (9.14) |

| Inches | mm |
|---|---|
| .020 | .508 |
| .025 | .635 |
| .100 | 2.54 |

FIGURE 1. Receptacle – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

| Shell size | A thread class 2A | B +.020 -.010 | | C max | | D dia +.005 -.010 | E dia max | F ±.005 |
|---|---|---|---|---|---|---|---|---|
| | | Phase & neutral | Ground | Phase & neutral | Ground | | | |
| 28 | 2.000-1428P-2857L | .523 (13.28) | .523 (13.28) | .913 (23.19) | .913 (23.19) | 1.538 (39.07) | 1.281 (32.54) | 1.514 (38.46) |
| 32 | 2.250-1428P-2857L | .523 (13.28) | .523 (13.28) | .913 (23.19) | .913 (23.19) | 1.788 (45.42) | 1.562 (39.67) | 1.514 (38.46) |
| 44 | 3.000-1428P-2857L | .742 (18.85) | .273 (6.93) | 1.138 (28.91) | .663 (16.84) | 2.545 (64.64) | 2.239 (56.87) | 1.733 (44.02) |
| 48 | 3.250-1428P-2857L | .742 (18.85) | .273 (6.93) | 1.156 (29.36) | .663 (16.84) | 2.755 (69.98) | 2.494 (63.35) | 1.733 (44.02) |
| 52 | 3.500-1428P-2857L | .742 (18.85) | .273 (6.93) | 1.156 (29.36) | .663 (16.84) | 3.005 (76.33) | 2.744 (69.70) | 1.733 (44.02) |

| Shell size | G dia +.006 -.010 | H +.001 -.010 | J +.016 -.000 | L ±.031 | M ±.047 | N dia +.011 -.020 | R (BSC) | S +.021 -.020 | T ±.005 | YY dia +.010 -.006 |
|---|---|---|---|---|---|---|---|---|---|---|
| 28 | 1.938 (49.23) | 1.812 (46.02) | 2.188 (55.58) | 1.376 (34.95) | .750 (19.05) | 2.000 (50.80) | 1.844 (46.84) | 2.375 (60.33) | .177 (4.50) | 1.692 (42.98) |
| 32 | 2.188 (55.58) | 2.062 (52.37) | 2.188 (55.58) | 1.376 (34.95) | .750 (19.05) | 2.250 (57.15) | 2.062 (52.37) | 2.625 (66.68) | .209 (5.31) | 1.942 (49.33) |
| 44 | 3.062 (77.77) | 2.812 (71.42) | 2.532 (64.31) | 1.438 (36.53) | .812 (20.62) | 3.125 (79.38) | 2.812 (71.42) | 3.375 (85.73) | .281 (7.14) | 2.692 (68.38) |
| 48 | 3.312 (84.12) | 3.062 (77.77) | 2.532 (64.31) | 1.438 (36.53) | .812 (20.62) | 3.375 (85.73) | 3.000 (76.20) | 3.625 (92.08) | .281 (7.14) | 2.911 (73.94) |
| 52 | 3.582 (90.98) | 3.312 (84.12) | 2.532 (64.31) | 1.438 (36.53) | .812 (20.62) | 3.625 (92.08) | 3.156 (80.16) | 3.875 (98.43) | .281 (7.14) | 3.161 (80.29) |

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerance is ± .016.(0.41 mm).
2. For protective cover, see MS90563.
3. F dimension from the front of the shell to the shoulder.
4. This is a depth at which a square ended gauge pin of the same basic diameter as the mating pin, first engages the spring of the socket contact.
5. Metric equivalent is given for information only.

FIGURE 1. Receptacle – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Mating: This receptacle mates with MS90556 plugs.

Inserts and contacts: Removable.

For final installation: Contacts will be assembled in all insert holes.

Shell and nut finish: C (conductive) or N (nonconductive).


Normal keyway position: See figure 1.

Alternate keyway position: See figure 2.

Insert arrangements: See MS90565, MS90567, MS14054, MS14055, and MS14057.


Cover: In accordance with MS90563, shall be supplied with the connector.

Part or Identifying Number (PIN) example:

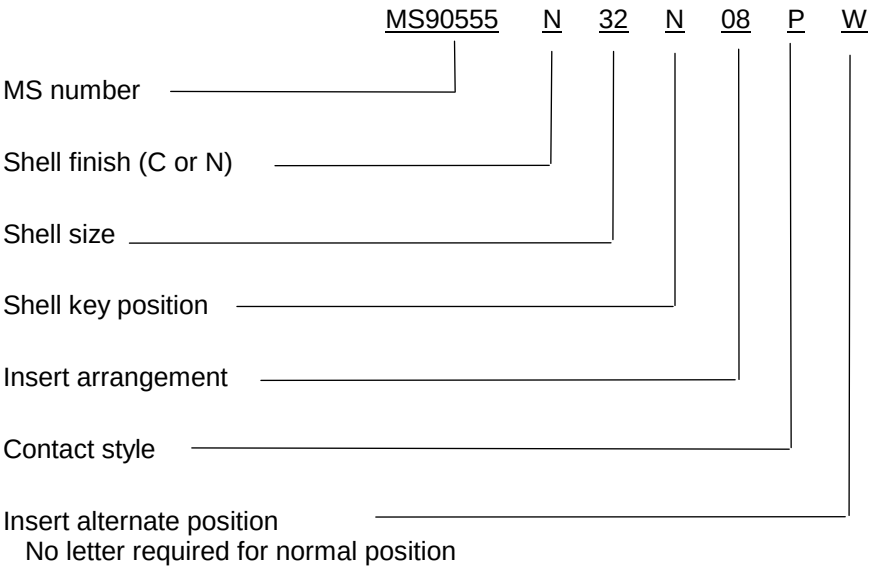




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

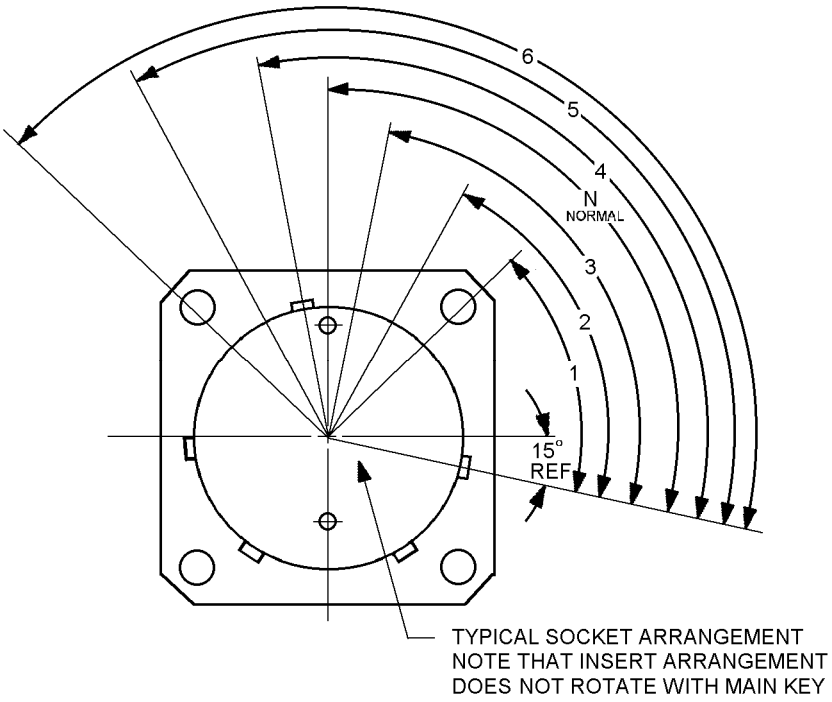


Finish N (nongrounding assemblies).

| Shell size | Shell main key positions 2 wire, 28 V dc |
|---|---|
| 28 | N (105°) |
| 32 | N (105°) |
| 44 | N (105°) |
| 48 | N (105°) |
| 52 | N (105°) |

FIGURE 2. Alternate key position.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

Finish C (grounding assemblies)

| Shell size | Shell main key position | | | | | | |
|---|---|---|---|---|---|---|---|
| | 1∅ | | | 3∅ | | | 3∅ (see note 2) |
| | 2 wire | | 3 wire | 4 wire | | | 3 wire |
| | 120 V | 240 V | 120/240 V | 120/208 V | 240/416 V | 277/480 V | 450/480 V |
| 28 | 4 (120°) | 5 (135°) | 4 (120°) | 4 (120°) | 5 (135°) | 6 (150°) | --- |
| 32 | 4 (120°) | 5 (135°) | 4 (120°) | 4 (120°) | 5 (135°) | 6 (150°) | --- |
| 44 | 4 (120°) | --- | 4 (120°) | 4 (120°) | 5 (135°) | 6 (150°) | 1 (60°) |
| 48 | --- | --- | 4 (120°) | 4 (120°) | 5 (135°) | 6 (150°) | --- |
| 52 | --- | --- | 4 (120°) | 4 (120°) | 5 (135°) | 6 (150°) | --- |

NOTES:
1. Discrimination of 60 Hz and 400 Hz assemblies is accomplished by alternate positioning of inserts. See applicable insert drawing for keying.
2. For Navy ground support equipment use only. Arrangements 44-51, 44-52 & 44-56 are not applicable.
3. Shell main key positions 2 and 3 are not used.

FIGURE 2. Alternate key position - Continued.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-22992, this document references the following:

MS14054
MS14055
MS14057
MS90563
MS90556
MS90565
MS90567



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army – MI
Navy – AS, CG, MC, OS
Air Force – 19

(Project 5935-2008-086)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.