
This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


Review activities:
USAF - 11


Users activities:-
Navy - MC, XH

MS9197

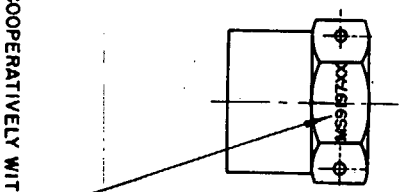

(a) MARK PART NUMBER PER AS 478 CLASS C MANUFACTURER'S IDENTIFICATION REQUIRED



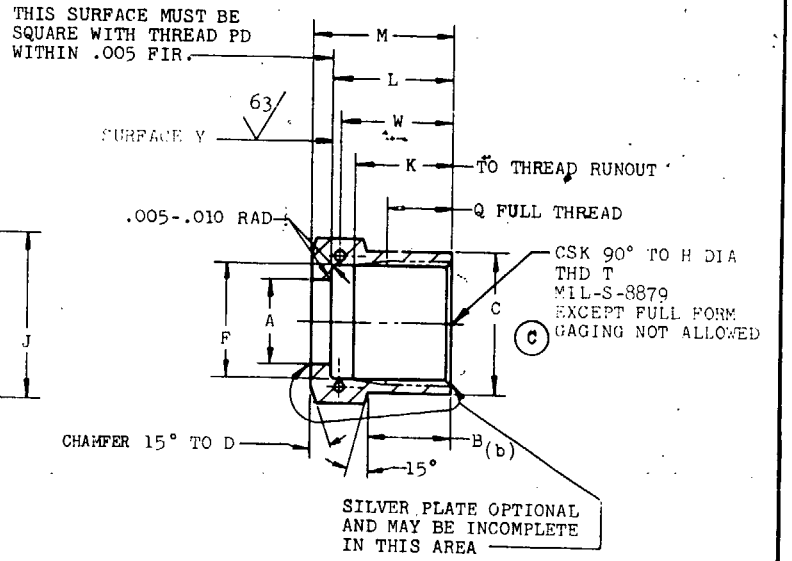

DIAMETERS A AND F SHALL BE CONCENTRIC TO THREAD PD WITHIN .004 FIR. DIAMETER C AND HEXAGON E SHALL BE CONCENTRIC TO THREAD PD WITHIN .010 FIR.

(a) MULTIPLE MARKING PERMISSIBLE PROVIDED POSITIVE IDENTIFICATION IS SHOWN. PARTS MUST BE MARKED BEFORE THREADING.

(b) TO THEORETICAL SHARP CORNER.

MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5646
SURFACE FINISH: SILVER PLATE AMS 2410 .0003-.0006 THICK ON THREAD AT PD AND SURFACE Y. DIMENSIONS SPECIFIED ARE AFTER PLATING.
(C) SURFACE TEXTURE: ANSI B46.1-1962 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEX.
FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED: FILLETS .005-.020 RAD OR CHAMFER.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

(C) FOR CHANGES SEE SHEETS 1 & 2

P.A. USAF - 82
Other Cust
Navy - AS (C)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

TITLE
NUT, TUBE COUPLING-CRES AMS 5646, SILVER PLATE

MILITARY STANDARD
MS9197

FED. SUP CLASS
4730

APPROVED 28 May 62 REVISED (A) 31 Jul 64 (B) 4 May 70 (C) 13 Dec 72

DD FORM 1 SEP 67 672-1
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23 13:12Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 4730

PART NO.	NOM TUBE OD REF	THREAD T	A DIA +.003 -.000	B ±.015 (b)	C DIA ±.005	D DIA	E	F DIA
MS9197-02	.125	.3125-24UNJF-3B	.180	.435	.425	.438	.430- .439	.272- .280
MS9197-03	.188	.375 -24UNJF-3B	.242	.452	.490	.500	.492- .502	.334- .342
MS9197-04	.250	.4375-20UNJF-3B	.305	.467	.550	.562	.553- .564	.388- .397
MS9197-05	.312	.500 -20UNJF-3B	.374	.440	.615	.625	.616- .627	.451- .459
MS9197-06	.375	.5625-18UNJF-3B	.440	.467	.678	.688	.679- .690	.508- .517
MS9197-07	.438	.625 -18UNJF-3B	.502	.493	.740	.750	.741- .752	.570- .579
MS9197-08	.500	.750 -16UNJF-3B	.570	.493	.865	.875	.865- .877	.689- .698
MS9197-09	.562	.8125-16UNJ-3B	.634	.493	.927	.937	.928- .940	.751- .760
MS9197-10	.625	.875 -14UNJF-3B	.698	.617	.990	1.000	.990-1.002	.805- .815
MS9197-11	.688	1.000 -12UNJF-3B	.770	.588	1.115	1.125	1.114-1.127	.918- .930
MS9197-12	.750	1.0625-12UNJ-3B	.834	.588	1.180	1.250	1.239-1.252	.981- .991
MS9197-14	.875	1.1875-12UNJ-3B	.961	.615	1.320	1.375	1.364-1.377	1.106-1.116
MS9197-16	1.000	1.3125-12UNJ-3B	1.089	.652	1.433	1.500	1.489-1.502	1.231-1.241
MS9197-18	1.125	1.500 -12UNJF-3B	1.217	.680	1.620	1.750	1.738-1.752	1.419-1.429
MS9197-20	1.250	1.625 -12UNJ-3B	1.347	.727	1.745	1.812	1.800-1.814	1.544-1.554
MS9197-24	1.500	1.875 -12UNJ-3B	1.617	.880	1.995	2.125	2.113-2.127	1.794-1.804
MS9197-28	1.750	2.250 -12UNJ-3B	1.890	.930	2.410	2.500	2.487-2.502	2.169-2.179
MS9197-32	2.000	2.500 -12UNJ-3B	2.167	1.060	2.660	2.750	2.737-2.752	2.419-2.429
MS9197-40	2.500	3.000 -12UNJ-3B	2.667	.860	3.200	3.250	3.237-3.252	2.919-2.929
MS9197-48	3.000	3.500 -12UNJ-3B	3.180	.910	3.700	3.812	3.798-3.814	3.419-3.429

NOM TUBE OD REF	H +.030 -.000	J MIN	K MAX	L ±.005	M	N	Q MIN	W	X	APPROX WEIGHT LB/100
.125	.312	.491	.425	.575	.650	.045-.050	.300	.535	.180- .190	1.210
.188	.375	.561	.441	.592	.667	.057-.062	.316	.552	.210- .220	1.475
.250	.438	.631	.482	.607	.682	.057-.062	.332	.567	.245- .255	1.830
.312	.500	.703	.482	.610	.690	.065-.075	.332	.565	.280- .290	2.600
.375	.562	.775	.535	.637	.742	.065-.075	.367	.592	.310- .320	2.920
.438	.625	.846	.536	.663	.768	.065-.075	.368	.618	.336- .356	3.422
.500	.750	.987	.569	.723	.828	.065-.075	.383	.648	.400- .420	4.680
.562	.812	1.059	.569	.723	.828	.065-.075	.383	.668	.427- .447	5.314
.625	.875	1.130	.667	.817	.927	.065-.075	.453	.777	.465- .485	6.310
.688	1.000	1.271	.738	.868	.968	.065-.075	.488	.818	.520- .540	7.859
.750	1.062	1.414	.738	.868	.968	.065-.075	.488	.818	.580- .600	9.907
.875	1.188	1.556	.765	.915	1.015	.065-.075	.515	.865	.645- .665	12.164
1.000	1.312	1.699	.786	.962	1.062	.065-.075	.536	.912	.715- .735	13.637
1.125	1.500	1.935	.800	.990	1.120	.065-.075	.550	.945	.840- .860	19.830
1.250	1.625	2.054	.810	1.017	1.167	.065-.075	.560	.967	.890- .910	20.016
1.500	1.875	2.411	.937	1.170	1.320	.065-.075	.687	1.100	1.040-1.060	27.903
1.750	2.250	2.838	.945	1.170	1.370	.065-.075	.695	1.170	1.255-1.275	41.710
2.000	2.500	3.123	1.050	1.300	1.500	.065-.075	.800	1.300	1.395-1.415	49.000
2.500	3.000	3.693	.850	1.100	1.300	.065-.075	.600	1.100	1.680-1.700	60.621
3.000	3.500	4.334	.900	1.150	1.350	.065-.075	.650	1.150	2.000-2.020	78.529

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 28 May 62 REVISED (C) FOR CHANGES SEE SHEETS 1 AND 2.

Users activities: Navy - MC, XH

Review activities: USAF - 11

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-82 (C)
Other Cust Navy - AS

TITLE: NUT, TUBE COUPLING - CRES AMS 5646, SILVER PLATE

MILITARY STANDARD
MS9197

PROCUREMENT SPECIFICATION NONE

SUPERSEDES:

SHEET 2 OF

DD FORM 1 SEP 67 672-1

Source: https://assist.dla.mil - Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.