
MS9800

FED. SUP CLASS
5306

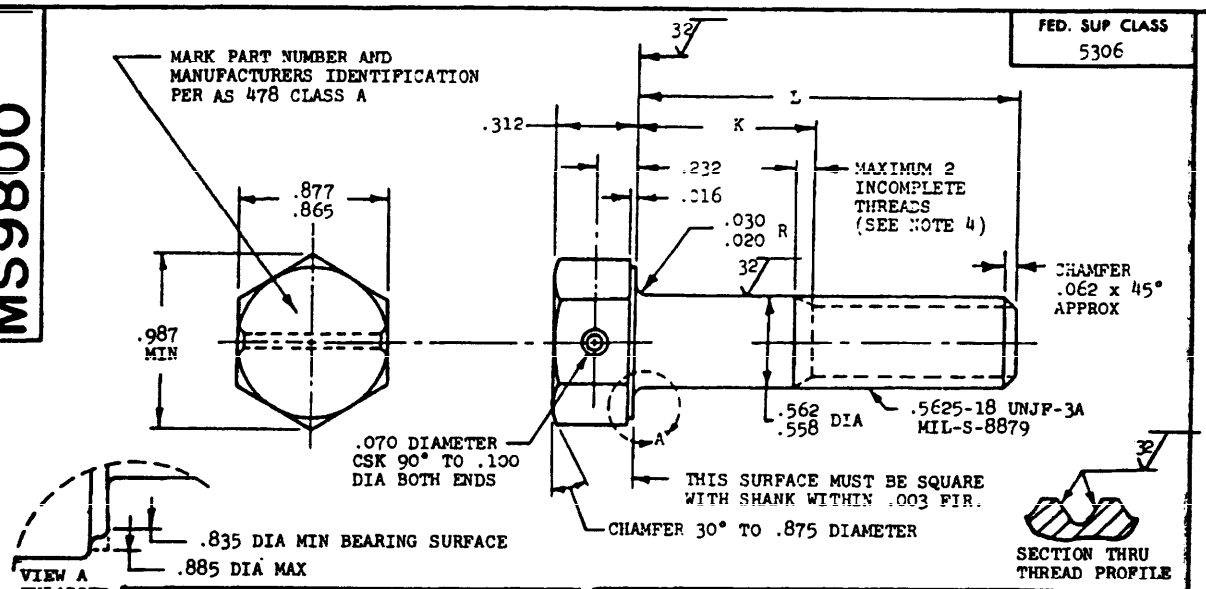

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9800-15	1.562	.128- .188	15.96
MS9800-16	1.625	.190- .250	16.30
MS9800-17	1.688	.252- .312	16.83
MS9800-18	1.750	.315- .375	17.26
MS9800-19	1.812	.378- .438	17.70
MS9800-20	1.875	.440- .500	18.13
MS9800-21	1.938	.502- .562	18.57
MS9800-22	2.000	.565- .625	19.00
MS9800-23	2.125	.690- .750	19.87
MS9800-24	2.250	.815- .875	20.74
MS9800-25	2.375	.940-1.000	21.60
MS9800-26	2.500	1.065-1.125	22.47
MS9800-27	2.625	1.190-1.250	23.34
MS9800-28	2.750	1.315-1.375	24.21
MS9800-29	2.875	1.440-1.500	25.07
MS9800-30	3.000	1.565-1.625	25.94
MS9800-31	3.125	1.690-1.750	26.81
MS9800-32	3.250	1.815-1.875	27.68
MS9800-33	3.375	1.940-2.000	28.54
MS9800-34	3.500	2.065-2.125	29.41
MS9800-35	3.625	2.190-2.250	30.28
MS9800-36	3.750	2.315-2.375	31.16
MS9800-37	3.875	2.440-2.500	32.03
MS9800-38	4.000	2.565-2.625	32.89
MS9800-39	4.125	2.690-2.750	33.76
MS9800-40	4.250	2.815-2.875	34.63
MS9800-41	4.375	2.940-3.000	35.50
MS9800-42	4.500	3.065-3.125	36.36
MS9800-43	4.625	3.190-3.250	37.23
MS9800-44	4.750	3.315-3.375	38.10
MS9800-45	4.875	3.440-3.500	38.97
MS9800-46	5.000	3.565-3.625	39.83
MS9800-47	5.125	3.690-3.750	40.70
MS9800-48	5.250	3.815-3.875	41.57
MS9800-49	5.375	3.940-4.000	42.44
MS9800-50	5.500	4.065-4.125	43.31
MS9800-51	5.625	4.190-4.250	44.17
MS9800-52	5.750	4.315-4.375	45.04
MS9800-53	5.875	4.440-4.500	45.91
MS9800-54	6.000	4.565-4.625	46.78

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .026 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5643.
6. HARDNESS: ROCKWELL C32-38.
7. MANUFACTURING SPECIFICATION: AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

(B) REINSTATED 31 OCT 84

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 11 MAR 70 REVISED (A) 21 DEC 83 (B) 31 OCT 84

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable. IR FORCE—82 LA —IS

P.A. AS / Other Cust (B) AV 99	INTERNATIONAL INTERN (B)	TITLE: BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, FULL SHANK, AMS 5643, .5625-18 UNJF-3A	MILITARY STANDARD MS9800
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	PAGE 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306 0880

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:25Z
Check the source to verify that this is the current version before use.