MIL-A-48608A (AR)
15 March 1982
SUPERSEDING
MIL-A-48608 (MU)
15 December 1976

MILITARY SPECIFICATION

AMPLIFIER, DOPPLER BOARD ASSEMBLY: 11740262

This specification is approved for use by the US Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, quality assurance provisions, and packaging for a doppler amplifier board assembly used in Radar Receiver R-1475/VPS-2, part of Radar Set AN/VPS-2.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	- Fire Control Material: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	- Parts, Equipment, and Tools for Army Material; Packaging and Packing of
MIL-I-45607	- Inspection Equipment, Acquisition, Maintenance, and Disposition of
MIL-C-46357	- Computer, Gun Direction; M18 Manufacturing Processes and Inspection of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T10:33Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.4)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND (ARRADCOM)

D11740262 - Doppler Amplifier Board Assembly

PACKAGING DATA SHEET

D11740262 - Packaging of Doppler Amplifier Board

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Fabrication. The doppler amplifier shall be manufactured in accordance with Drawing 11740262 and drawings pertaining thereto.

3.2 General specifications. Where applicable, the doppler amplifier shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

3.2.1 MIL-F-13926.

a. Order of precedence

b. Dimensions and tolerances

c. Inorganic protective surface finishings

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

d. Part identification and marking

e. Workmanship

f. Soldering electrical connections

3.2.2 MIL-C-46357.

a. Etched circuit assemblies

b. Wiring

c. Threaded fasteners

d. Marking

e. Finishes

3.3 Environmental service conditions.

3.3.1 Vibration. The doppler amplifier shall be mounted on the vibration table in normal service position. The doppler amplifier shall meet the requirements of 3.5 after being subject to continuous vibration for 2 hours along each of three mutually perpendicular axes within the frequency range of 10 to 55 hertz (Hz) and a half amplitude excursion of 1/64 inch. The rate of change of frequency at each frequency range shall not exceed 1 Hz per second. Vibration tests shall be conducted under ambient room conditions.

3.3.2 Shock. The doppler amplifier shall not suffer damage and shall meet the requirements of 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of three mutually perpendicular axes. The shock impulses shall have an acceleration of 15 gravity units (G) and a pulse duration of 11 ±1 milliseconds (ms). The G value of each impulse shall be within ±10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5.5 ms.

3.3.3 Altitude.

3.3.3.1 Operating. The doppler amplifier shall meet the requirements of 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg).

3.3.3.2 Nonoperating. The doppler amplifier shall meet the requirements of 3.5 after exposure for not less than 1 hour to barometric pressure encountered at 40,000 feet above sea level (5.5 inches Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature.

3.3.4.1 Operating. The doppler amplifier shall meet the requirements of 3.5 when stabilized thermally at any temperature between -40°F and +115°F.

3.3.4.2 Nonoperating (storage). The doppler amplifier shall not suffer permanent damage when subjected to not less than 4 hours at each temperature extreme of -65°F and +160°F, and shall meet the requirements of 3.5 when returned to room ambient.

3.3.5 Humidity (nonoperating). The doppler amplifier shall meet the requirements of 3.5 after exposure to an atomophere with a relative humidity of 95 ±5 percent for a period of not less than 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the doppler amplifier.

3.5 Performance.

3.5.1 Input voltage. The input voltage to the doppler amplifier P.C. Board shall be 25.0 ±0.1 volts direct current (Vdc) at 25 milliamps (ma) applied to terminals E5 (+) and E4 (return).

3.5.2 Output noise. With the input signal terminals E6 and E7 open circuited, the output noise at E3 (E4 return) shall be 50 millivolts (mV) peak-to-peak (P-P) maximum, excluding any 60 Hz noise.

3.5.3 Gain. With an input signal frequency of 1KHz applied to terminals E6 and E7 (signal return) at a level sifficient to produce 300.0 ±0.1 mV at the output terminal E3 (E4 return) and the gain shall be 79.0 ±1.5dB.

3.5.4 Frequency response. With the input held constant at that level required to meet the condition of 3.5.3, and the input frequency is varied between 900Hz and 10KHz, the output level measured at E3 (E4 return) shall not vary a total of more than 1.0dB. When the input frequency is increased to 20KHz, the output level shall be at least 2dB below the highest level observed between 900Hz and 10KHz.

3.5.5 Limiting action. With the input signal level at 1KHz, applied to E6 (E7 return) adjusted to just below output limiting (limiting threshold) the output voltage at E3 (E4 return) shall be 1.5 ±0.5 volts P-P. When the input level is increased by 20dB and then 40dB above limiting threshold, the output level shall not be greater than 2.0 volts P-P.

3.5.6 Stability. When the input level is increased 65dB above the limiting threshold, there shall be no indication of instability of the output waveform.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

3.6 First article inspection. This specification makes provisions for First Article Inspection. Requirements for the submission of First Article Samples by the contractor shall be as specified in the contract.

3.7 Workmanship. All parts and assemblies shall be free from burrs, chips, sharp edges, cracks, unblended radii, surface blisters, excess flash, corrosion products, and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agents. Surface coating shall be continuous except for a few slight scratches not exposing the base material. The assembly operations shall be performed in a thorough, workmanlike manner consistent with the best practices of the industry. All required markings shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisioning. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) submission. The requirement for first article approval and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three doppler amplifiers manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.2.2 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all requirements of the contract. The sample and a record of this inspection, including certification for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product. Unless otherwise specified by the contracting officer, inspection lot size, lot formation, and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in applicable Supplementary Quality Assurance Provision (SQAP). In the absence of SQAP's, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.3.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in 4.3.2.3 and 4.4 herein. Examination and test for packaging and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in 4.3.2.3 and 4.4 shall consistute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.3.2.3 Functional tests. The requirements and tests in Table I shall be inspected on a 100 percent basis. All examinations and tests shall be conducted at the standard ambient temperature (60°F to 90°F).

TABLE I. Classification of defects
(100 percent inspection)

Characteristic		Requirement	Test Procedure
Critical: None			
Major:			
101.	Electrical	3.4	4.6.2
102.	Performance	3.5	4.6.3
Minor: None			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.3.3 Acceptance and rejection. Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling. One doppler amplifier shall be selected at random by a Government representative as a control sample from each 100 produced. The control sample shall meet the requirements and tests in Table II. Three doppler amplifiers shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever occurs first. The control samples shall meet the requirements and tests in Table III.

TABLE II. Special sampling

Control Test	Requirement	Test Procedures
301. Fabrication	3.1	Applicable Drawings - Visual
302. General Specifications	3.2	MIL-F-13926 & MIL-C-46357 - Visual

TABLE III. Special sampling, environmental

Characteristic	Requirement	Test Procedure
303. Vibration	3.3.1	4.6.1.1
304. Shock	3.3.2	4.6.1.2
305. Altitude	3.3.3	4.6.1.3
306. Temperature	3.3.4	4.6.1.4
307. Humidity (nonoperating)	3.3.5	4.6.1.5

4.4.1 Failure of sample. Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved (see 4.3.3).

4.5 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment. Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with applicable documentation.

4.5.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Test equipment. In conjunction with 4.5.2.2, the standard test equipment listed in Table IV shall be utilized in performing the applicable test of 4.6.

4.6 Test methods and procedures.

4.6.1 Environmental. Environmental tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 except as specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810.

4.6.1.1 Vibration. The test shall be performed as specified in Method 514, Procedure VIII, of MIL-STD-810 as modified by 3.3.1 herein. After vibration, the doppler amplifier shall be tested as specified in 4.6.3 to determine compliance with 3.3.1.

4.6.1.2 Shock. This test shall be performed as specified in Procedure I, Method 516, of MIL-STD-810 except that shock pulses shall be 11.0 ms and 15 G. After the shock impulses, the doppler amplifier shall be tested as specified in 4.6.3 to determine compliance with 3.3.2.

4.6.1.3 Altitude (nonoperating and operating). This test shall be performed as specified in Procedure I, Method 500, of MIL-STD-810 except that the operating altitude shall be limited to 10,000 feet (20.6 inches of Hg). Operation shall be the performance tests of 4.6.3 herein. Nonoperating test at 40,000 feet (5.5 inches Hg) shall also be performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and nonoperating). This test shall be performed as specified in Procedure I, Method 501, of MIL-STD-810. The temperature of Step 2 shall be +160°F. The temperature of Step 3 shall be maintained for not less than 4 hours. The temperature of Step 4 shall be +155°F. In Step 5, the temperature shall be maintained for 4 hours and the doppler amplifier shall be tested in accordance with 4.6.3 during this time.

4.6.1.4.2 Low (operating and nonoperating). This test shall be performed as specified in Procedure I, Method 502, of MIL-STD-810. The temperature of Step 2 shall be -65°F maintained for not less than 4 hours. The temperature of Step 4 shall be -40°F. In Steps 5 and 7, the doppler amplifier shall be tested in accordance with 4.6.3.

4.6.1.5 Humidity (nonoperating). This test shall be performed in accordance with Procedure II, Method 507, of MIL-STD-810. The doppler amplifier shall be tested in accordance with 4.6.3.

4.6.2 Electrical. Continuity shall be inspected by standard measuring equipment (SME), and visual examination for compliance with 3.4.

4.6.3 Performance. The doppler amplifier shall be tested as follows: Set up the equipment as shown in Figure 1. Do not apply power to the doppler amplifier under test. All test equipment is to be connected to its 110 V, 60 Hz source through three-prong grounding plugs. All test equipment, except the oscilloscope, shall be placed on the brass test plate, Item 7. The oscilloscope must have a ground strap connected to the brass test plate.

4.6.3.1 Input voltage. Apply the input voltage as specified in 3.5.1.

4.6.3.2 Output noise. With no input signal applied to terminals E6 and E7, use the oscilloscope, Item 5, to meaure the output noise level as specified in 3.5.2.

4.6.3.3 Gain. Adjust the attenuator, Item 3, for 80 decibels (dB) and connect the high side output to E6 and the low side to E7 of the doppler amplifier board assembly (UUT). Set the audio oscillator, Item 1, to 1 KHz and set its output level for a reading of 300.0 +0.1mV rms measured at the output terminal E3 (E4 ret.) of the UUT, using the digital ac voltmeter, Item 6. Using the same ac voltmeter, measure the signal level at the output of the audio oscillator, Item 1. It shall be not less than 317.8mV rms and not more than 378.0mV rms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

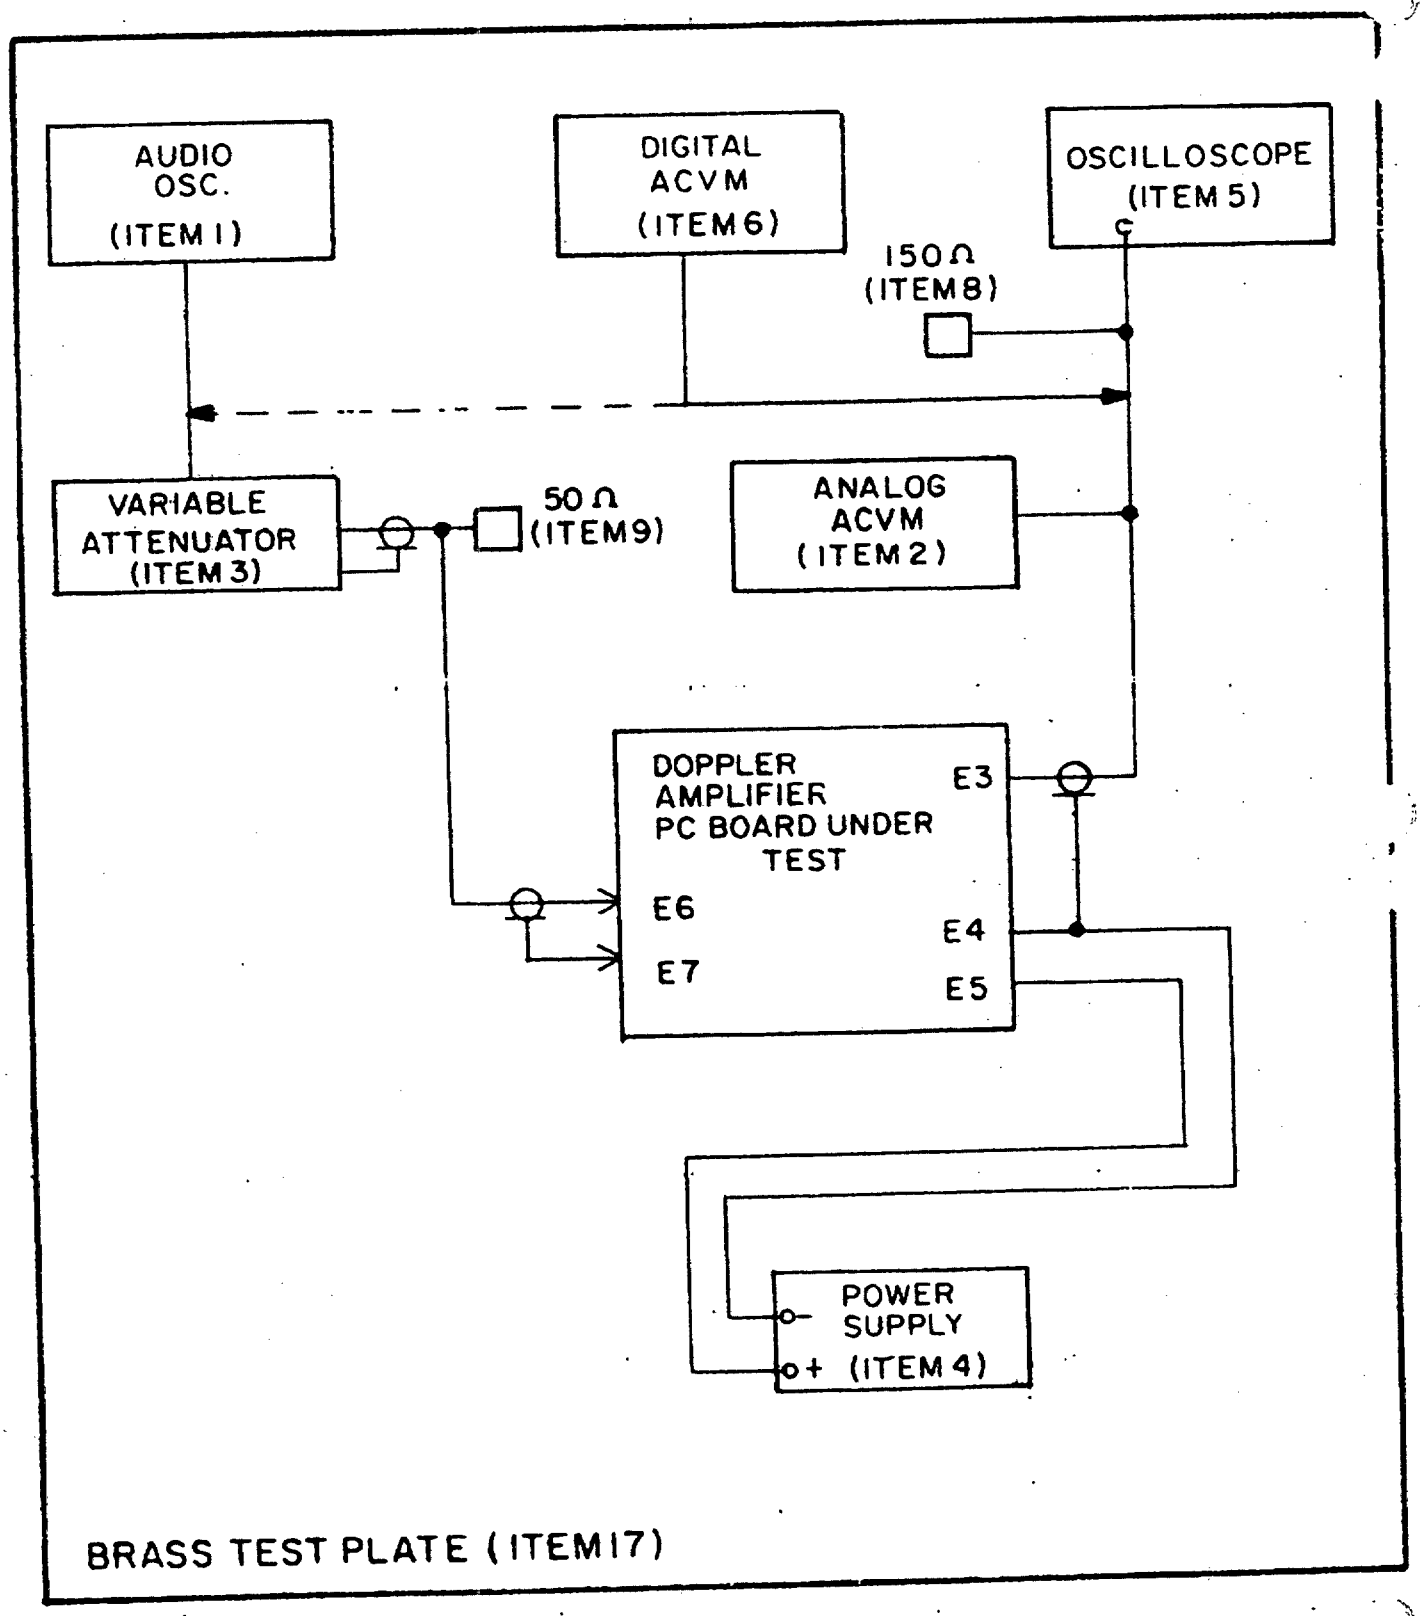


FIGURE 1. TEST EQUIPMENT SETUP

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.6.3.4 Frequency response. Monitor the output level of the UUT at Terminal E3 (E4 ret.) with the analog ac voltmeter, Item 2. While holding the output level at the audio oscillator, Item 1, constant at that voltage noted in 4.6.3.3, slowly vary its frequency between 900 Hz and 10 KHz while noting the highest and lowest output level of the UUT. The difference between the highest and lowest output level shall be 1.0dB maximum.

4.6.3.4.1 Frequency response output. Increase the frequency to 20 KHz and note the output level of the UUT. It shall be at least 2.0dB below the highest level in the 900 Hz to 9 KHz range.

4.6.3.5 Limiting action. With the input signal applied as in 4.6.3.3, use the oscilloscope, Item 5, to observe the top of one cycle of the output signal and decrease the variable attenuator setting, Item 3, until the top of the sine wave just starts to flatten out. The output signal at the point of limiting shall be 1.5 +0.5 volts peak-peak (P-P). Remove 20dB, then an additional 20dB from the attenuator, Item 3, and observe that the output signal level does not increase above 2.0V P-P in either case.

4.6.3.6 Stability. With the conditions of 4.6.3.5 set up for threshold of limiting, remove 65dB from the attenuator, Item 3, and observe that the output waveform shows no sign of instability.

TABLE IV. Test equipment list

Item number	Description	
1. Audio Oscillator	Frequency:	600 Hz to 20 KHz
	Amplitude:	10 to 400 mV variable
	Output Impedance:	50 ohms
	Max. Hum & Noise:	60dB below rated output
2. Analog AC Voltmeter	Voltage Range:	To 400 mV
	Frequency Range:	600 Hz to 20 KHz min.
	Accuracy:	+1%
	Input Impdeance:	10 megohms
3. Variable Attenuator	Attenuation:	10dB to 80dB in 5dB steps
	Accuracy:	+0.5dB of setting
	Impedance:	50 ohms
4. Power Supply	Output Voltage:	+25.0 ± 0.1 Vdc
	Load Regulation:	0.01% max.
	Line Regulation:	0.01% max.
	Ripple & Noise:	200uV max.
	Output Current:	50 mA min.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

5.	Oscilloscope	Bandwidth: Deflection Factor: Input Impedance:	1 MHz min. AC 10 mV/div to 1 v/div 1 Megohm shunted by approximately 40 pF.
6.	Digital AC Voltmeter	Frequency Range: Voltage Range: Accuracy: Resolution: Input Impedance:	100 Hz to 20 KHz min. To 1 volt + 0.35% total 10uV 1 megohm
7.	Brass Test Plate	2 ft. by 3 ft., approximate	
8.	Termination	150 ohm, 1/2 W	
9.	Termination	50 ohm, 1/2 W	

5. PACKAGING

5.1 Packaging, packing, and marking. Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 11740262. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use. The doppler amplifier board assembly is used in the Amplifier, Doppler Assembly 11740261 which is used in the Radar Receiver R-1475/VPS-2, part of Radar Set AN/VPS-2. It is a broadband amplifier which provides amplification of low-level doppler signals and supplies them to a phase detector.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Applicable packaging data sheet number (see 5.1).

c. Selection of applicable level of preservation, packaging, and packing.

d. Level of protection required.

e. Applicable stock number.

f. Requirement for first article submission.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

6.3 Submission of designs for approval. Contractor designs shall be approved by the Government prior to fabricating or procuring of the equipment. Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of contract. Submit designs as required to: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAF-I, Dover, NJ 07801.

When the contractor submits inspection equipment designs to the Government for approval, he shall give the following information in his letter of transmittal:

a. The contract number.
b. The contract item (name, model number, etc.).
c. The designs remaining to be submitted and the expected date of transmittal.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, or Picatinny Arsenal drawings. Tehnical data originally prepared by these activities is now under the cognizance of ARRADCOM.

6.5 Distribution of original specification. MIL-A-48608(AR) was for internal US Army Armament Research and Development Command use only and was not forwarded to the Naval Publications and Forms Center for distribution.

6.6 Changes to previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A525)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-A-48608A AMPLIFIER, DOPPLER BOARD ASSEMBLY: 11760262

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

OLD

EPARTMENT OF THE ARMY

OFFICIAL BUSINESS
NALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMMAND
ATTN:: DRDAR-QAF
DOVER, NJ 07801

OLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.