MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 11743281 DISPLAY DRIVER

This specification is approved for use by the US Army Armament Research and Development Command (ARRADCOM) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality l ssurance provision for the Circuit Card Assembly: 11743281 Display Driver which is the A8 component of the Electronic unit, 117431310

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of" invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Government the Manufacture and Inspection of
MIL-I-45607	Inspection Equipment: Acquisition, Maintenance and Disposition of
MIL-STD-45662	Calibration System Requirement

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Envirpnmental Test Methods

FSC 1240

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T01:25Z
Check the source to verify that this is the current version before use.

3.1.1 Function. The assembly shall provide the following functions:

	Designation
a.	Continiuity
b.	Anode outputs
c.	Range display count
d.	Replies display count
e.	Malfunction display count
f.	Lamp test
g.	Blanking test

3.1.2 General specifications. The following provisions of MIL-F-13926 apply: (See 4.5.1)

a. Order of precedence
b. Dimensiom and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a.	Temperature	73° ± 18°F
b.	Relative humidity	50 percent ±30 percent
c.	Atmospheric pressure	28.5 ±2.0 -3.0 in. Hg.

3.2 First article. when specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4 and 6.2).

3.3 Performance. Unless otherwise specified, the assembly shall meet the perfomance requirements specified herein under standard ambient conditions of 3.1.3.

3.3.1 Continuity. - With no power or signals applied direct continuity resistance not greater than 2.0 ohms, shall exist between pins P1-16 and P1-36. (See 4.6.2.1)

3.3.2 Anode outputs. - With no signals applied, output signals shall be present at pins as shown in figure 1. (See 4.6.2.2)

3.3.3 Range display count. With the logical one digital type-A signal, from 3.1 of table I, present at pins P1-13A, -28A, -29A, -30A and -32A and with the signal input conditions of table II establish in any item order, the output data waveforms of figures 2, 3 and 4 shall appear at pins specified in table II. (See 4.6.2.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE I. Loads, power and signals.

Item	Conditions	Characteristics	Connections
1.0	Loads		Connected as follows:
1.1	Resistors	33 ohms ± 5 percent, 2 watts (W)	One each between pin P1-16 and P1 pins 9B, 12B, 13B, 14B, and 17B
1.2	Resistor	200 ohms ± 5 percent, 2 watts	Between pins P1-19 and P1-25A
1.3	Resistor	1.8 kilohms ± 5 percent, 1/4 watt	Between pins P1-15 and P1-34B
1.4	Resistors	1.5 kilohms ± 5 percent, 1/4 watt	One each between pin P1-15 and P1 pins 21B, 22B, 23B, and 24B
2.0	Power sources		Applied, unless otherwise specified, between pins:
2.1	14.0 Vdc	Tolerance: ± 0.5 Vdc Ripple: 25 mV p-p max	P1-19(+), and P1-16(-) and P1-36(-)
2.2	5.0 Vdc	Tolerance: ± 0.2 Vdc Ripple: 25 mV p-p max	P1-15(+), and P1-16(-) and P1-36(-)
3.0	Signals		
3.1	Digital type-A	Logical one: 4.0 ± 1.0 V Source impedance: 2 kilohms ± 5% Logical zero: 0.2 ± 0.2 V	Applied as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

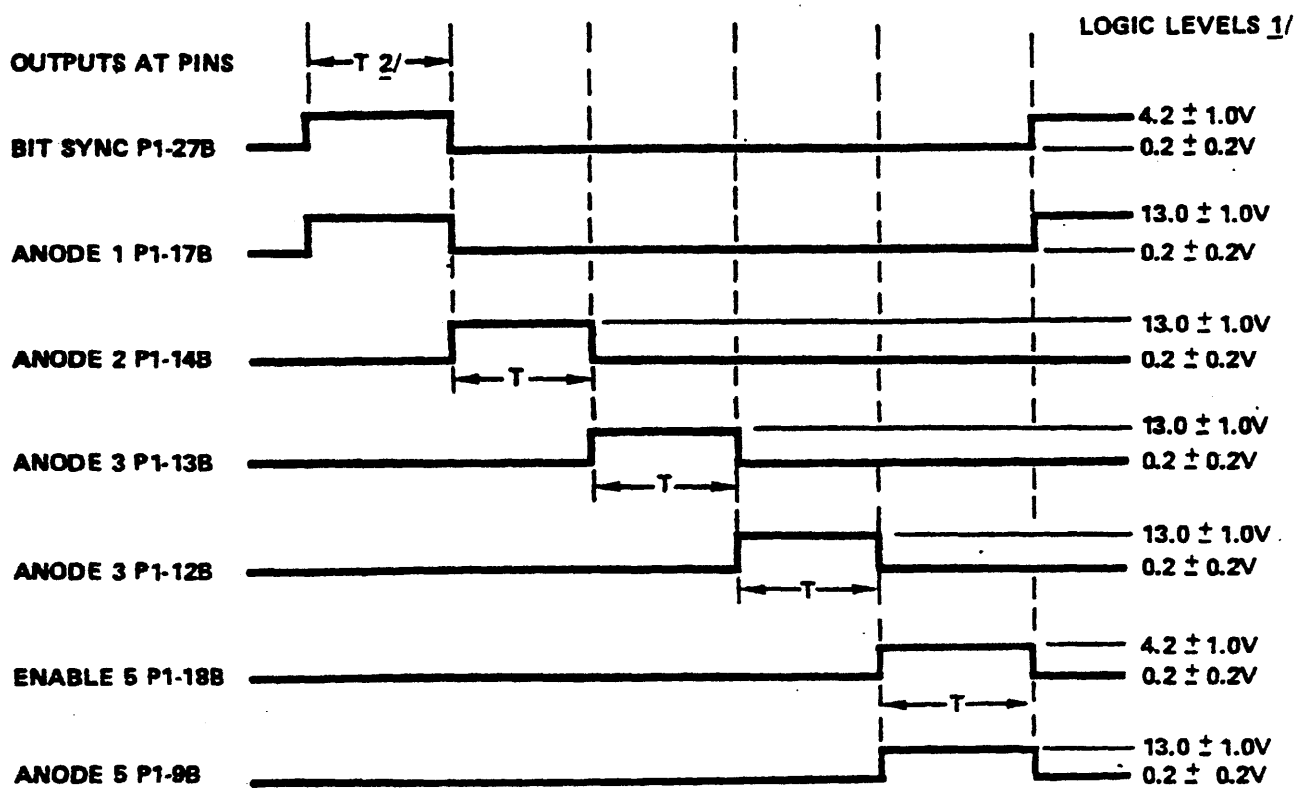


FIGURE 1. Anode output waveforms.

1/ Voltages referenced to pin P1-16 (RTN).
2/ T = 3.2 ± 0.9 milliseconds (msec).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Range display count outputs.

Item Range	Input Condtions 1/, 2/ at Pins									
	P1-11	P1-2A	P1-3B	P1-4A	P1-5B	P1-6A	P1-7B	P1-8A	P1-9A	P1-10A
1.0 1000s	1	1	1	1	1	1	1	1	1	1
1.1	1	1	1	0	1	1	1	1	1	1
1.2	1	1	1	1	1	1	1	1	1	1
1.3	1	1	0	1	1	1	1	1	1	1
1.4	1	0	1	1	1	1	1	1	1	1
1.5	0	1	1	1	1	1	1	1	1	1
2.0 100s										
2.1	1	1	1	1	1	1	1	1	1	1
2.2	1	1	1	1	1	1	1	0	1	1
2.3	1	1	1	1	1	1	0	1	1	1
2.4	1	1	1	1	1	0	1	1	1	1

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Range sisplay count outputs. - Continued

Item Range	Input Condtions 1/, 2/ at Pins									
	P1-1A	P1-2A	P1-3B	P1-4A	P1-5B	P1-6A	P1-7B	P1-8A	P1-9A	P1-10A
2.5	1	1	1	1	0	1	1	1	1	1
3.0 10s										
3.1	1	1	1	1	1	1	1	1	1	1
3.2	1	1	1	1	1	1	1	1	1	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Range display count outputs. - Continued

Input Condtions 1/, 2/ at Pins						Output Conditions 1/, 3/ at Pins			
-11B	P1-12A	P1-14A	P1-17A	P1-18A	P1-20A	P1-21B	P1-22B	P1-23B	P1-24B
1	1	0	0	0	0	0	0	0	0
1	1	0	0	0	0	Fig. 2	0	0	0
1	1	0	0	0	0	0	Fig. 2	0	0
1	1	0	0	0	0	0	0	Fig. 2	0
1	1	0	0	0	0	0	0	0	Fig. 2
1	1	0	0	0	0	0	0	0	0
1	1	0	0	0	0	Fig. 3	0	0	0
1	1	0	0	0	0	0	Fig. 3	0	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Range display count outputs. - Continued

Item Range	Input Condtions 1/, 2/ at Pins						Output Conditions 1/, 3/ at Pins			
	P1-11B	P1-12A	P1-14A	P1-17A	P1-18A	P1-20A	P1-21B	P1-22B	P1-23B	P1-24B
2.4	1	1	0	0	0	0	0	0	Fig. 3	0
2.5	1	1	0	0	0	0	0	0	0	Fig. 3
3.0 10s										
3.1	1	1	0	0	0	0	0	0	0	0
3.2	1	0	0	0	0	0	Fig. 4	0	0	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Range display count outputs. - Continued

Item Range	Input Condtions 1/, 2/ at Pins									
	P1-1A	P1-2A	P1-3B	P1-4A	P1-5B	P1-6A	P1-7B	P1-8A	P1-9A	P1-10A
3.3	1	1	1	1	1	1	1	1	1	1
3.4	1	1	1	1	1	1	1	1	1	0
3.5	1	1	1	1	1	1	1	1	0	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Range'display count Outputs- Continued

Input Condtions 1/, 2/ at Pins							Output Conditions 1/, 3/ at Pins			
Item Range	P1-11B	P1-12A	P1-14A	P1-17A	P1-18A	P1-20A	P1-21B	P1-22B	P1-23B	P1-24B
3.3	0	1	0	0	0	0	0	Fig. 4	0	0
3.4	1	1	0	0	0	0	0	0	Fig. 4	0
3.5	1	1	0	0	0	0	0	0	0	Fig. 4

1/ input and output signal voltages are referenced to pin P1-16 (rtn).

2/ Input signal condition legend: 1 = logical one, digital type - A signal (item 3.1 of table I).
0 = logical zero, digital type - A signal (item 3.1 or table I).

3/ Output condition legend: 0 = 0.2 ±0.2V, logical zero state.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.


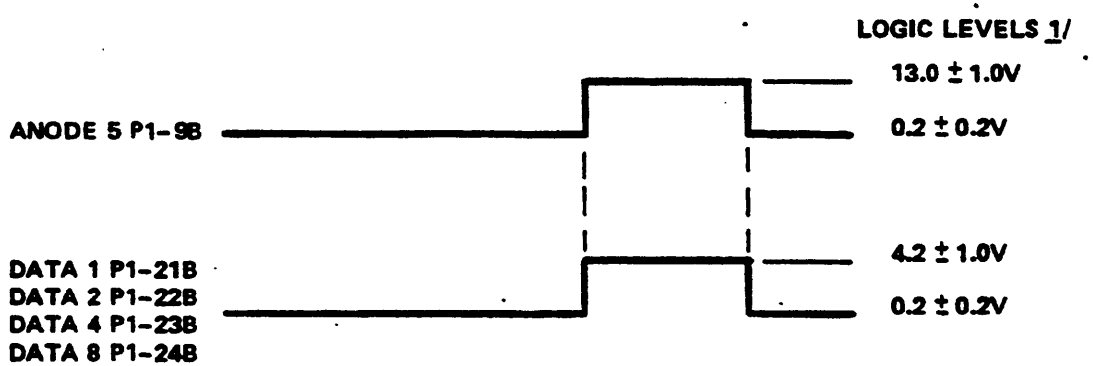


FIGURE 2. Data Output waveform-items 1.2 through 1.5 Of table II.

1/ Voltage referenced to P1-16 (rtn).

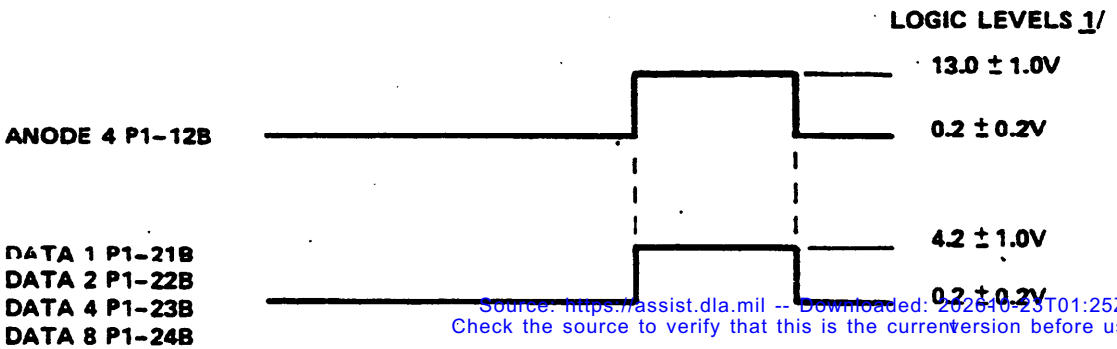

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

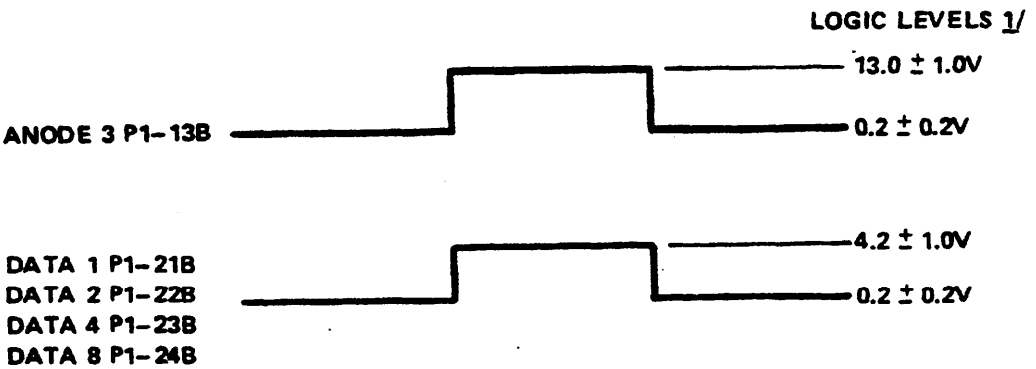


FIGURE 4. Data output waveform - items 3.2 through 3.6 of table II.

1/ Voltage referenced to Pin P1-16 (rtn).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

3.3.4 Replies display count. - With tthe logical one digital type - A signal item 3.1 of table I, present at pins P1-13A, -28A, -29A, -30A and -32A and with the signal input conditions of table III established in any item order, the output replies data waveform of figure 5 shall appear at pins as specified in table III. (See 4.6.2.4)

3.3.5 Malfunction display count. - With the logical one digital type - A signal item 3.1 of table I, present at pins P1-lA, -2A, -3B, -4A, -5B, -6A, -7B, -8A, -9A, -10A, -11B and -12A, with the logical zero digital type-A signal item 3.1 of table I, present at pins P1-14A, -17A, -18A and -20A and with the signal input conditions if table IV established in any item order, the output malfunction data waveform of figure 6 shall appear at pins as specified in table IV. (See 4.6.2.5)

3.3.6 Lamp test. - With the logical one digital type-A signal, item 3.1 of table I, present at pins P1-28A, P1-29A, P1-30A, P1-32A and P1-30B, the output condition at pin P1-25A shall be 1.8 ± 0.3 Vdc. With the logical zero digital type - A signal, item 3.1 of table I, present at pin P1-30B, the output condition at pin P1-25A shall be 14.0 ± 0..5 Vdc. (See 4.6.2.6)

3.3.7 Blanking test. - With the logical digital type-A signal, item 3.1 of table I, present at pins P1-29A, P1-30A, P1-32A and-P1-30B and a logical zero type - A signal present at pin p1-28A and with a RANGE signal applied in accordance with figure 7, the blanking output and MALF LIGHT RET output shall be as specified in figure 7. (See 4.6.2.7)

3.4 Environmental.

3.4.1 Shock. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 40 ± 4 gravity units (g) for a duration of 18 ± 3 milliseconds (msec) applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 100.0 ± 10.0 g for a duration of 1.5 ± 0.2 msec applied in each direction along three mutually perpendicular axes. (See 4.6.3.1)

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 8. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes. (See 4.6.3.2)

3.4.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to +140°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.4.4 Storage temperature. The assembly shall be capable of operating as specifies herein after exposure to storage temperatures ranging from -65°F to +160°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE III. Replies display count outputs.

Item	Input Conditions 1/, 2/ at Pins				Output Conditions 1/, 3/		
	P1-14A	P1-17A	P1-18A	P1-20A	P1-21B	P1-22B	P1-23B
1	0	0	0	1	Figure 5	0	0
2	0	0	1	0	0	Figure 5	0
3	0	1	0	0	0	0	Figure
4	1	0	0	0	0	0	0
5	1	0	0	1	0	0	0

1/ Input and output signal voltages are referenced to pin P1-16 (rtn).

2/ Input signal condition legend:
1 = logical one, digital type-A signal, item 3.1 of table
0 = logical zero, digital type-A signal item 3.1 of table

3/ Output condition legend: 0 = 0.2 ± 0.2V, logical zero state.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

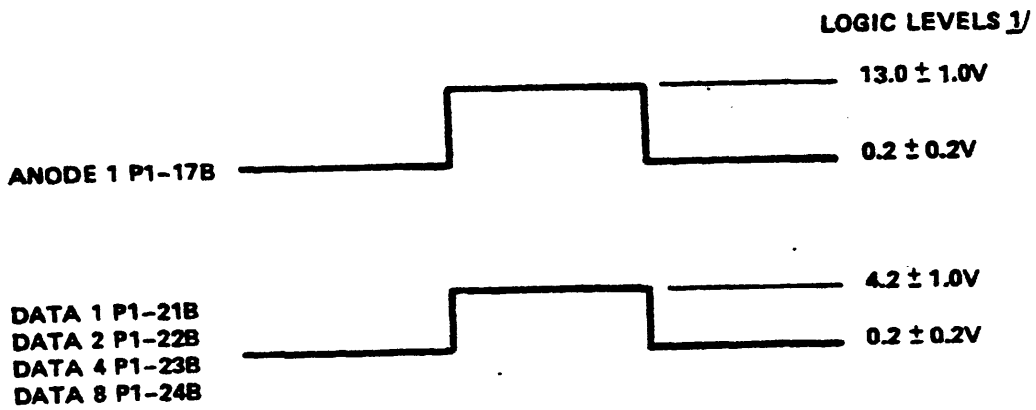


FIGURE 5. Replies data output wavevorm-items 1 through 4 of table III 1.

1/ Voltags referenced to pin P1-16 (rtn).

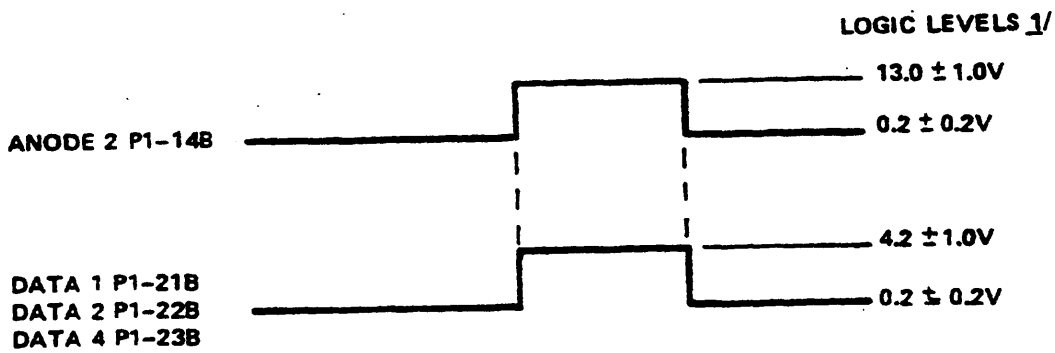


FIGURE 6 Malfunction data output waveform-item 1 through 6 of table IV.

1/ Voltage referenced to P1-16 (rtn).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE IV. Malfunction display count outputs.

Item	Input Conditions 1/, 2/ at Pins					Output Conditions 1/, 3/ at Pins			
	P1-13A	P1-28A	P1-29A	P1-30A	P1-32A	P1-21B	P1-22B	P1-23B	P1-25A
1	1	0	1	1	1	Fig. 6	0	0	1.8±0.8Vdc
2	1	0	0	1	1	0	Fig. 6	0	1.8±0.8Vdc
3	1	1	1	0	1	Fig. 6	Fig. 6	0	1.8±0.8Vdc
4	1	1	1	0	0	0	0	Fig. 6	1.8±0.8Vdc
5	0	1	1	1	1	Fig. 6	0	Fig. 6	14.0±0.5Vdc
6	0	1	1	1	0	0	0	Fig. 6	1.8±0.8Vdc

1/ Input and output signal voltages are referenced to pin P1-16 (rtn).

2/ Input signal condition legend:

1 = logical one, digital type-A signal, item 3.1 of table I.
0 = logical zero, digital type-A signal, item 3.1 of table I.

3/ Output condition legend: 0 = 0.2 ± 0.2V, logical zero state.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

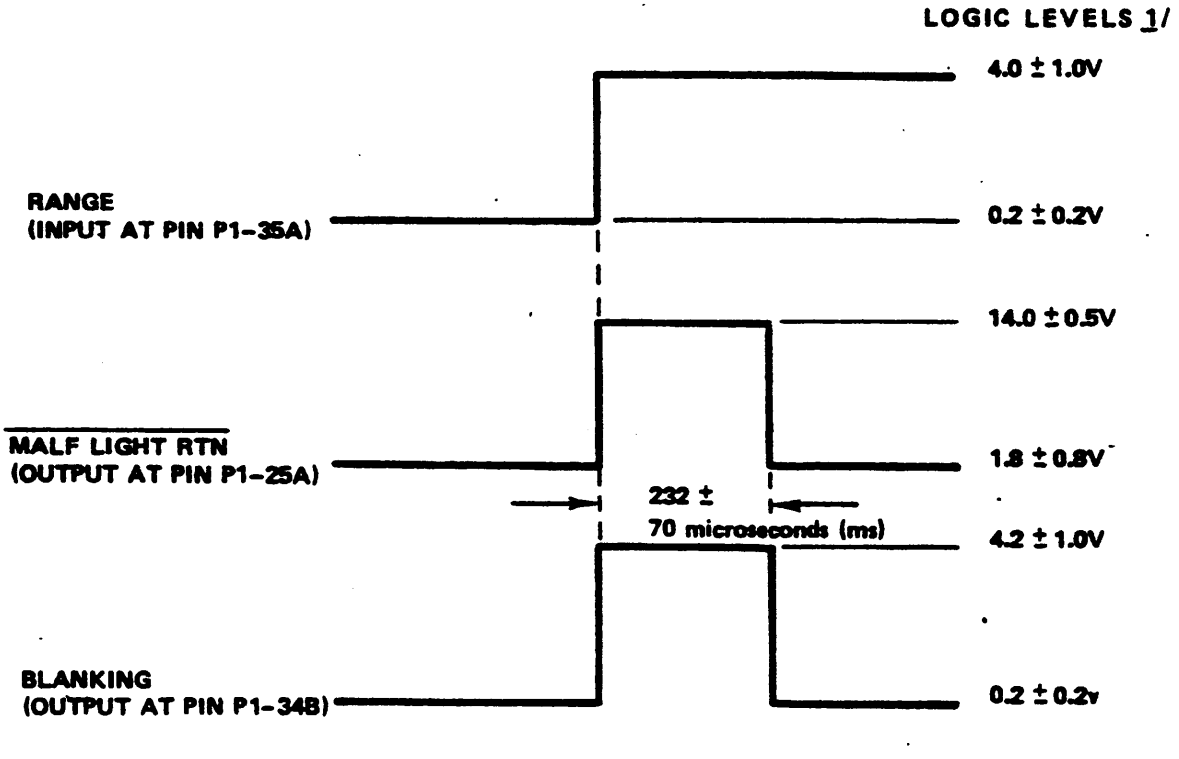


FIGURE 7. Malfunction light return and blanking output waveforms.

1/ Voltages referenced to pin P1-16 (rtn).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

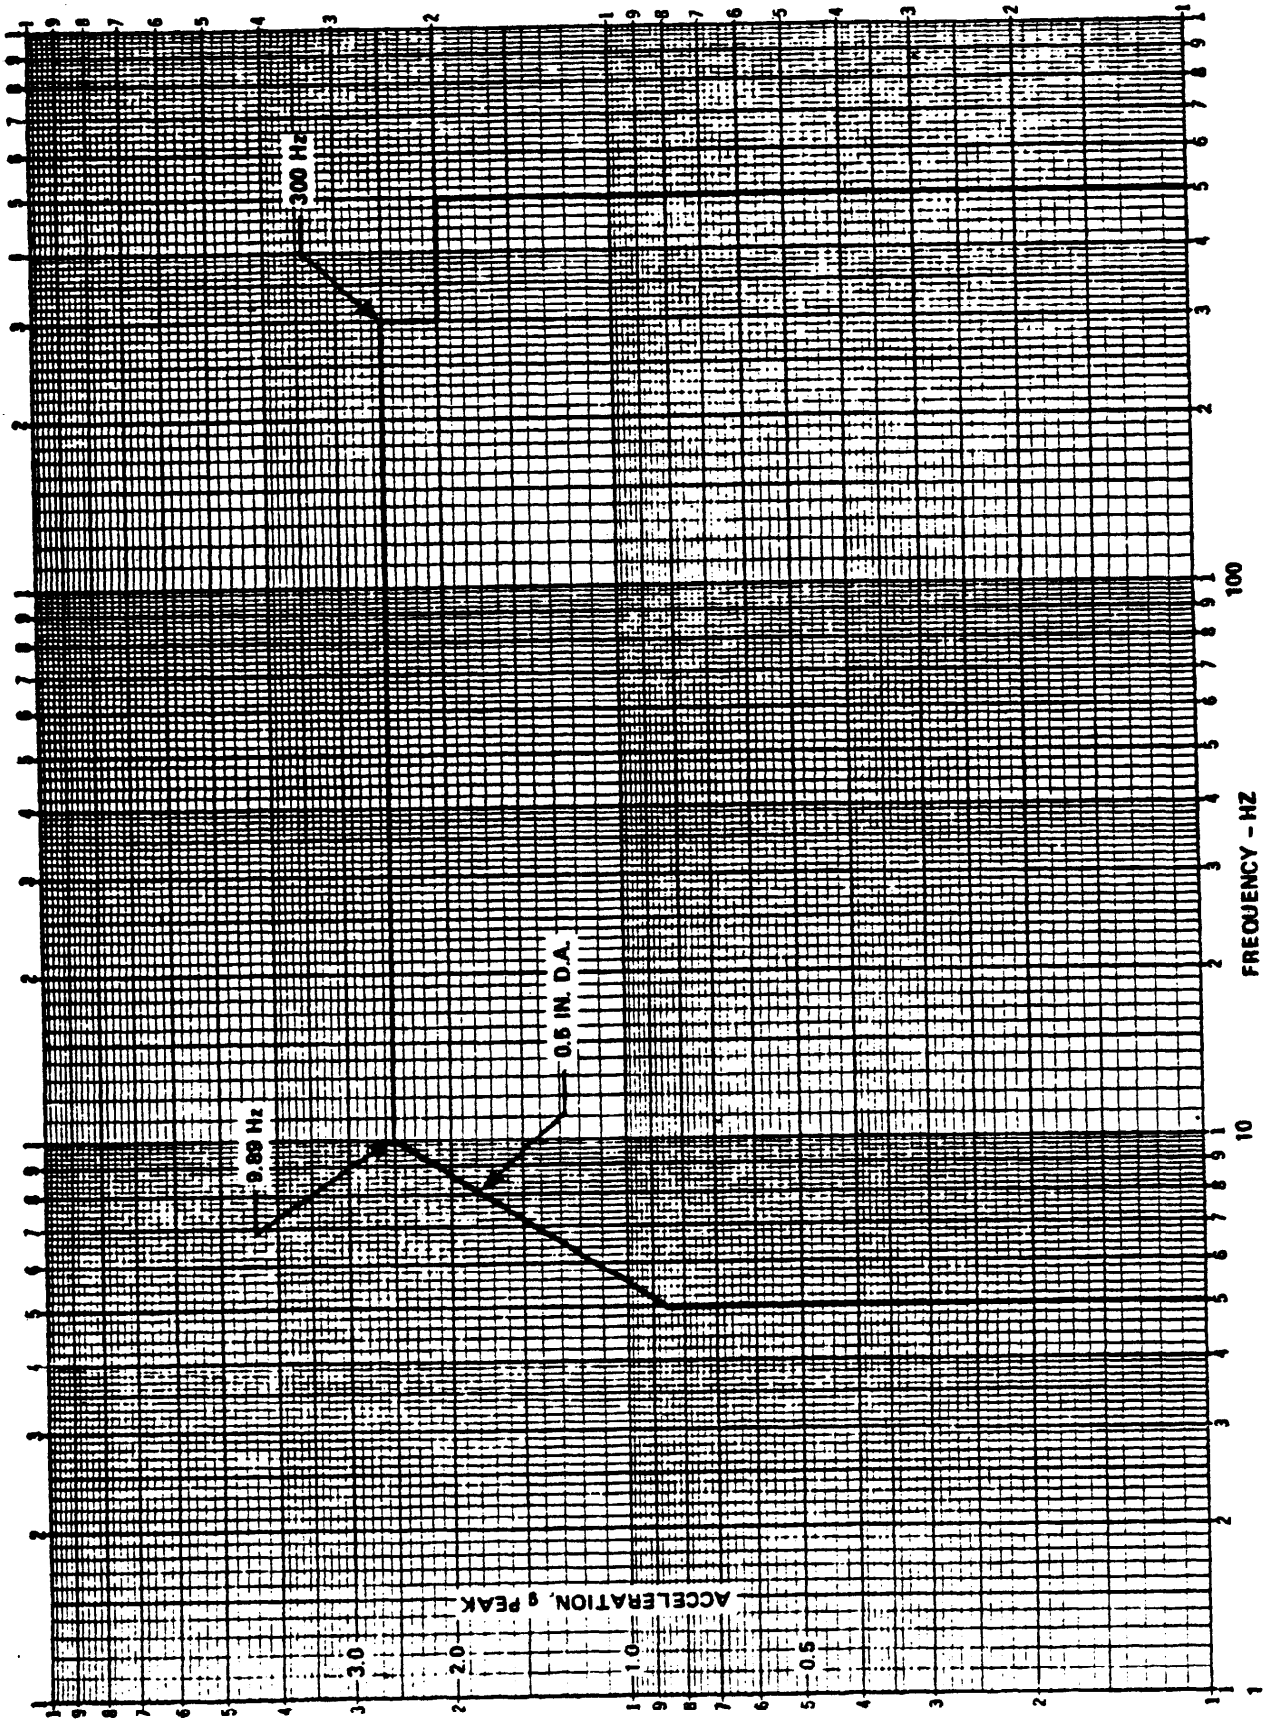


FIGURE 8. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:25Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirents as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor shall be specified in the contract.

4.4.1 Sample. The first article sample shall be three. assemblies selected at- random by the Government representative from the first fifteen production assemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in tables V, VI and VII.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall " submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE V. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	Continuity	3.3.1	4.6.2.1
102	Anode outputs	3.3.2	4.6.2.2
103	Range display count	3.3.3	4.6.2.3
104	Replies display count	3.3.4	4.6.2.4
105	Malfunction display count	3.3.5	4.6.2.5
106	Lamp Test	3.3.6	4.6.2.6
107	Blanking Test	3.3.7	4.6.2.7

TABLE VI. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings-visual
302	General specifications	3.1.2	MIL-F-13926 - Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE VIII. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
303	Shock	3.4.1	4.6.3.1
304	Vibration	3.4.2	4.6.3.2
305	High Temperature	3.4.3 and 3.4.4	4.6.3.3
306	Low Temperature	3.4.3 and 3.4.4	4.6.3.4
307	Temperature cycling	3.4.3 and 3.4.4	4.6.3.5

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

Use	Plan
a. Logistics spare assembly apart from the next higher assembly	A and C
b. Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to all the tests in table VI.

4.5.2.2 Environmental sample and tests. Three assemblies, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in table VI1 shall be applied separately to each assembly in the simple.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordance with the provisions of MIL-STD-105. All the tests in table VI and only the test of item 307 in table VII shall be applied.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with MIL-STD-105.

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table V and shall be examined visually for completeness, improper assembly and evidence of poor workmanship.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless otherwise specified in the contract, the contractor shall suPPlY, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4.5.6 Packaging inspection. The sampling and inspection of the preservation - packaging, packing and container marking shall be in accordance with the provisions of packaging data sheet P11743281.

4.6 Methods of inspection.

4.6.1 Test equipment. Unless the assembly. is procured apart from the next higher assembly, the test equipment in table VIII shall be used where. specified to perform the required test.

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE VIII. Test equipment

Item	Part Number	Nomenclature
1	11750202	Automatic Card and Unit, Test Set
2	11750429	Adapter, Display Driver
3	11821457	Fixture Shock, Vertical and Horizontal Plane
4	11821458	Shock Adapter, Plate Vib Horz-Vert Plane/Shock-Z
5	11821520	Automatic Test Assembly Central Processor Unit
6	11821647	Vibration/Shock Test Fixture-Electronic Unit, AC, FAT
7	11821861	Test Fixture - Auto Card Test Set Electronic Unit, FAT

4.6.2 Performance tests.

4.6.2.1 Continuity. Use items 1, 2, 5 and 7 of table VIII or suitable equipment to determine compliance with 3.3.1.

4.6.2.2 Anode outputs. Use items 1, 2, 5 and 7 of table VIII or suitable equipment to determine compliance with 3.3.2.

4.6.2.3 Range display count. Use items 1, 2, 5 and 7 of table VIII or suitable equipment to determine compliance with 3.3.3.

4.6.2.4 Replies display count. Use items 1, 2, 5 and 7 of table VIII or suitable equipment to determine compliance with 3.3.4.

4.6.2.5 Malfunction display count. Use items 1, 2, 5 and 7 of table VIII or suitable equipment to determine compliance with 3.3.5.

4.6.2.6 Lamp test. Use items 1, 2, 5 and 7 of table VIII or suitable equipment to determine compliance with 3.3.6.

4.6.2.7 Blanking test. Use items 1, 2, 5 and 7 of table VIII or suitable equipment to determine compliance with 3.3.7.

4.6.3 Environmental tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.6.3.1 Shock.

4.6.3.1.1 Basic design. Use items 3, 4 and 6 of table VIII or mount the assapbly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-81O, method 516.2, procedure I, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 40 ±4 g with a time duration of 18 ±3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table V.

4.6.3.1.2 High intensity. Use items 3, 4 and 6 of table VIII or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-81O, method 516.2, procedure IV, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 100.0 ±10.0 g with a time duration of 1.5 ±0.2 msec masured at the 10 percent amplitude points. At the conclusion of this test. subject the assembly to the performance tests of table V.

4.6.3.2 Vibration. Vibration A as specified in 4.6.3.2.1 shall be conducted only for first article inspection. Vibration B as specified in 4.6.3.2.2 shall be conducted only for quality conformance inspection.

4.6.3.2.1 Vibration A. Use items 4 and 6 of table VIII or mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-81O, method 514.2 procedure VIII, except that the test level shall be the vibration curve shown in figure 8 and duration of exposure shall be not less than 80 miniutes per axis. At the conclusion of this test, subject the assembly to the performance tests of table V.

4.6.3.2.2 Vibration B. This test shall be conducted as in 4.6.3.2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.3.3 High temperature. Use item 7 of table VIII or suitable equipment and subject the assembly to the high temperature test specified in MIL-STD-810, method 501.1, procedure I. The highest operating temperature shall be 140°F. The performance tests of table V shall be applied.

4.6.3.4 Low temperature. Use item 7 of table VIII or suitable equipment and subject the assembly to the low temperature test specified in MIL-STD-81O, method 502.1, procedure I. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of table V shall be applied.

4.6.3.5 Temperature cycling. With power and loads of table I applied, subject the assembly to the temperature profile specified in figure 9. At the conclusion of this test, subject the assembly to the performance tests of table V.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T01:25Z
Check the source to verify that this is the current version before use.

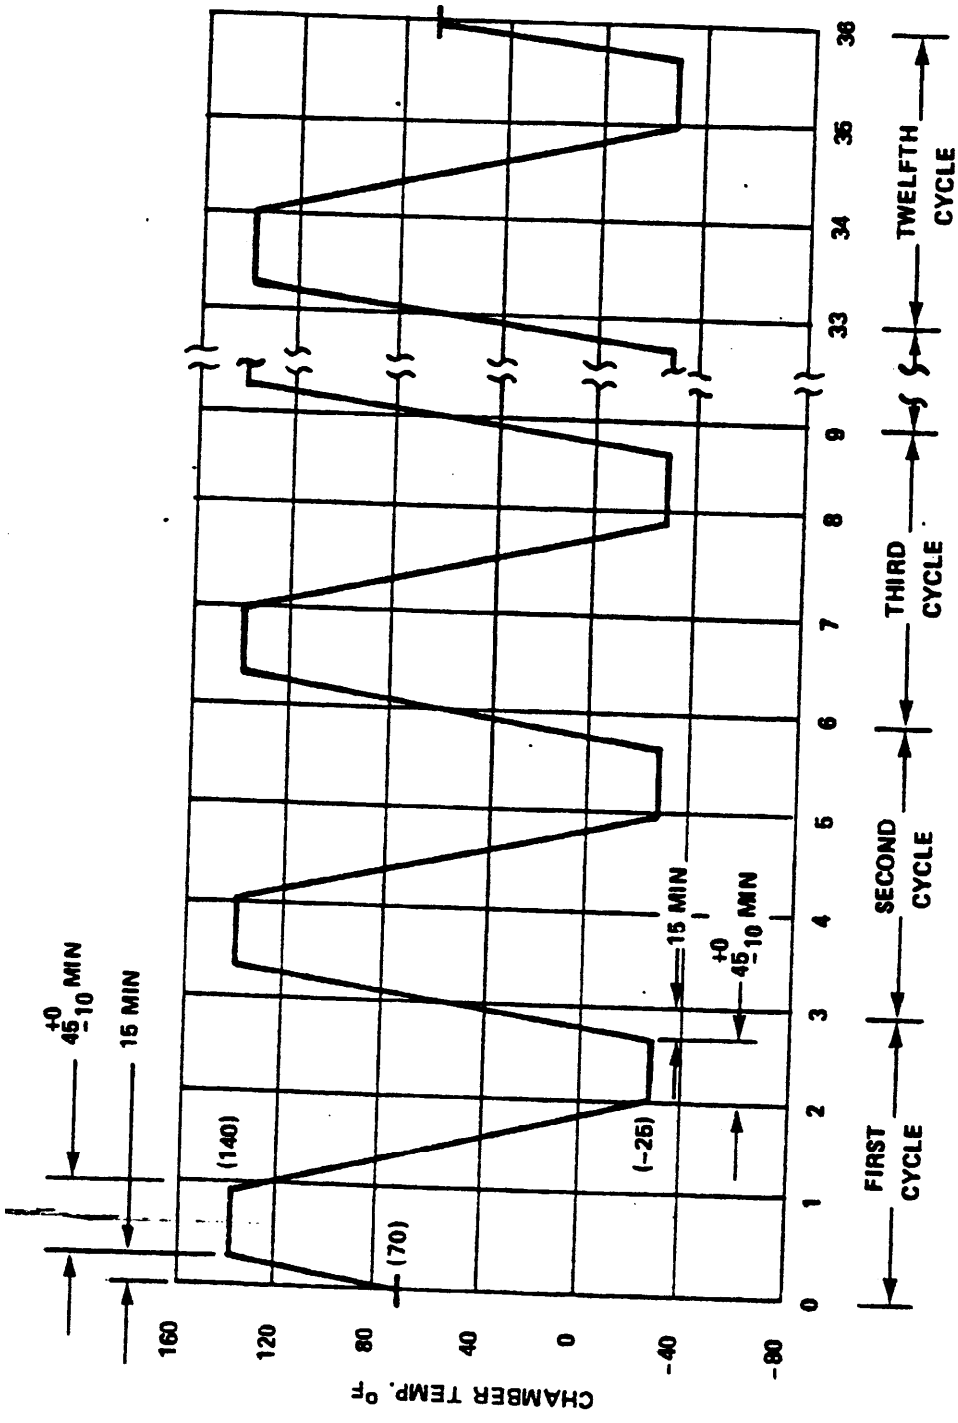


FIGURE 4. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet P11743281. The level of protection shall be as specified in the procurement document. (See 4.5.6)

6. NOTES

6.1 Intended use. The Display Driver Circuit Card Assembly is a functional assembly of the Electronic Unit used in the Laser Fire Control Rangefinder (AN/VVG-2). The assembly provides the following major functions:

a. Signal decoding, commutation and synchronization.

b. Display drive.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Special tests and examination as required, the type of inspection required and the activity responsible for testing and its facility.

c. Applicable packaging data sheet number (see 5.1).

d. Selection of applicable levels of presentation, packaging and packing.

e. Applicable stock number.

f. First article inspection requirements.

6.3 Previous revisions of MIL-C-62204B was for the US Army Armament Research and Development Command's internal use only, and were not forwarded to the Naval Publications and Form Center for publication.

"Custodian:
Army-AR

Preparing Activity:
Army-AR
Project No. 1240-A775

*U.S. GOVERNMENT PRINTING OFFICE: 1982-505-022/1030

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-62204B CIRCUIT CARD ASSEMBLY: 11743281 DISPLAY DRIVER

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
ENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMMAND
ATTN:: DRDAR-QAF
DOVER, NJ 07801

OLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

MIL-C-62204B(AR)
NOTICE 1
30 January 1987

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 11743281 DISPLAY DRIVER

MIL-C-62204B(AR), dated 30 June 1981, has been reviewed and determined to be valid for use in acquisition.

Preparing activity:
Army-AR

AMSC N/A

FSC 1240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

INCH-POUND

MIL-C-62204B(AR)
AMENDMENT 2
30 August1993
SUPERSEDING
AMENDMENT 1
9 NOVEMBER 1987

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 11743281, DISPLAY DRIVER

This amendment forms a part of MIL-C-62204B(AR), dated-30 June 1981, and is approved for use by the U.S. Army Armament, Munitions, and Chemical Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1 Drawings, under Inspection Equipment, Add: "(REF)" following each inspection equipment drawing.

PAGE 14

* 3.3.6: Delete in its entirety and substitute:

"3.3.6 Lamp test. With the logical on digital type-A signal, item 3.1 of table I, present at pins P1-28A, P129A, P1-32A, and P1-30B, the output condition at pin P1-25A shall be 14.0 ± 0.5 V dc. With the logical zero digital type-A signal, item 3.1 of table I, present at pin P1-30B, the output condition at pin P1-25A shall be 1.8 ± 0.8 V dc. (See 4.6.2.6)"

PAGE 18

* Figure 7: Delete "232 ± 70 microseconds (ms)" and substitute "232 ± 70 milliseconds (ins)"

FSC 1240

AMSC N/A

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

PAGE 23

* Delete paragraph 4.6.1 in its entirety and substitute:

"4.6.1 Test equipment. The test equipment in table VIII may be used where specified to perform the required test. If alternate test equipment is to be used, the contractor shall submit inspection equipment designs for review and approval in accordance with the terms of the contract (see 6.4)."

PAGE 27

* Add new paragraph 6.4 as follows:

"6.4 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract."

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army - AR

Preparing Activity:
Army - AR

(Project 1240-A973)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.