MILITARY SPECIFICATION

GLOVES, LEATHER: GAUNTLET; DRUMMERS

1. SCOPE

1.1 Scope. This specification covers requirements for a gauntlet type unlined glove.

1.2 Classification. Gloves shall be of one type in the following sizes, as specified (see 6.2).

Schedule of sizes

7-1/2	9-1/2
8	10
8-1/2	10-1/2
9	11

1.3 Individual order. When the gloves are made for an individual order, this specification shall govern except that the detailed requirements of Section 3, Table I may be modified to the extent necessary for good custom tailoring practices.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-375	- Plastic Film, Flexible, Vinyl Chloride.
V-T-295	- Thread, Nylon.
KK-L-254	- Leather, Sheepskin, Chrome-Tanned.
DDD-L-20	- Labels, For Clothing, Equipage, And Tentage (General Use).

MILITARY

MIL-B-17757	- Boxes, Fiberboard, Corrugated (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, And Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking for Shipment And Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers for specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case, the specification shall govern.

3.2 Preproduction sample approval. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished gloves shall be submitted or made ready for the contracting officer or his authorized representative for inspection. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Material.

3.3.1 Leather. The gloves shall be made from drum or dip dyed sheepskin, conforming to type A, class 2 of KK-L-254 except colorfastness shall be good. Firm boardy, flanky leather, and leather containing defects which may affect the appearance or serviceability of the gloves will not be accepted.

3.3.1.1 Color. The color of the finished leather shall be white matching the standard sample.

3.3.1.2 Thickness. The thickness of the leather in the cut parts for the gloves when measured with the Woburn or similar standard gage shall be 2 to 3 ounce for palms, thumbs, backs, fourchettes and top binding, and 2-1/2 to 3-1/2 ounce for the cuffs.

3.3.2 Cuff lining. The cuff lining shall be made of 0.020 ±0.002-inch thick white vinyl plastic conforming to type I, class 2 of L-P-375.

3.3.3 Thread. Thread for seaming and stitching the gloves shall be white (nylon), conforming to type II, class 1 or 2, sizes A or B, 3-ply; or type III, sizes A or B monocord of V-T-295.

3.3.4 Adhesive. The adhesive for joining the cuff and cuff lining shall be a good commercial grade of rubber cement suitable for the purpose.

3.3.5 Label. Each pair of gloves shall be provided with a label conforming to type I, class 4 of DDD-L-20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

3.4 Design. The gloves shall be the U.S. Marine Corps design shown on Figure 1. The gloves shall be outseamed, unlined, with two-piece gauntlet cuff lined with vinyl plastic and bound at top edge with the glove leather, three rows of ornamental stitching on the back, Boulton style thumb, and one-or-two-piece fourchettes.

3.5 Patterns. Patterns shall be furnished by the supplier.

3.6 Construction.

3.6.1 Manufacturing requirement. The gloves shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the gloves.

3.6.1.2 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more stitch or seam types are specified in the same operation, any one of them may be used. The number of stitches per inch, as specified in Table 1, indicates the minimum and maximum number permitted.

3.6.1.2.1 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch when not caught in other seams or stitchings shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

3.6.1.3 Shade marking. The component parts shall be marked to insure uniform shade and size throughout the glove. Any method of shade marking may be used except:

(1) Metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive-type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.
(4) Any marking medium which would tend to leave a permanent mark.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OP'N NO	OPERATION	STITCH TYPE	SEAM OR STITCH'G TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Cutting.					
	a. Cut component parts of the glove by the pattern cut method.					
	or					
	b. Cut component parts by the methods of pre-measuring and adjusting the skins.					
	c. Cut the palms and backs of the gloves from one piece of the leather, except the thumbs may be cut from ends. When cut from ends, the thumb shall harmonize with the shade, thickness and texture of the palms and backs. The leather shall be stretched sufficiently during the cutting so that the gloves will not run in the length or in the fingers.					
	d. Cut the cuff pieces for each pair of gloves to match for color, texture and thick ness.					
	e. Cut the binding 5/8 inch wide in not more than two pieces for each glove.					
	f. The use of drill holes and the block or clicker cut method is prohibited.					
2.	Replacement of damaged parts.					
	a. Replace, at time of cutting, all parts containing damages, such as holes or serious weakening defects.					
	b. Replace any parts damaged during the manu-facturing process, by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends or burns.					
3.	Shade marking.					
	a. Mark or ticket (see 3.6.1.3) all parts in order to insure a uniform shade, similar grain pattern, size, and proper assembly throughout the gloves.					
4.	Make fourchettes. (Two piece)					
	Finished appearance. Fourchettes shall be seamed without pleats or puckers or other distortions.					
	a. Seam fourchettes at base with a 1/8-inch seam.	301	SSa-1	12-16	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OP'N NO	OPERATION	STITCH TYPE	SEAM OR STITCHG TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
5.	Ornamental stitch back.					
	Finished appearance. The stitching shall be raised, uniform, and shall converge toward the top of the glove as shown in Figure 1.					
	a. Stitch three rows of double needle ornamental welt stitching on the back of each glove, with the rows commencing 3/8 to 1/2 inch below the base of the fingers and converging toward the top of the glove.	302	OSc-1	10-12	B	B
	b. Draw the ends of the threads to the inside of the glove and tie.					
6.	Assemble cuffs.					
	Finished appearance. Cuff lining shall be securely adhered to cuff without blisters, pleats or puckers. The stitching shall be secure and uniform without distortion. The fronts shall overlap the backs.					
	a. Securely cement cuff lining to cuff pieces.					
	b. Join lined cuff pieces together at the front (thumb) edge with a double row of stitches 1/16-to 3/32-inch gaga with the outer seam 1/16 to 3/32 inch from the raw edges.	301	LSa-2	6-10	B	B
7.	Assemble glove.					
	Finished appearance. All seams shall be made without puckers, pleats or other distortions. Ends of the cuff binding shall overlap not less than 1/2 inch.					
	a. Join fourchettes to back with a 1/16-to 3/32-inch seam.	301	LSa-1	10-14	B	B
	b. Outseam thumb to glove with a 1/16-to 3/32-inch seam.	301	SSa-1	10-14	B	B
	c. Seam lower edge of cuff to top edge of gloves with a double row of stitches 1/16-to 3/32-inch gage , 1/16 to 3/32 inch from the raw edges. Cuff shall be lapped over the glove.	301	LSa-2	6-10	B	B
	d. Close the thumb; and close side seam and finger seams,from top of cuff to and including index finger with a 1/16-to 3/32-inch seam.	301	SSa-1	10-14	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO	OPERATION	STITCH TYPE	SEAM OR STITCHG TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
7.	Assemble glove. (cont'd)					
	e. Seam binding to outside of cuff top edge.	301	BSf-2 (a)	10-14	B	B
	f. Turn binding to the inside of cuff and seam to cuff 1/16 to 3/32 inch from raw edge, securely catching the edge of the label in the stitching.	301	BSf-2 (b)	10-14	B	B
8.	Clean gloves.					
	a. Trim all ends of stitchings and remove all loose threads from the gloves.					
	b. Remove all spots, shade tickets, markers, and stains from the gloves without injury to the material.					
9.	Pair gloves.					
	a. Match the gloves, pair and tack together immediately below the top binding at the back seam of the cuff using a suitable cotton cord.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. Finished measurements for size 9 gloves shall be as shown in Table II when measured as shown in Figure 1. Finished measurements for other sizes shall be graded proportionately in accordance with manufacturer's commercial practice.

Table II. Finished measurements (size 9)

Measurements (see Figure 1.)	Inches	Tolerance, plus or minus
A- Top edge of cuff to tip of second finger	14-1/4	1/2
B- Bottom edge of cuff to tip of second finger	8-1/2	1/4
C- Across palm at thumb crotch, edge to edge	4-1/8	1/8
D- Tip of index finger to thumb crotch	4-3/4	1/8
E- Thumb crotch to tip of thumb	2-3/4	1/8
F- Across bottom edge of cuff	4-3/4	1/4
G- Across top edge of cuff	7-3/4	1/4

3.8 Workmanship. The finished gloves shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection. Inspection shall be in accordance with the provisions of MIL-STD-105, except where otherwise indicated herein. In addition to sampling inspection as set forth in MIL-STD-105, process inspection will be performed during manufacture of the gloves, to determine compliance with all required operations and processes which cannot be determined in the completely fabricated gloves. Any deviation found in process inspection may be cause for rejection of the end item or items.

4.2.1 Preproduction sample inspection. When required, preproduction inspection and testing shall be performed on a completely fabricated pair of gloves for conformance to all provisions of this specification.

4.2.2 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.2.3 Inspection of the end item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

4.2.3.1 Examination of the end item. The defects found during examination of the end product shall be classified in accordance with 4.2.3.1.1 and 4.2.3.1.2. The applicable inspection levels and AQLs shall be as indicated in 4.2.3.1.3. The sample unit for this examination shall be one glove. Selection of the sample shall be by pairs. The sample unit for pairing defects shall be one pair. Defects for pairing shall be classified as a single defect. The lot size shall be expressed in terms of one glove each.

4.2.3.1.1 Visual examination of gloves. The gloves shall be examined for defects in pairing, color, design, construction, material, workmanship and marking as indicated below.

Examine	Defect	Classification Major	Minor
General	a. Any hole other than needle hole, scissors or knife cut, tear, mend or burn.	X	
	b. Any weakening defect such as a needle hole, needle chew, or abraded area.	1/	
	c. Color of any component not as specified, not uniform or any outer-side part shaded.	1/	
	d. Thread ends not trimmed or loose thread ends not removed throughout the glove.		X
	e. Any spot or stain.	1/	
	f. Leather hardened by any process of manufacturing.	X	
Leather	a. Fat wrinkles, loose, spongy, boardy or flanky leather.	1/	
	b. Any broken or grain cut, slaughter cut, open scar or scratch, brittle or bony area, or thin spot.	X	
	c. Any healed scar or brand, open tick mark or fly bite, or excessive large hair cells.	1/	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Components and assembly	a. Any defective component or defect of assembly not herein classified.	1/	
	b. Any component part or required operation omitted or any operation improperly performed not herein classified.	1/	
	c. Lining not properly cemented to gauntlet cuff.	1/	
	d. Glove not neatly laid off.		X
Seams and stitching	a. Accuracy of seaming		
	(1) Any seam or attachment of any component twisted, puckered, pleated or caught in an unrelated operation or stitching.	X	
	(2) Seam allowance not as specified.	1/	
	b. Gage of stitching		
	Any stitching irregular or unevenly gaged (to be scored when the condition exists on the major portion of the seam).	1/	
	c. Any open seam. 2/	X	
	d. Not specified seam or stitch type.	X	
	e. Stitch tension 3/		
	Loose tension, resulting in a loose seam or tight tension resulting in breaking of stitches, when normal pull is applied.	X	
	f. Stitches per inch 4/		
	Stitches more or less than specified:		
	(a) Two stitches.		X
	(b) More than two stitches.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Pairing	a. Not right and left of same size or wide variation in appearance.	X	
	b. Not tacked or joined together as specified.		X
Label	a. Missing or size incorrect incomplete or illegible.	X	
	b. Other than size information incorrect, incomplete or illegible.		X
	c. Improperly located.		X

1/ The defect shall be considered major when it seriously affects the serviceability or appearance, otherwise, it is to be classified as a minor defect.

2/ When one or more stitches are broken, or two or more consecutive skipped stitches or runoffs occur on a single-stitched seam, or on both rows of stitching on a double-stitched seam, it shall be classified a major defect. When one or more stitches are broken or two or more consecutive skipped stitches or runoffs occur on only one row of a double-stitched seam, it shall be classified as a minor defect.

3/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident, other than the gathering of the material, the seam shall be tested by exerting normal pull in the lengthwise direction of the seam or stitching. Gathering of the material shall be recorded as a puckered seam.

4/ Stitches per inch defect is to be classified only when the condition exists on the major portion of the seam.

4.2.3.1.2 Dimensional examination. The gloves shall be examined for dimensional defects including thickness of leather. Size 9 gloves shall be measured according to Table II. Other sizes shall be measured in accordance with the contractor furnished size schedule, using the applicable tolerances of Table II.

4.2.3.1.3 Inspection levels and AQLs. The inspection levels and AQLs, expressed in defects per hundred units, shall be as follows:

Examination	Inspection Level	AQL	
		Major	Total
Para 4.2.3.1.1	II	2.5	6.5
Para 4.2.3.1.2	S-3	---	4.0
Para 4.2.4	S-2	---	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of Section 5 are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as: Incomplete closure of container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Content	Number of pairs of gloves per container is more or less than required.

4.3 Tests. The method of testing specified in applicable specification and as listed in Table III, shall be followed.

Table III - Test Methods

Components	Characteristics	Req. para.	Test method	Req. appl. to S/U	Det per S/unit	Results reported as:
Adhesive	Material identification	3.3.4	Std. comml	X	1	Pass or fail

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each pair of gloves shall be folded in half and placed in an individual polyethylene bag measuring approximately 10-1/2 inches wide by 12-1/2 inches long with one inch lip at the open end along the 10-1/2 inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. Prior to or during final sealing operations, excess air within the bag shall be expelled. Each bag shall contain a label (see 5.3).

5.1.2 Level C. The gloves shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Fourteen (14) pairs of gloves of one size only packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner conforming to class-weather resistant, size No. 1A of MIL-B-17757 and assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.1).

5.2.1.2 Method 2. When specified, 12 level B shipping containers, 168 pairs of gloves of one size only, shall be packed in a fiberboard shipping container conforming to class-weather resistant, size No. 4 of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.1).

5.2.2 Level B. Fourteen (14) pairs of gloves of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to class-domestic, size No. 1A of MIL-B-17757, assembled and closed as specified in the appendix thereto. The fiberboard used in fabricating the box shall be grade 275. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.1).

5.2.3 Level C. Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification:

Nomenclature
Size_____ Stock Number_____
Contract number
Name of contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

5.3.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side directly under the printing or stenciling a white paper label with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The gloves are intended for wear by drummers of the Marine Corps.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size required (1.2)
(c) When preproduction sample is not required (3.2).
(d) Selection of applicable levels of packaging and packing (5.1 and 5.2).

6.3 Sample and shade samples. For information regarding the availability of a sample of the gloves and of the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Supersession data. This specification supersedes Marine Corps Purchase Description No. PD-83 (MCSA) for Gloves, Leather: Gauntlet; Drummer's, dated 7 September 1960.

Preparing activity:
Navy - MC

Project No. 8440-N005

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

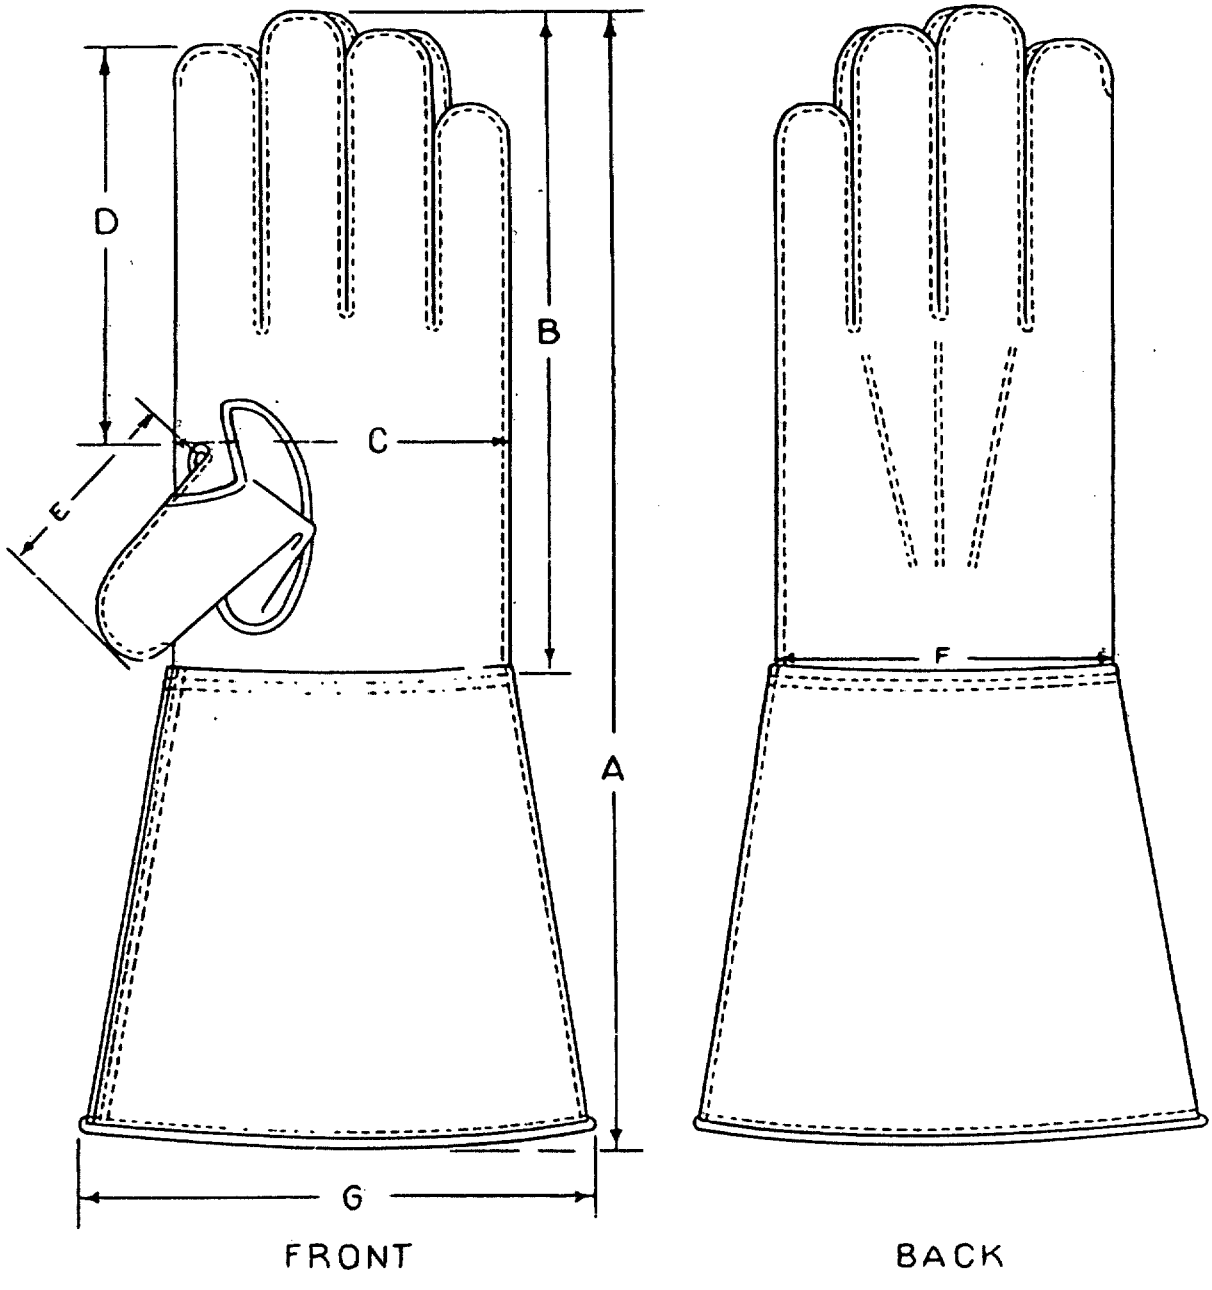


FIGURE 1. GLOVES, LEATHER: GAUNTLET; DRUMMER'S

M.C.S.A.
826:R.G.F
11 Oct '67

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:50Z
Check the source to verify that this is the current version before use.