MILITARY SPECIFICATION

HOOD, RAIN, WOMAN'S: NYLON, RUBBER COATED, GREEN

1. SCOPE

1.1 This specification covers one type and size rain hood for raincoat woman's.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button Staple (Plastic)
V-T-276	-	Thread, Cotton
V-T-280	-	Thread, Cotton Gimp, Buttonhole
UU-P-268	-	Paper, Kraft, Untreated, Wrapping
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered
CCC-T-191	-	Textile Test Methods
DDD-L-20	-	Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-B-17757	-	Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-C-22916	-	Cloth, Coated, Nylon, Copolymer of Butadiene and Acrylonitrile (Rubber)

STANDARDS

FEDERAL

FED. STD. NO. 175	-	Adhesives: Method of Testing
FED. STD. NO. 751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables For Inspection By Attributes
MIL-STD-129	-	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 Preproduction sample approval. Unless otherwise specified (see 6.2) before production is commenced, a sample of the finished hood shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Coated fabric. The coated fabric shall be cloth, coated nylon, Marine Corps green 2200 (see 6.3), conforming to MIL-C-22916.

3.3.1.1 Care and storage of coated fabric. The coated fabric shall be stored in a safe, dry, clean place on platforms or shelves at least six inches off the floor and covered to protect the fabric. Rolls of fabric shall never be placed upright on end. The cloth shall be sorted into similar widths and lengths for cutting. Work in process shall not be piled on the floor, but shall be placed on work benches, tables, or pallets.

3.3.2 Cloth, cotton, duck. The material for reinforcing the visor shall be cloth, cotton, duck conforming to type I, No. 8 hard texture, of CCC-C-419, except requirement for air permeability is not applicable.

3.3.3 Cotton thread. The cotton thread shall conform to V-T-276, type IC2, mercerized finish, ticket No. 0, 3-ply for seaming and stitching, type IB3, glazed finish, ticket No. 30, 4-ply for sewing on buttons and type IC2, mercerized finish, ticket No. A, 3-ply for making buttonholes. The thread shall be dyed shade E, cable No. 66034, and shall show good colorfastness to laundering and light when tested as specified in the thread specification.

3.3.4 Gimp. Buttonhole gimp shall be cotton, No. 8, soft or glazed finish, conforming to type I or type II of V-T-280, showing good colorfastness to laundering. The color shall approximate shade E, cable No. 66034.

3.3.5 Buttons. The sewing hole buttons shall be melamine formaldehyde composition, glossy finish, style 20 or 21, 30-line, conforming to type II, class D of V-B-871. The color of the buttons shall approximate shade green, cable No. 62017.

Source: https://assist2la.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

3.3.6 Labels. Each hood shall have an identification label conforming to type IV, class 1 of DDD-L-20. Colorfastness for laundering shall apply. The label shall contain the following information:

Nomenclature (item description)
Contract number
Stock number

3.4 Design. The hood shall be the Marine Corps design shown on the attached figure.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide 1/4 inch allowance for all seams. These patterns show seam allowance, directional lines for cutting, and are marked or notched for proper placement and assembly of component parts.

3.5.1 List of pattern parts. Hoods shall be cut from the specified materials in accordance with the pattern parts indicated:

Material	Pattern nomenclature	No. of cut parts
Cloth, coated nylon	Hood	2
	Hood lining	2
	Capulette	1
	Capulette lining	1
Cloth, cotton, duck	Visor (pieces)	2

3.6 Construction.

3.6.1 Manufacturing requirements. The hoods shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the hoods.

3.6.1.2 Stitches, seams, and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED. STD. NO. 751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Thread breaks and ends of seams. Ends of all seams and stitching (stitch type 301), except ends of a continuous line of stitching, when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks shall be secured back of the break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OP'N NO	OPERATION	STITCH TYPE	SEAM OR STITCH TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Cutting.					
	a. The coated-nylon cloth shall be carefully laid in uniform widths and lengths and care must be taken in the spreading of the material so that the plies are not stretched or full and that one side of the lay is even. The use of holding devices (such as staples) on the paper patterns is prohibited on the basic fabric.					
	b. Cut hood in strict accordance with patterns furnished by the Government.					
	c. Cut basic material in accordance with the directional lines on patterns. The basic fabric shall be cut with the uncoated side of the material to finish on the outside of the hood.					
	d. Cut duck material in accordance with the directional lines on patterns.					
2.	Replacement of damaged parts.					
	a. Replace at time of cutting all parts containing holes or other basic fabric defects such as smashes, slubs or multiple floats.					
	b. Discard and replace prior to joining to the finished hood all component parts which are damaged by needle chews, scissor or knife cuts; tears or holes.					
3.	Shade marking.					
	a. Mark all component parts cut from one piece of basic material.					
	b. The use of shade tickets with metal fastening devices or sewn on shade tickets is prohibited for shade marking the coated-nylon fabric. The use of shade tickets with a thermo-activated adhesive is also prohibited for shade marking the coated-nylon fabric.					
	c. The use of a numbering machine, wax or graphite pencil is allowed provided that the marking does not show on the outside of the hood and wherever possible is covered by the seam allowance. The use of indelible, ball point, or penetrating inks is prohibited.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

OP'N NO	OPERATION	STITCH TYPE	SEAM OR STITCH'G TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
4.	Make hood.					
	Finished appearance. The hood shall be uniformly stitched and shall finish smooth and flat without twists, gathers, puckers, pleats or raw edges. The extension piece and seamed edges shall be well worked out. The darts shall be tapered at the upper end and shall finish without gathers, puckers, or pleats.					
	a. Position the back center panel of hood face to face and join together with 1/4 inch seam.	301	LSq-2 (a)	10-14	0	0
	b. Turn back the center panel at the seam and stitch 1/16 inch from the raised edge. The raised stitching shall be toward the right side of the center seam when the hood is worn.	301	LSq-2 (b)	10-14	0	0
	c. Position hood darts face to face and join together with 1/4 inch seam, tapering upper end of darts to a point.	301	LSq-2 (a)	10-14	0	0
	d. Turn back the darts at the seam and stitch 1/16 inch from the raised edge. The pointed end shall be securely tacked or backstitched. The raised stitch shall be towards the front of the seam when the hood is worn.	301	LSq-2 (b)	10-14	0	0
5.	Make hood lining.					
	Finished appearance. The hood lining shall be uniformly stitched and shall finish smooth and flat without twists, gathers, puckers, pleats or raw edges. The extension piece and seamed edges shall be well worked out. The darts shall be tapered at the upper end and shall finish without gathers, puckers, or pleats.					
	a. Position the back center panel of lining face to face and join together with 1/4 inch seam.	301	LSq-2 (a)	10-14	0	0
	b. Turn back the center panel at the seam and stitch 1/16 inch from the raised edge. The raised stitching shall be toward the left of the center lining seam when the hood is worn.	301	LSq-2 (b)	10-14	0	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OP'N NO	OPERATION	STITCH TYPE	SEAM OR STITCH'G TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
5.	Make hood lining. (cont'd)					
	c. Position hood lining darts face to face and join together with 1/4 inch seam, tapering upper end of darts to a point.	301	LSq-2 (a)	10-14	0	0
	d. Turn back the darts at the seam and stitch 1/16 inch from the raised edge. The pointed end shall be securely tacked or backstitched. The raised stitch shall be towards the center back seam when the hood is worn.	301	LSq-2 (b)	10-14	0	0
6.	Assemble hood.					
	Finished appearance. The hood and hood lining shall be uniformly stitched, carefully joined and shall finish smooth and flat without twists, gathers, puckers, pleats or raw edges. The visor shall be reinforced with two plies of cotton duck material.					
	a. Position the plies of visor reinforcing material on the coated side of hood lining at the visor end of hood lining (see Figure 1). The curved edge of visor reinforcing material shall be placed 1/4 to 5/16 inch in from raw edge of visor and the center of the reinforcing material placed on the center top seam of lining.					
	b. Seam the visor reinforcing material to the hood lining 1/8 inch from each edge.	301	SSaa-1 (each edge)	10-14	0	0
	c. Position the hood and lining face to face with all edges even including the extension piece and join together with 1/4 inch seam leaving neck edge unstitched. The visor reinforcement shall not be caught in the stitching.	301	SSe-2 (a)	10-14	0	0
	d. Turn hood, completely working out the seamed edges. Edge stitch the front and the extension piece from notch to notch 1/8 inch from seamed edge. Continue to stitch at the neck edge of the hood 1/8 to 3/16 inch from raw edge.	301	SSe-2 (b) SSa-1 (raw neck edge)	10-14	0	0
7.	Make capulette.					
	Finished appearance. The capulette and lining shall be uniformly stitched and shall finish smooth and flat without twists, gathers, puckers, pleats or raw edges. The seamed edges shall be well worked out.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

OP'N NO	OPERATION	STITCH TYPE	SEAM OR STITCH'G TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
7.	Make capulette. (cont'd)					
	a. Position the capulette lining to capulette face to face with all edges even and notches matching.					
	b. Seam capulette lining to capulette around the edges from notch to notch with 1/4 inch seam, leaving the neck edge of capulette open.	301	SSe-2 (a)	10-14	O	O
	c. Turn capulette working out the seamed edges and stitch 1/8 inch from seamed edges.	301	SSe-2 (b)	10-14	O	O
8.	Join capulette to hood.					
	Finished appearance. The capulette shall be carefully joined to the hood at the neck edge without distortion of the capulette.					
	a. Position capulette lining on inside of hood at the neck edge with raw edge of lining and hood even and with notches matching.					
	b. Join the capulette lining to the hood 1/4 inch from raw edges. The stitching shall extend from notch to notch.	301	LSq-2 (a)	10-14	O	O
	c. Turn under the raw edge of capulette and stitch to the hood 1/16 inch from the folded edge catching the turn under portion in the stitching.	301	LSd-1	10-14	O	O
9.	Make buttonholes.					
	Finished appearance. The buttonholes shall be clean cut, well made and correctly positioned. The buttonholes shall be well worked over gimp to fit a 30-line sewing hole button. The purling shall be on the outside of hood.					
	a. Make one horizontal eyelet-end taper-bar type buttonhole, cut 3/4 inch long, in each end of the extension piece, midway between the back and front edges. The inside edge of the eyelet-end of buttonhole shall be 3/4 to 7/8 inch from the pointed end of extension piece.	But-ton-hole		54 per button-hole includ-ing bar	A	A
10.	Mark for buttons.					
	a. Mark each side of the capulette at the end of the neckline seam (juncture) point of					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OP'N NO	OPERATION	STITCH TYPE	SEAM OR STITCH'G TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
10.	Mark for buttons. (cont'd)					
	the capulette and extension piece for the location of one 30-line button to engage buttonhole in the hood extension piece (see figure 1).					
11.	Sew on buttons.					
	Finished appearance. The buttons shall be securely sewn to the hood with stitching securely tacked.					
	a. Sew one 30-line button at each of the marks on the capulette.	101 or 301	20-22 per button	30/4		
			14-16 per button	30/4	30/4	
12.	Mark hoods.					
	a. The identification marking shall be legibly applied and positioned without smearing to the left or right of the center back seam of the lining.					
13.	Clean hood.					
	a. Trim any ends of stitching and remove any loose ends of thread from the hood. Remove any spots and stains.					

3.7 Seam sealant. The seam sealant shall be a pigmented solvent solution of copolymerized vinyl chloride and acrylonitrile rubber, plasticized with phosphate or phythalate ester plasticers, and may be filled to aid in shortening the drying time. A certificate of compliance covering the foregoing requirement shall be furnished to the contracting officer by the supplier. The sealant, when applied to the hood, shall produce a stripe which does not differ materially in color from the surrounding area. When tested as specified in Table III, the seam sealant shall comply with the requirements specified in Table II when used in combination with the coated fabric being used, i.e., supplier or Government furnished.

Table II. - Physical requirements of seam sealant

	Minimum	Maximum
Hydrostatic resistance of seams		
Initial	No leakage 1/	-
After resistance to low temperature	No leakage 1/ 2/	-
Blocking of seams (160°F) scale rating		No. 3
Solids content, percent	20	

1/ See 4.4.1.2.2(c) for definition of "leakage".
2/ After exposure to low temperature, the seam sealant shall show no cracking, flaking, or separation from the fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

3.8 Seam dusting material. To prevent blocking, all applied sealant shall be dusted with powdered mica not coarser than 160 mesh when tested as specified in Table III.

3.9 Sealing of seams and stitching. The seams joining the back center panel and the darts (operation 4) shall be sealed on the inside of the hood with a minimum of three coats of sealant specified in 3.7. The sealant shall have no less solid content at the time and point of application than specified in Table II. The sealant shall be brushed on and worked in such a manner as to completely wet and cover the stitching and needle holes and be worked under any turned and raw edges of the seams. The sealant shall be applied in such a manner as not to cause twists, pleats, or puckers on the seam or on the material adjacent to the seam.

3.10 Sealed seams dusted. The sealed seams shall be dusted with powdered mica specified in 3.8.

3.11 Repairs in the coating of the hood material.

3.11.1 Definition. Repairable areas generated during manufacture of the hood will be generally defined as follows:

3.11.1.1 Scuffs. Any break in the coated surface (nylon yarns intact) not exceeding 1/16 inch in width or 1-1/2 inches in length, other than a pick off of the coating or a pinhole.

3.11.1.2 Pinhole. A very small hole in the coating such as might be caused by puncturing the coating with a pin.

3.11.1.3 Needle holes. One or more left in the fabric after removal of the sewing thread.

3.11.1.4 Pick offs. Areas where the coating is removed from the nylon base material by separation of the plies of material after adhesion of surfaces to each other.

3.11.2 Repair compound. The repair compound shall be a suitably thinned and pigmented, room temperature curing, copolymerized vinyl chloride and acrylonitrile rubber, plasticized with phosphate or phthalate ester plasticizer, and shall be compatible with the coating on the fabric. The color of the applied and dried compound shall approximate the coated fabric in color.

3.11.3 Repair procedure. The repair compound shall be worked into the break in the coating on the coated side of the fabric, and spread smoothly and evenly over the damaged area. The repaired area shall then be lightly dusted with mica specified in 3.8.

3.11.4 Requirements for repaired area. The repaired area shall show no compound strikethrough, stiffening or other defects that would affect the serviceability or the appearance of the hood. The repair compound shall be well adhered to the coated fabric and when subjected to scrubbing action between the hands, shall show no lifting of the edge and no cracking, flaking or removal of the repair compound.

3.12 Workmanship. The finished hoods shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample approval. When required, preproduction samples shall be submitted to the Government for inspection. The preproduction sample shall be inspected for compliance to design, construction and workmanship required by this specification.

4.3 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.3.1 Inspection of components. The quality assurance provisions for components, except as otherwise required by this specification, shall be in accordance with applicable specifications and standards referenced herein.

4.3.1.1 Testing of components. Government material shall not be sampled or tested unless specifically requested by the Government. The inspection level for characteristics in Table III shall be S-1 of MIL-STD-105. The acceptable quality level (AQL) for each characteristic wherein the requirement is applicable to the sample unit shall be 6.5 defects per 100 units. For all other characteristics wherein the requirements are based on the sample average or where samples are composited for test purposes, there shall be no evidence of failure of any characteristic to meet the requirements as specified.

4.3.2 Inspection of the end item.

4.3.2.1 Examination of the end item. The defects found during examination of the end item shall be classified in accordance with list shown in 4.3.2.2.

4.3.2.1.1 Classification of defects. All defects shall be classified as indicated below except those with asterisk (*) in the classification column which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When affecting appearance or serviceability, but not seriously.

Note: Defects which involve departure from pattern location will be determined by unaided visual examination and will be checked against patterns only when visual examination results in uncertainty as to conformance with specified location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

4.3.2.2 General defects.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Buttonholes	a. Construction:			
	1. Any omitted or added.	X		
	2. Stitches not securely caught on fabric or pulling away from fabric.	X		
	3. Not corresponding with size of buttons so that they do not button properly.	X		
	4. One or more broken stitches:			
	-in one buttonhole.			X
	-in two buttonholes.		X	
	5. More than 2 skipped stitches in 1 buttonhole.			X
	6. More than 2 skipped stitches in 2 buttonholes.		X	
	7. Wrong type or uncut buttonhole.			X
	8. Gimp omitted:			
	-in one buttonhole.			X
	-in two buttonholes.		X	
	9. Ends of gimp not properly trimmed.			X
	10. End of buttonhole not securely tacked.		X	
	11. Ragged edges.			X
	12. Poorly made, affecting appearance (unless otherwise classified).		X	
	13. Placed less than 3/4 inch or more than 7/8 inch from pointed end of extension piece.		X	
Buttons	a. General:			
	1. 1 missing, loose, or broken.			X
	2. 2 missing, loose, or broken.		X	
	3. Not specified type, size, or color.		X	
	4. Any button placed more than 1/4 inch from juncture point of capulette and extension piece.		X	
Capulette	a. Points poorly shaped.			X
	b. Twisted or too full.	*		
Cleanness	a. Any spot or stain of a permanent nature on any portion of garment which would be visible when hood is worn.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	b. Any spot or stain of a permanent nature not visible when hood is worn.		X	
	c. Removable spot or stain visible on outside of hood.		X	
	d. Any removable spot or stain on inside of hood.			X
	e. Thread ends not trimmed throughout garment.			X
	f. Excessive mica distributed over exterior areas of hood.		X	
Edge	a. Any edge uneven or not properly forced out.	*		
	b. Any edge stretched.	*		
Labels	a. Identification label: -missing, incorrect, or illegible.		X	
Lining	a. Hood lining tight or twisted causing fullness or twists on outside of hood.	*		
	b. Excessive fullness on lining.		X	
Material Defects and workmanship damages	a. Any hole in basic fabric or lining.	X		
	b. Any weakening defect such as smash, multiple float or loose slub in basic fabric or lining.	X		
	c. Flaky, tacky, thin spots in the coating.	X		
	d. Permanent creases.	X		
	e. Any pick-off of coating.	X		
	f. Uneven or lumpy coating or foreign matter in the coating.			X
	g. Any blister.	X		
	h. Shade bars, streaks, unsightly slubs, etc., on the outside affecting appearance.	X		
	i. Any unauthorized recoating.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

Examine	Defect		Classification Major (*)	Minor A	Minor B
	j.	Needle chews.	X		
	k.	Scuff uncoated.	X		
	l.	Pinhole uncoated.	X		
	m.	Needle holes uncoated.	X		
	n.	Any scissor or knife cut, tear, mend, burn, or pick-off of coating.	X		
	o.	Repair compound on fabric cracks, lifts, or flakes when flexed or scrubbed.	X		
	p.	Exposed drill holes,	X		
Sealing of Seams and Stitching	a.	Any seam or stitching or needle holes required to be sealed, not properly sealed.	X		
	b.	Sealant not flexible, i.e., cracks or flakes when creased.	X		
	c.	Sealant tacky.	X		
Seams and Stitching	a.	General: 1. Seams badly twisted, pleated, or puckered.		*	
Note: A characteristic of nylon fabric is to show a certain amount of puckering at seams and stitching, this normal puckering is not to be classified as a defect.					
		2. Part of garment caught in any unrelated operation or stitching.			
		3. End of stitching, when not caught in other seam or stitching, not securely backstitched.		X	
		4. Wrong shade of thread, markedly in contrast with color and shade of garment.		*	
	b.	Gage of stitching, edge, raised stitching: 1. Irregular, i.e., unevenly gaged or stitching not uniform.			X
		2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
		3. Less than 1/16 inch from edge: -resulting in damage to material.	X		
		-not resulting in damage to material.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	c. Open seams:			
	1. Any seam open at center back panel seam			
	-open to any extent which permits ingress of water.	X		
	-open but not permitting ingress of water:			
	-1/8 to 1/4 inch.			X
	-open over 1/4 inch.		X	
	2. Any other seam open:			
	-open 1/8 inch but less than 1/4 inch.			X
	-open 1/4 inch or more.		X	
Note: One or more broken or 2 or more continuous skipped or run-off stitches constitute an open seam.				
	d. Raw Edges:			
	1. On outside:			
	-1/8 inch to 3/8 inch.			X
	-over 3/8 inch.	X		
	2. On inside:			
	-1/8 inch to 3/8 inch.			X
	-over 3/8 inch.		X	
Note: Raw edges not securely caught in stitching shall be classified as an open seam.				
	e. Run-offs:			
	1. On joining seams - When resulting in an open seam use "Open Seam" classification.			
	2. On top, edge or raised stitching (when not resulting in an open seam).			
	On outside:			
	-1/4 inch to 1/2 inch.			X
	-over 1/2 inch.		X	
	f. Seam and Stitch type:			
	1. Wrong seam type.		X	
	2. Wrong stitch type.		X	
	g. Stitch tension:			
	1. Loose tension over 2 inches in one area of a joining seam.	X		
	2. Loose tension 2 inches or more in one area of edge or raised stitching, resulting in loosely exposed bobbin thread or top thread.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	3. Tight tension (stitches break when normal strain is applied to the seam or stitching).	X		
	4. Unbalanced tension, one thread tighter than the other.	X		
	h. Stitches per inch. To be scored only when the condition exists on major portion of seam or stitching.			
	1. Stitches less than minimum specified:			
	-1 stitch per inch.			X
	-2 stitches per inch.		X	
	-3 or more stitches per inch.	X		
	2. Stitches over the maximum specified:			
	-1 stitch per inch.		X	
	-2 stitches per inch.	X		
	i. Stitches skipped or broken (on edge or raised stitching when seam is seamed, turned and stitched.			
	1. More than 1/2 inch at 1 place, or 1/2 inch or less at 2 or more places.			X
Shaded Parts	a. Outside: Any outside part shaded.	*		
	b. Inside:			
	1. Any inside part shaded.			X

4.3.2.3 Acceptable quality levels. The acceptable quality level expressed in defects per 100 units (DHU) and inspection level shall be as follows:

	Inspection Level	Major	AQL Major and Minor A	Major Minor A and Minor B
For 4.3.2.2	II	2.5	40.0	100.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

MIL-H-82142(MC)

Table III - Component Testing Requirements

Component	Characteristic	Reqmt. Para.	Test Method 1/	Rqmt Applicable to S/U Lot Avg	Smpl Unit	# Det Per S/U	Results reported as Pass or Fail	Results reported as To Nearest
Seam Sealant	Hydrostatic	Table II	4.4.1.2	X	1 pint composite and 1 yd of coated fabric & prepared seam	5	X	
	Resistance low temperature	Table II	4.4.1.3	X		3	X	
	Blocking	Table II	4.4.1.4	X		3	X	
	Solids Content	Table II	4.4.1.5	X		2		0.5
	Composition	3.7	Certificate of Compliance					
Seam Dusting	Identification	3.8	Standard	X	1 oz.		X	

1/ Paragraph reference or CCC-T-191 Methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

4.3.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of the applicable specifications are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content (exterior and interior)	Number of intermediate packages is more or less than required.

4.3.4 Tests. The method of testing specified in CCC-T-191, wherever applicable, and as listed in Table III shall be followed. All requirements apply to the sample unit requirement except where otherwise indicated.

4.4 Test methods. All tests, except as otherwise specified, shall be performed at prevailing conditions of temperature and relative humidity.

4.4.1 Testing of seam sealant.

4.4.1.1 Preparation of specimens. The contractor shall prepare a 2 yard sample seam by joining two 5 inch wide pieces of the coated fabric with seam type LSc-2, stitch type 301, 10 to 14 stitches per inch, thread size 0/3 for needle and 0/3 for bobbin and sealing by the method specified in 3.9.

4.4.1.2 Hydrostatic. The hydrostatic resistance of the seam sealant shall be tested by using test specimens prepared as specified in 4.4.1.1.

4.4.1.2.1 Apparatus. The apparatus shall be as described in Method 5514 of CCC-T-191.

4.4.1.2.2 Procedure.

(a) The test specimen shall be clamped in the test apparatus with the sealed seam in the center of the 4-1/2 inch diameter test area, with the uncoated side of the fabric in contact with the water.

(b) The hydrostatic head shall be raised to 25 centimeters at a rate of approximately one centimeter per second and held at that pressure for 3 minutes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

(c) Leakage shall be defined as the appearance of water at three different places in any portion of the 4-1/2 inch diameter test areas.

4.4.1.3 Resistance to low temperature. The resistance to low temperature of the seam sealant shall be tested using test specimens prepared as specified in 4.4.1.1. Test Method 5874 of CCC-T-191 shall be used with the following exceptions:

(a) Test specimens shall measure 6 by 8 inches with the seam in the center running the full 8 inch length.

(b) The seam shall be folded over on itself once to a size of 6 by 4 inches with the coated side of the fabric in the center of the folded specimen.

(c) The roller weight shall be run along the fold line.

(d) Paragraphs 4.4 thru 4.6.1 and 5.2 thru 5.3 do not apply.

4.4.1.4 Blocking resistance. The resistance to blocking of the seam sealant shall be tested using test specimens prepared as specified in 4.4.1.1. Method 5872 of CCC-T-191 shall be used with the following exceptions:

(a) Test specimens shall measure 6 by 8 inches with the seam in the center running the full 8 inch length.

(b) The seam shall be folded over on itself once to a size of 6 by 4 inches with the coated side of the fabric in the center of the folded specimen.

(c) The test temperature shall be 160 $\pm$ 1.6°F.

(d) A one pound weight shall be distributed evenly along the seam.

4.4.1.5 Solids content. The solids content of the seam sealant shall be determined by Method 4021 of FED. STD. 175.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. The hoods shall be folded in a neat manner and put up in bundles of 10 to a bundle, and tied across width and length with cotton tape.

5.1.2 Level C. Hoods shall be packaged in accordance with the industry's practice.

5.2 Packing.-Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Fifty hoods, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to requirements for class-weather resistant, size No. 1A, grade V3C of MIL-B-17757. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.1.2 Method 2. When specified, twelve level B shipping containers (600 hoods) shall be packed in a fiberboard shipping container conforming to class-weather resistant, size No. 4 of MIL-B-17757.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Fifty hoods, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to type CF or SF, class-domestic grade 275, size No. 1A of MIL-B-17757. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.3 Level C. Hoods, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The hoods are intended for wear by women of the U.S. Marine Corps.

6.2 Ordering data. Procurement documents should specify the following:


(a) Title, number and date of this specification.
(b) Whether preproduction sample approval is required (see 3.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Sample and shade sample. For information regarding the availability of sample hood, and of the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Supersession data. This specification supersedes Marine Corps Purchase Description (MCSA) dated 27 December 1951 for Hood for Raincoat, Woman's M-1952.

Preparing Activity:
Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

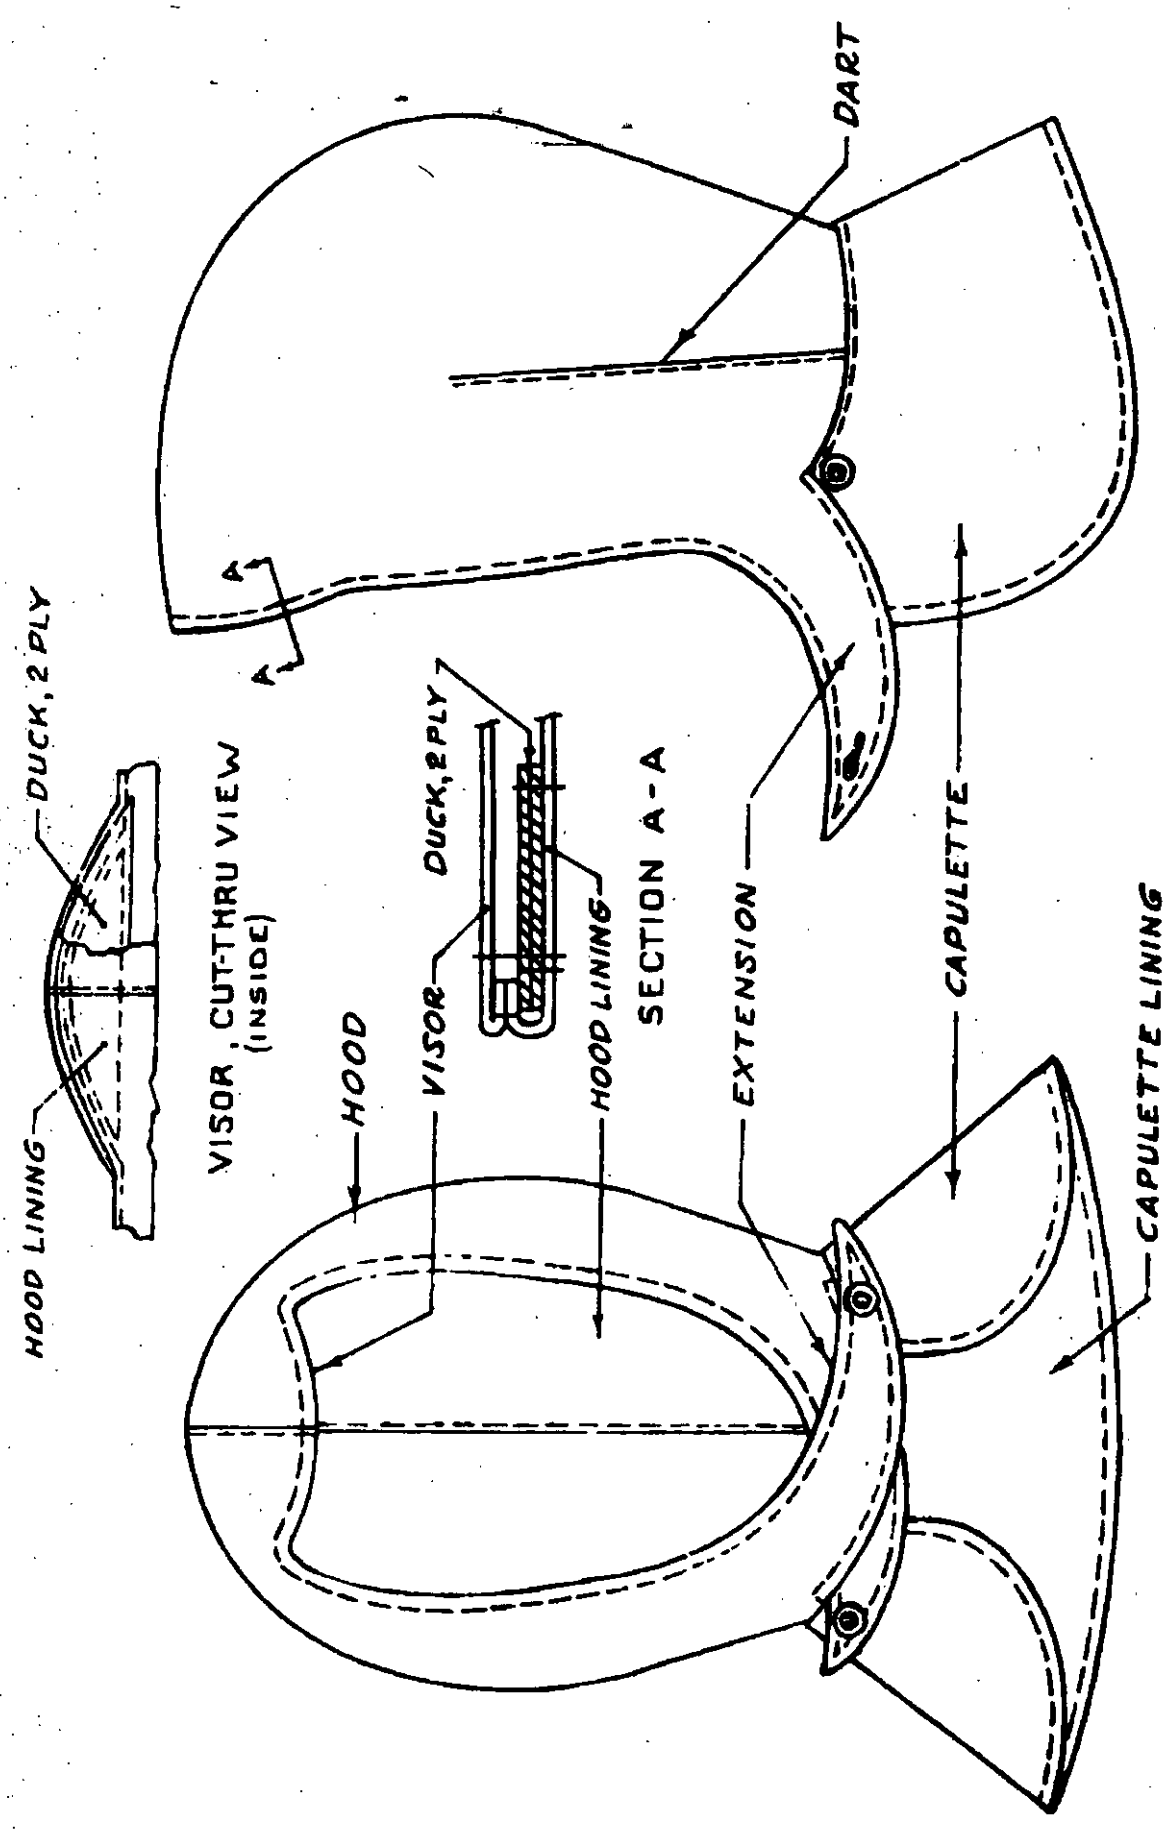

M.C.S.A. 826-R&F 2 Feb '67

FIGURE 1. HOOD, RAIN, WOMAN'S: NYLON, RUBBER COATED; GREEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.