FED. SUP CLASS
2590

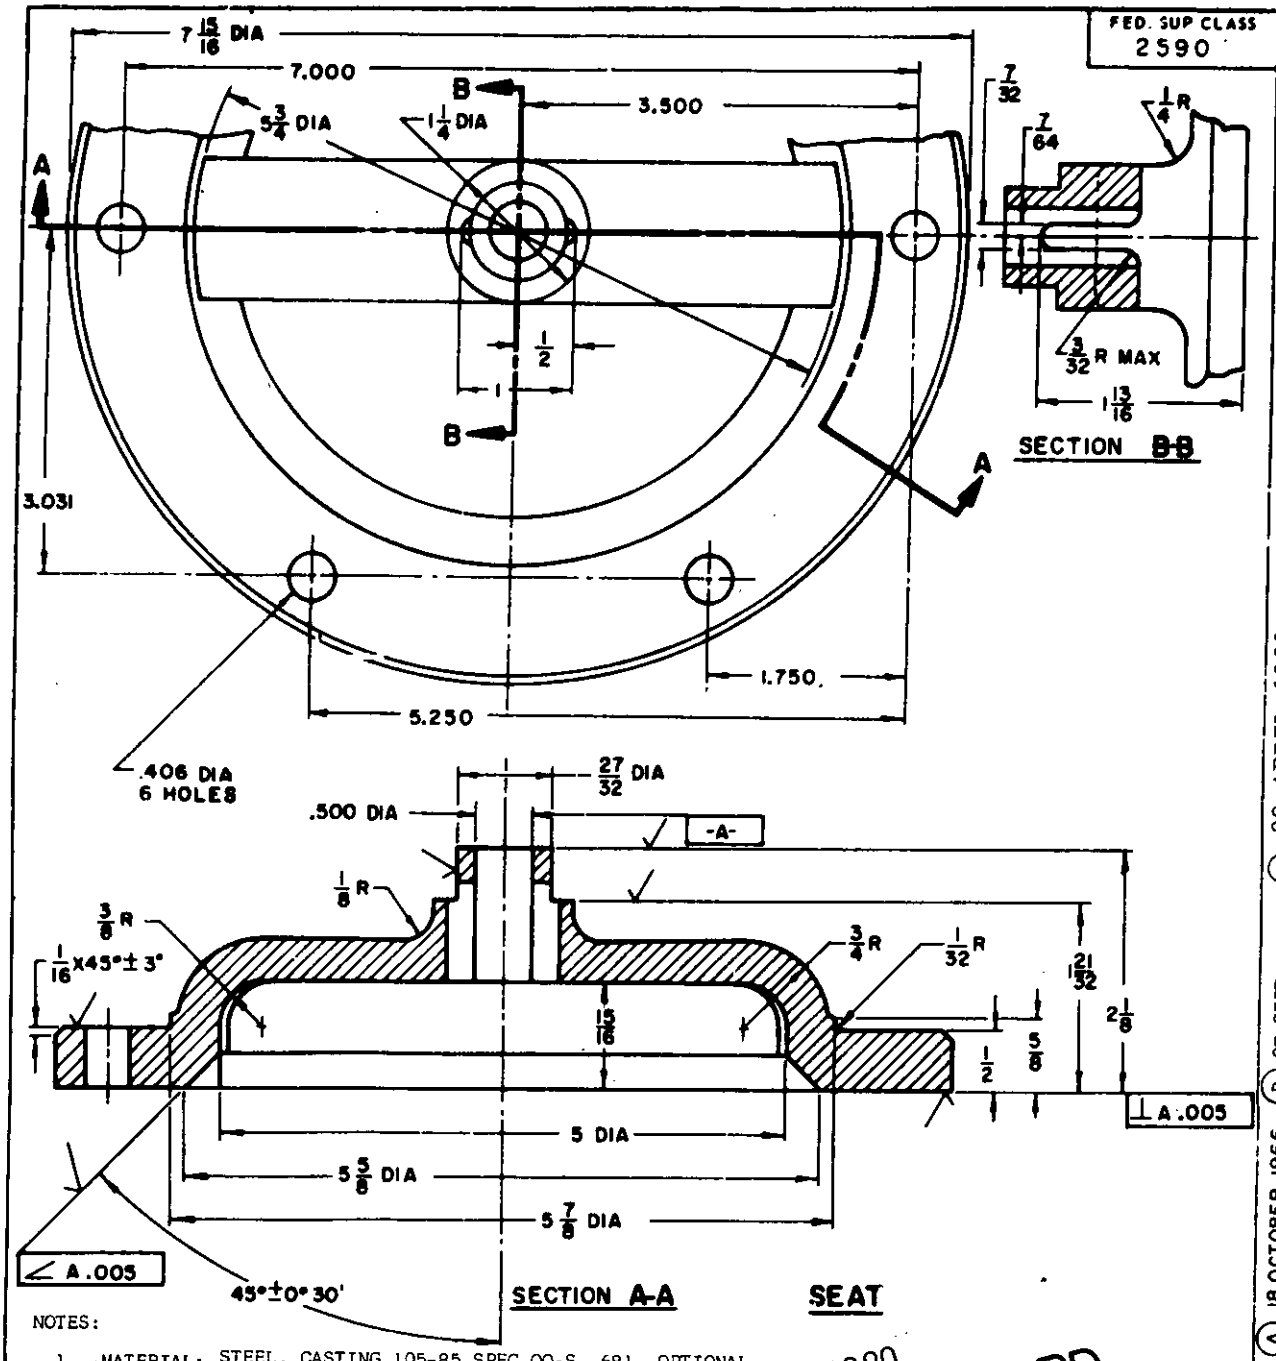

NOTES:

1. MATERIAL: STEEL, CASTING, 105-85, SPEC QQ-S- 681, OPTIONAL 8130, 4130 OR 5130. GRADE D, SPEC MIL-S- 46172
2. HEAT-TREAT: QUENCH AND TEMPER, BRINELL
3. FINISH: CADMIUM PLATE IN ACC
4. UNLESS OTHERWISE ... 125 WHERE SHOWN WITH ROUGHNESS SYMBOL ✓ ... WITH MIL-STD-10. REMOVE ALL BURRS AND SHARP
5. ...IONS ARE IN INCHES. TOLERANCES ARE: MACHINED SURFACES, ... .005, ANGLES ± 00 30': UNMACHINED SURFACES, FRACTIONS ± 1/32,
6. DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

© CANCELLED AFTER 30 APRIL 1980.
NO SUPERSEDING STANDARD.

APPROVED 9 JANUARY 1961 (A) REVISED 18 OCTOBER 1966 (B) 27 SEPT 1977 (C) 30 APRIL 1980

MS PART NO.
MS 51347-1

P A: ARMY-AT Other Cust	SEAT, HULL DRAIN POPPET VALVE: ASSEMBLY, VEHICULAR, 5 INCH	MILITARY STANDARD MS51347 (AT)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1

This standard has been approved by the U. S. Army Tank-Automotive Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.