FED. SUP CLASS
2590

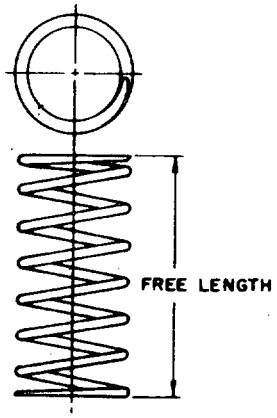

SPRING SPECIFICATION

DIAMETER OF WIRE	IN. .095
DIAMETER OF COIL	INSIDE 29/32 ±1/32
FREE LENGTH	IN. 2.360 ±.020
ACTIVE COILS	REF. 6-1/4
TOTAL COILS	REF. 7-1/2
DIRECTION OF HELIX	OPTIONAL
LOAD AT COMPRESSED LENGTH OF 1-1/32 IN.	= 16 LB. ±1-1/2 LB.
SPRING RATE	REF. 12 LB./IN.
SOLID LENGTH	IN. MAX. 13/16
TYPE OF ENDS	CLOSED ENDS GROUND

SQUARENESS OF ENDS IN FREE POSITION WITHIN 3°

THIS SPRING IS PART OF VALVE ASSEMBLIES MS 51342, MS 51345, AND MS 51348.

NOTES:

1. MATERIAL: WIRE, STEEL, HIGH CARBON, SPRING, BRIGHT, MUSIC, SPEC. QQ-W-470.
2. FINISH: CADMIUM PLATE, IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2.
3. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ±1/32 ON FRACTIONS, ±.020 ON DECIMALS.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
5. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

Ⓐ ALL NOTES REVISED

APPROVED 9 JANUARY 1961 REVISED Ⓐ 18 OCTOBER 1966

MS PART NO.
MS 51350 -1

P.A. ARMY - AT Other Cust	TITLE SPRING-VALVE ASSEMBLY, POPPET, HULL DRAIN	MILITARY STANDARD MS 51350 (AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This standard has been approved by the U. S. Army Tank-Automotive Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.