FED. SUP CLASS
2590

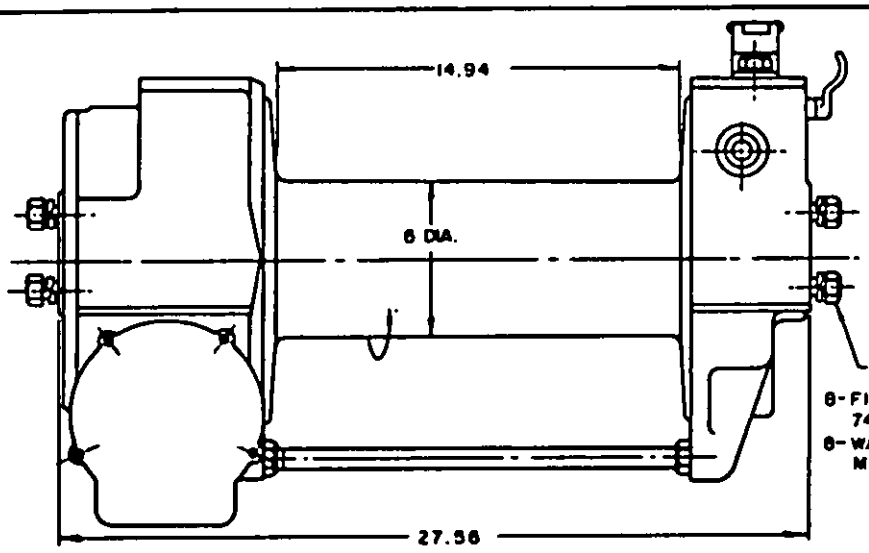

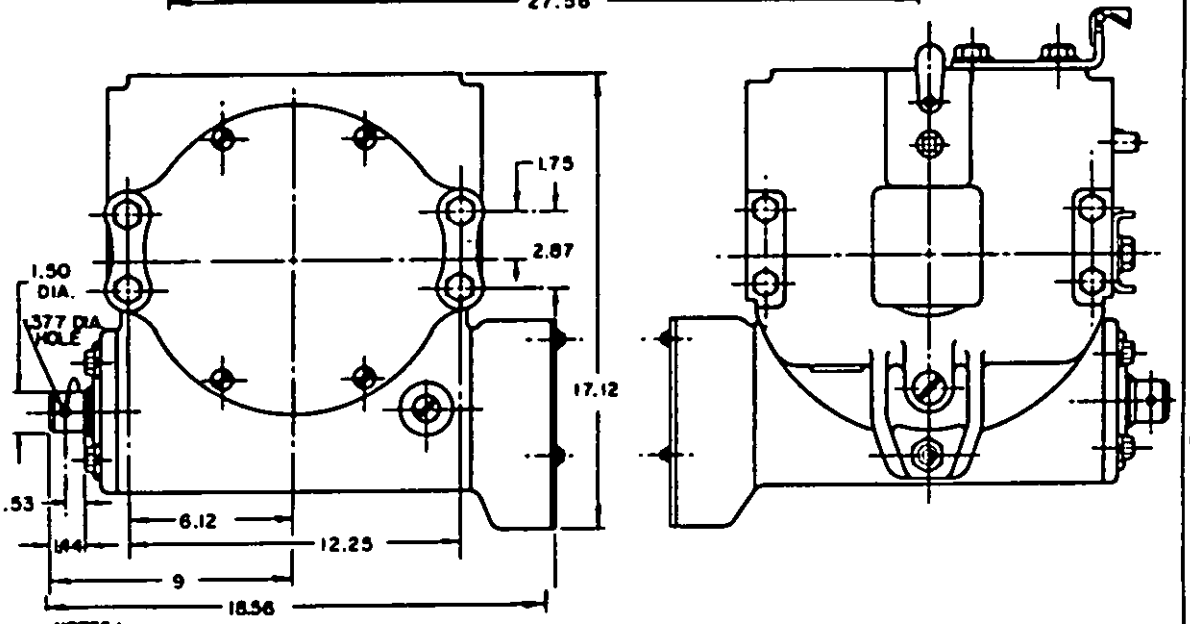

NOTES:

1. ENGINEERING DATA BASED ON WINDING SPEED OF 15 FEET PER MINUTE ON BARE DRUM, RATED LOAD, AND ASSUMED 50% EFFICIENCY:

RPM-INPUT SHAFT	250
TORQUE-INPUT SHAFT	3427 INCH POUNDS
GEAR RATIO	29 TO 1
CABLE SIZE	5/8 INCH
CABLE LENGTH	300 FEET
WEIGHT	350 POUNDS

2. THIS WINCH SHALL CONFORM TO TYPE II, CLASS 3 OF MIL-W-46735.
3. DIMENSIONS SHOWN ARE IN INCHES AND ARE FOR ENGINEERING REFERENCE ONLY.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.
7. DETAILS OF THIS ASSEMBLY SHALL BE IN ACCORDANCE WITH REFERENCED DRAWING WHICH MAY BE OBTAINED FROM U.S. ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICHIGAN 48090.

(B) DENOTES CHANGE

MS PART NO.	REF. DWG. NO.
MS 51353-1	7954486

APPROVED 27 JAN 1961 REVISED (A) 11 NOVEMBER 1966 (B) 22 JANUARY 1980

USER ACTIVITIES: ARMY-MI, ME

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC N/A

P A ARMY-AT Other Cust	TITLE WINCH, DRUM, VEHICLE MOUNTING: BASIC, MECHANICALLY DRIVEN, 20,000 LB. CAPACITY	MILITARY STANDARD MS 51353 (AT)
PROCUREMENT SPECIFICATION (B)	SUPERSEDES	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.

DD FORM 1000, 672-1 (Revised coordination)

2590-A009