FED. SUP CLASS
2640

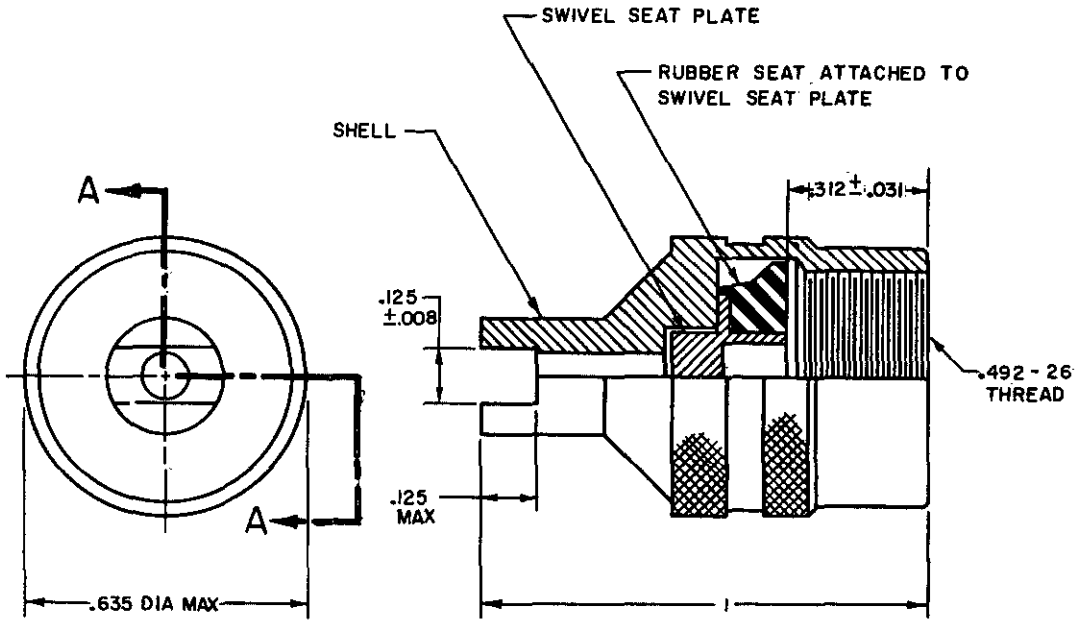

SECTION AA

TYPE IV, CLASS 2 - OF PROCUREMENT SPECIFICATION

TR DENOTES TIRE AND RIM ASSOCIATION

NOTES:

1. FINISH - CHEMICAL BLACK, SPECIFICATION MIL-F-495 WHERE PRACTICAL.
2. REMOVE SHARP EDGES.
3. DIMENSIONS SHOWN ARE IN INCHES.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. MARKING SHALL CONSIST OF THE MS PART NUMBER, T & R IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130 OR MIL-STD-129.

© CANCELLED AFTER 25 MARCH 1977
FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARDS YEARBOOK PER ZZ-V-25

APPROVED 23 MARCH 1961 REVISED (A) 28 JUNE 1963 (B) 12 APRIL 1967 © 25 MARCH 1977

USER ACTIVITIES: ARMY-MI, ME

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

MS PART NO.	TR IDENT NO.
MS 51376-1	TR-VC-6

P.A. ARMY-AT Other Cust NAVY-YD AF-84	TITLE CAP, TIRE VALVE: LARGE BORE	MILITARY STANDARD MS51376
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil/ Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 67 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

2640-0169