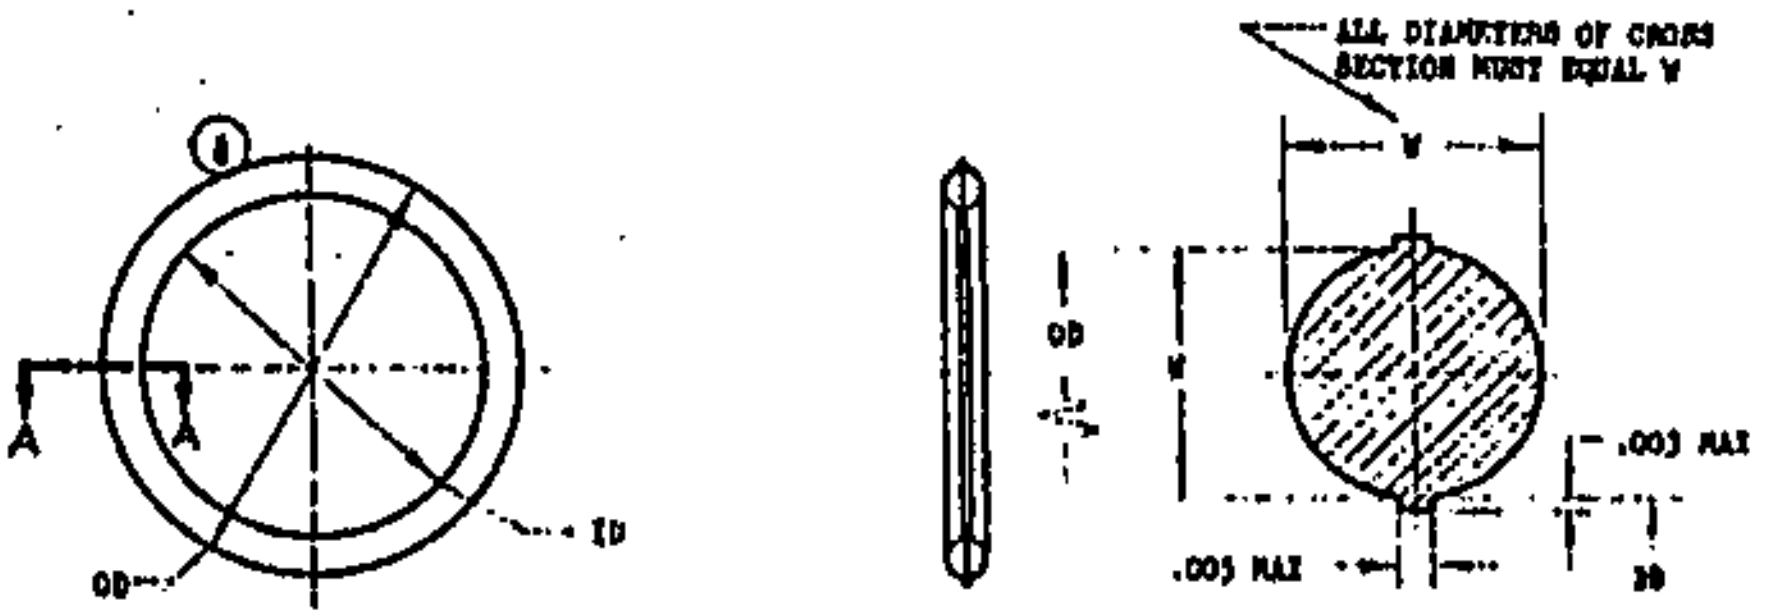

ENLARGED VIEW OF SECTION A-A

DASH NO.	NOMINAL			ACTUAL SIZE	
	W	ID	OD	W	ID
1	1/16	1/8	1/4	.070 ±.003	.114 ±.005
2	1/16	5/32	9/32	.070 ±.003	.145 ±.005
3	1/16	3/16	5/16	.070 ±.003	.176 ±.005
4	1/16	7/32	11/32	.070 ±.003	.208 ±.005
5	1/16	1/4	3/8	.070 ±.003	.239 ±.005
6	1/16	5/16	7/16	.070 ±.003	.301 ±.005
7	1/16	3/8	1/2	.070 ±.003	.364 ±.005
8	3/32	3/8	9/16	.103 ±.003	.362 ±.005
9	3/32	7/16	5/8	.103 ±.003	.424 ±.005
10	3/32	1/2	11/16	.103 ±.003	.487 ±.005
11	3/32	9/16	3/4	.103 ±.003	.549 ±.005
12	3/32	5/8	13/16	.103 ±.003	.612 ±.005
13	3/32	11/16	7/8	.103 ±.003	.674 ±.005
14	3/32	3/4	15/16	.103 ±.003	.737 ±.005
15	1/8	3/4	1	.139 ±.004	.734 ±.006
16	1/8	13/16	1-1/16	.139 ±.004	.796 ±.006
17	1/8	7/8	1-1/8	.139 ±.004	.859 ±.006
18	1/8	15/16	1-3/16	.139 ±.004	.921 ±.006
19	1/8	1	1-1/4	.139 ±.004	.984 ±.006
20	1/8	1-1/16	1-5/16	.139 ±.004	1.046 ±.006
21	1/8	1-1/8	1-3/8	.139 ±.004	1.109 ±.006
22	1/8	1-3/16	1-7/16	.139 ±.004	1.171 ±.006
23	1/8	1-1/4	1-1/2	.139 ±.004	1.234 ±.006
24	1/8	1-5/16	1-9/16	.139 ±.004	1.296 ±.006
25	1/8	1-3/8	1-5/8	.139 ±.004	1.359 ±.006
26	1/8	1-7/16	1-11/16	.139 ±.004	1.421 ±.006
27	1/8	1-1/2	1-3/4	.139 ±.004	1.484 ±.006
28	3/16	1-1/2	1-7/8	.210 ±.005	1.475 ±.010
29	3/16	1-5/8	2	.210 ±.005	1.600 ±.010
30	3/16	1-3/4	2-1/8	.210 ±.005	1.725 ±.010
31	3/16	1-7/8	2-1/4	.210 ±.005	1.850 ±.010
32	3/16	2	2-3/8	.210 ±.005	1.975 ±.010
33	3/16	2-1/8	2-1/2	.210 ±.005	2.100 ±.010
34	3/16	2-1/4	2-5/8	.210 ±.005	2.225 ±.010
35	3/16	2-3/8	2-3/4	.210 ±.005	2.350 ±.010
36	3/16	2-1/2	2-7/8	.210 ±.005	2.475 ±.010
37	3/16	2-5/8	3	.210 ±.005	2.600 ±.010
38	3/16	2-3/4	3-1/8	.210 ±.005	2.725 ±.015
39	3/16	2-7/8	3-1/4	.210 ±.005	2.850 ±.015
40	3/16	3	3-3/8	.210 ±.005	2.975 ±.015
41	3/16	3-1/8	3-1/2	.210 ±.005	3.100 ±.015
42	3/16	3-1/4	3-5/8	.210 ±.005	3.225 ±.015
43	3/16	3-3/8	3-3/4	.210 ±.005	3.350 ±.015
44	3/16	3-1/2	3-7/8	.210 ±.005	3.475 ±.015
45	3/16	3-5/8	4	.210 ±.005	3.600 ±.015
46	3/16	3-3/4	4-1/8	.210 ±.005	3.725 ±.015
47	3/16	3-7/8	4-1/4	.210 ±.005	3.850 ±.015
48	3/16	4	4-3/8	.210 ±.005	3.975 ±.015
49	3/16	4-1/8	4-1/2	.210 ±.005	4.100 ±.015
50	3/16	4-1/4	4-5/8	.210 ±.005	4.225 ±.015
51	3/16	4-3/8	4-3/4	.210 ±.005	4.350 ±.015
52	3/16	4-1/2	4-7/8	.210 ±.005	4.475 ±.015
53	1/4	4-5/8	5-1/8	.275 ±.006	4.600 ±.015
54	1/4	4-3/4	5-1/4	.275 ±.006	4.725 ±.015
55	1/4	4-7/8	5-3/8	.275 ±.006	4.850 ±.015
56	1/4	5	5-1/2	.275 ±.006	4.975 ±.015
57	1/4	5-1/8	5-5/8	.275 ±.006	5.100 ±.023
58	1/4	5-1/4	5-3/4	.275 ±.006	5.225 ±.023
59	1/4	5-3/8	5-7/8	.275 ±.006	5.350 ±.023
60	1/4	5-1/2	6	.275 ±.006	5.475 ±.023
61	1/4	5-5/8	6-1/8	.275 ±.006	5.600 ±.023
62	1/4	5-3/4	6-1/4	.275 ±.006	5.725 ±.023
63	1/4	5-7/8	6-3/8	.275 ±.006	5.850 ±.023
64	1/4	6	6-1/2	.275 ±.006	5.975 ±.023
65	1/4	6-1/4	6-3/4	.275 ±.006	6.225 ±.023
66	1/4	6-1/2	7	.275 ±.006	6.475 ±.023
67	1/4	6-3/4	7-1/4	.275 ±.006	6.725 ±.023
68	1/4	7	7-1/2	.275 ±.006	6.975 ±.023
69	1/4	7-1/4	7-3/4	.275 ±.006	7.225 ±.030
70	1/4	7-1/2	8	.275 ±.006	7.475 ±.030
71	1/4	7-3/4	8-1/4	.275 ±.006	7.725 ±.030
72	1/4	8	8-1/2	.275 ±.006	7.975 ±.030
73	1/4	8-1/2	9	.275 ±.006	8.475 ±.030
74	1/4	9	9-1/2	.275 ±.006	8.975 ±.030
75	1/4	9-1/2	10	.275 ±.006	9.475 ±.030
76	1/4	10	10-1/2	.275 ±.006	9.975 ±.030
77	1/4	10-1/2	11	.275 ±.006	10.475 ±.030
78	1/4	11	11-1/2	.275 ±.006	10.975 ±.030
79	1/4	11-1/2	12	.275 ±.006	11.475 ±.030
80	1/4	12	12-1/2	.275 ±.006	11.975 ±.030
81	1/4	12-1/2	13	.275 ±.006	12.475 ±.030
82	1/4	13	13-1/2	.275 ±.006	12.975 ±.030
83	1/4	13-1/2	14	.275 ±.006	13.475 ±.030
84	1/4	14	14-1/2	.275 ±.006	13.975 ±.030
85	1/4	14-1/2	15	.275 ±.006	14.475 ±.030
86	1/4	15	15-1/2	.275 ±.006	14.975 ±.030
87	1/4	15-1/2	16	.275 ±.006	15.475 ±.030
88	1/4	4-1/2	5	.275 ±.006	4.475 ±.015

EXAMPLE OF PART NO.: AN6227-32 = PACKING WITH NOMINAL OD OF 2-3/8, ID OF 2 INCHES, MATERIAL - CLASS B OF SPEC MIL-P-5516.

⑧ ~~MARKING.--ONE DOT OF COLORED IDENTIFICATION DOTS IN ACCORDANCE WITH ANA BULLETIN NO. [illegible]~~

SEE SPECIFICATION MIL-P-5514 FOR INSTALLATION DETAILS.

DIMENSIONS IN INCHES. INACTIVE FOR NEW DESIGN. ⑨ AFTER 13 JULY 1981 USE MS28775.

FOR ACCEPTABLE PRODUCTS SEE QPL-5516.

ASSEMBLY DRAWINGS SHALL SPECIFY PACKINGS ONLY BY THEIR AN6227 NUMBER WITHOUT REFERENCE TO TYPE B, BUT REGARDLESS OF AN6227 CALLOUT, CLASS B PACKINGS ARE TO BE USED. DESIGNATION AN6227B IS TO BE USED FOR PACKAGING OR STOCKING.

⑧ CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/27 AND STANAG 3444. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments [illegible]

Review activities:
Army - [illegible], AV
Navy - AS
USAF - 69, 85

APPROVED 2 Apr 42 REVISED ① 30 Jan 43 ② 13 Oct 43 ③ 14 Feb 44 ④ 24 Apr 45 ⑤ 20 Oct 45 ⑥ 23 Jul 53 ⑦ 14 Jul 56 ⑧ 1 June 67 ⑨ 13 JULY 81

PROCUREMENT SPECIFICATION MIL-P-5516	AIR FORCE-NAVY AERONAUTICAL STANDARD PACKING, "O" RING HYDRAULIC	AN6227

☆ U.S. GOVERNMENT PRINTING OFFICE: 1982—605-034-342

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.