INCH-POUND

AN6236 Rev 5
18 June 2008
SUPERSEDING
AN6236 Rev 4
27 Mar 1951

MILITARY SPECIFICATION SHEET

FILTER ELEMENT - HYDRAULIC REPLACEABLE MICRONIC RESERVOIR TYPE

Inactive for new design, dated 22 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-F-5504.

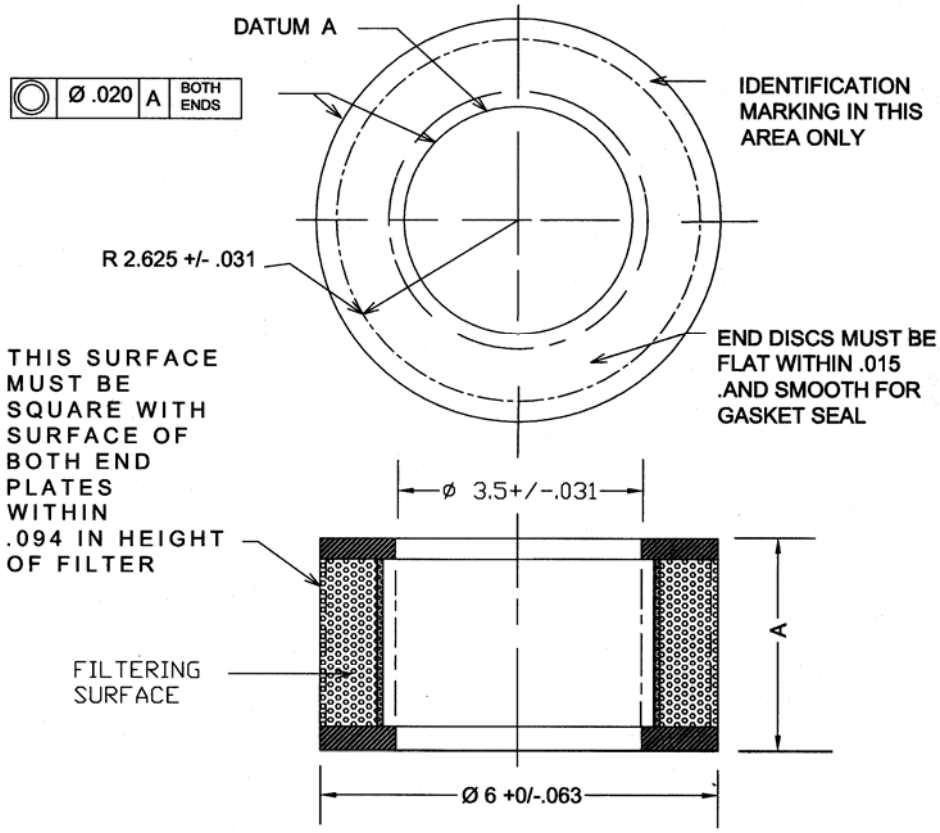


FIGURE 1. Filter element dimensions and configuration.

AMSC N/A FSC 1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.

TABLE I. Element dimensions.

Part or Identification Number (PIN)	Capacity gpm	A +.000 −.063	Oil displacement wet (max) cu in	Weight dry max lb.
AN6236-1	7.50	1.969	25	0.60
AN6236-2	15.00	4.000	40	0.90
AN6236-3	30.00	8.063	65	1.80

REQUIREMENTS:

1. Material: See MIL-F-5504, the procurement specification.

2. Finish: See MIL-F-5504, the procurement specification.

NOTES:

1. These elements are for use with hydraulic reservoirs.

2. These elements are qualified items; the suppliers are listed in QPL-5504.

3. Dimensions are in inches.

4. Tolerances are as specified in table I and on figure 1.

5. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army-AV
Navy-AS
Air Force-99

Preparing activity:
Navy-AS

(Project 1650-2008-004)

Review activities:
Army-MI
Navy-MC, SA, SH
Air Force-71
DLA-CC, GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.