
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

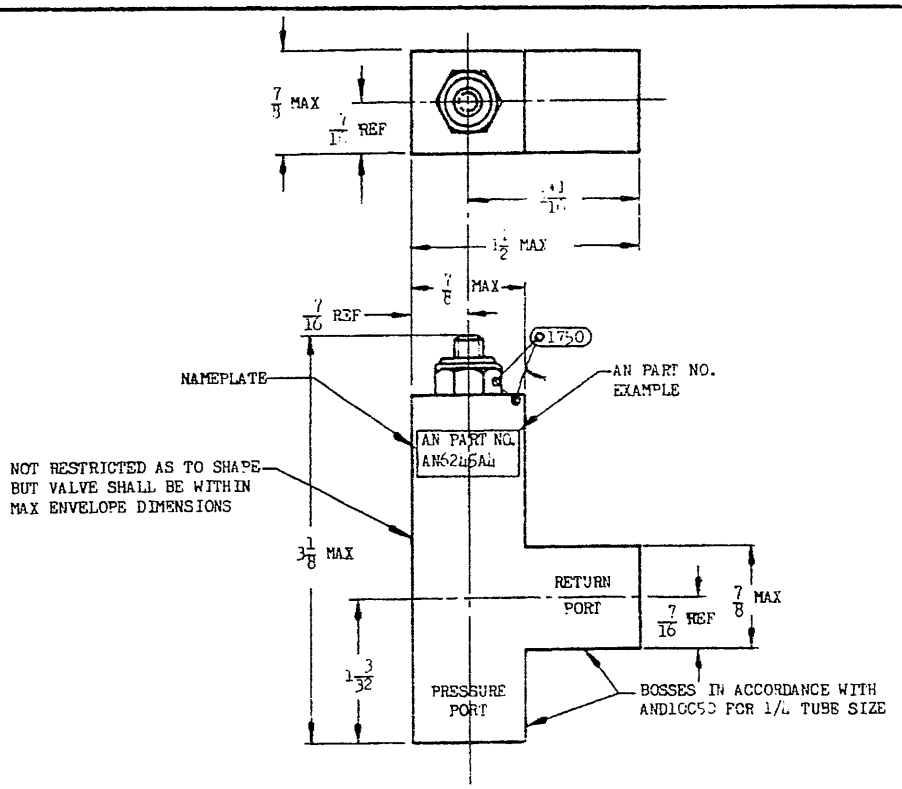

TUBE OD	AN PART NUMBERS		
	PRESSURE RANGE 1000 TO 2100 PSI	PRESSURE RANGE 2100 TO 3100 PSI	PRESSURE RANGE 1000 TO 4100 PSI
1/4	AN6245AH	AN6245BH	AN6245ABH

(4) THE AB VALVE IS ACCEPTABLE AS A SUBSTITUTE FOR THE A OR B VALVES.

FOR CONTRACTOR PROCUREMENT ONLY - CRACKING PRESSURE, IN POUNDS PER SQUARE INCH, MAY APPEAR AS A CODE NUMBER ON THE SEAL OF THE ADJUSTING NUT LOCKWIRE TO INDICATE CRACKING PRESSURE OF INDIVIDUAL VALVES. THIS CODE NUMBER SHALL NOT APPEAR ON THE NAMEPLATE OR ANY OTHER PART OF THE VALVE PROPER. NOTATIONS ON AIRPLANE CONTRACTOR'S SCHEMATIC AND INSTALLATION DRAWINGS SHALL CONSIST OF THE AN PART NUMBER FOLLOWED BY THIS CODE NUMBER IN PARENTHESES. AS AN ILLUSTRATION, AN6245AH (1750) APPEARING ON A CONTRACTOR'S DRAWING DENOTES A VALVE HAVING A PRESSURE RANGE OF 1000 TO 2100 PSI, 1/4 TUBING OD PORT SIZE AND SET TO CRACK AT 1750 PSI.

FOR GOVERNMENT PROCUREMENT - THE SERVICES WILL NOT PROCURE OR STOCK AN6245 VALVES ACCORDING TO INDIVIDUAL PRESSURE SETTING. ACCORDINGLY, GOVERNMENT RECORDS SUCH AS PARTS CATALOGS, PROCUREMENT DOCUMENTS, ETC., WILL REFER TO AN6245AH AND AN6245BH ONLY. THE CODE NUMBER SHALL NOT APPEAR ON THE LOCKWIRE SEAL NAMEPLATE, OR ANY OTHER PART OF VALVES PROCURED DIRECTLY BY THE SERVICES.

FOR ACCEPTABLE PRODUCTS, SEE QPL-5527.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.

THE AIRPLANE OR ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING, FOR INSTALLATIONS.

APPROVED 13 Jul 45 REVISED (1) 30 Jan 46 (2) 9 Jun 50 (3) 17 Nov 50 (4) 13 Oct 53

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN6245
MIL-V-5527	VALVE-HYDRAULIC THERMAL EXPANSION RELIEF	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.