INCH-POUND


AN6270 REV 9
29 March 2012
SUPERSEDING
AN6270 REV 8
8 January 2002

DETAIL SPECIFICATION SHEET

HOSE ASSEMBLY - DETACHABLE SWIVEL FITTING, LOW PRESSURE

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

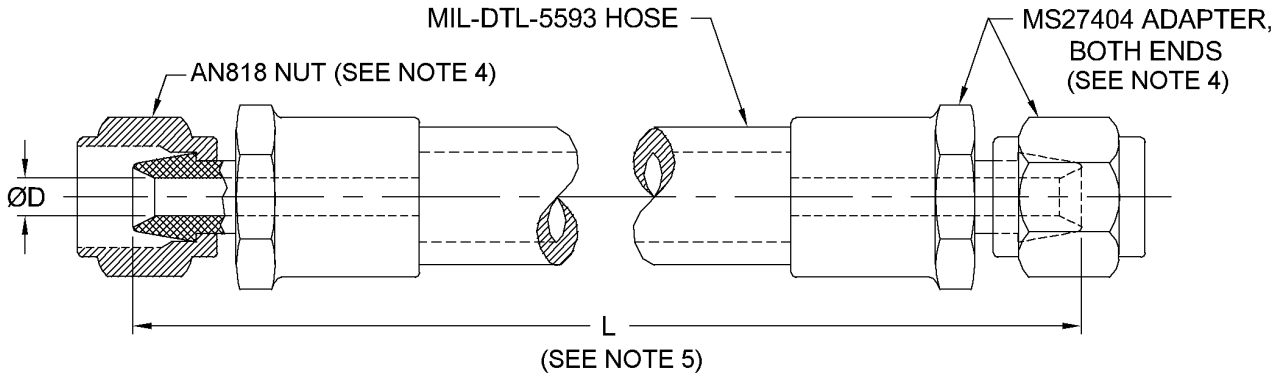

Dash size	Tubing OD	Hose	Hose ID (nominal) inch (mm)	Adapter (see note 3 and 4)	D Min ±.010 (0.25) inch (mm)
-2	.125	M5593-2	.125 (3.18)	MS27404-2	.052 (1.32)
-3	.188	M5593-3	.188 (4.78)	MS27404-3	.109 (2.77)
-4	.250	M5593-4	.250 (6.35)	MS27404-4	.156 (3.96)
-6	.375	M5593-6	.375 (9.53)	MS27404-6	.281 (7.14)
-8	.500	M5593-8	.500 (12.30)	MS27404-8	.375 (9.53)
-10	.625	M5593-10	.625 (15.88)	MS27404-10	.453 (11.51)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. See table I for fitting materials and table II for fitting finishes.
4. MS27404 adapter assembly consists of a socket and an AN818 nut.
5. “L” is hose assembly length.
6. Dimensioning and tolerancing: ASME Y14.5M.

FIGURE 1. Hose assembly dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The hose shall be a product that is listed on QPL-5593. The adapter shall be a product that is listed on QPL-38726.

Hose assembly length “L” shall be specified with the following tolerances:

a. Less than 12 inches (304.8 mm) long (tolerance ±.12 (3.05 mm)).
b. 12 to 18 inches (304.8 to 457.2 mm) long (tolerance ±.25 (6.35 mm)).
c. Greater than 18 inches (457.2 mm) long (tolerance ±.50 (12.70 mm)).

The hose assembly shall be proof pressure tested in accordance with MIL-DTL-5593.

Materials shall be in accordance with MIL-DTL-38276, see table I for material designators.

TABLE I. Material designators.

Designator	Material
J	Corrosion resistant steel (CRES), type 304
K	Corrosion resistant steel (CRES), type 316
P	Chrome-molybdenum steel 4130
S	Steel 4140
T 1/	Titanium
W	Aluminum alloy 7075-T73

1/ Not to be used on oxygen systems.

Finishes shall be in accordance with MIL-DTL-38726, see table II for plating finish designators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.

TABLE II. Material finish identification codes.

Plating finish designator	Material	Plating Finish
Blank	Steel 4130 or 4140	Cadmium
CN		Cadmium plating with NAVAIR trivalent chromium pretreatment (TCP)
E		NAVAIR TCP
F	Steel 4130 or 4140	Zinc plate (finish J, P, or R) with NAVAIR TCP
Blank	Aluminum	Anodized
H	Steel 4130 or 4140	Aluminum-nickel
J	Steel 4130 or 4140	Zinc-nickel
P	Steel 4130 or 4140	Zinc phosphate
R	Steel 4130 or 4140	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 5
Blank	CRES	No additional finish, passivated
Blank	Titanium	Anodize
Z 1/	Steel 4130 or 4140	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 5, or ASTM B695, type II, class 5
ZN 1/	Steel 4130 or 4140	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 5, or ASTM B695, type II, class 5 with NAVAIR TCP

1/ Not for use on aircraft.

Adapter color coding reference MIL-DTL-38726.


TABLE III. Fractional length table. 1/

Fractional length designator	Length		
	Fraction	Decimal	mm
0	0	.000	0.00
1	1/8	.125	3.18
2	1/4	.250	6.35
3	3/8	.375	9.53
4	1/2	.500	12.70
5	5/8	.625	15.88
6	3/4	.750	19.05
7	7/8	.875	22.23

1/ Fractional lengths are available only in .125 inch (3.18 mm) increments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): The PIN shall consist of AN prefix, specification sheet number, hose dash size, material code, a dash number for hose length in inches and fractional length designator, material finish code, and L hose with lock wire hole and leave blank with no lock wire hole.

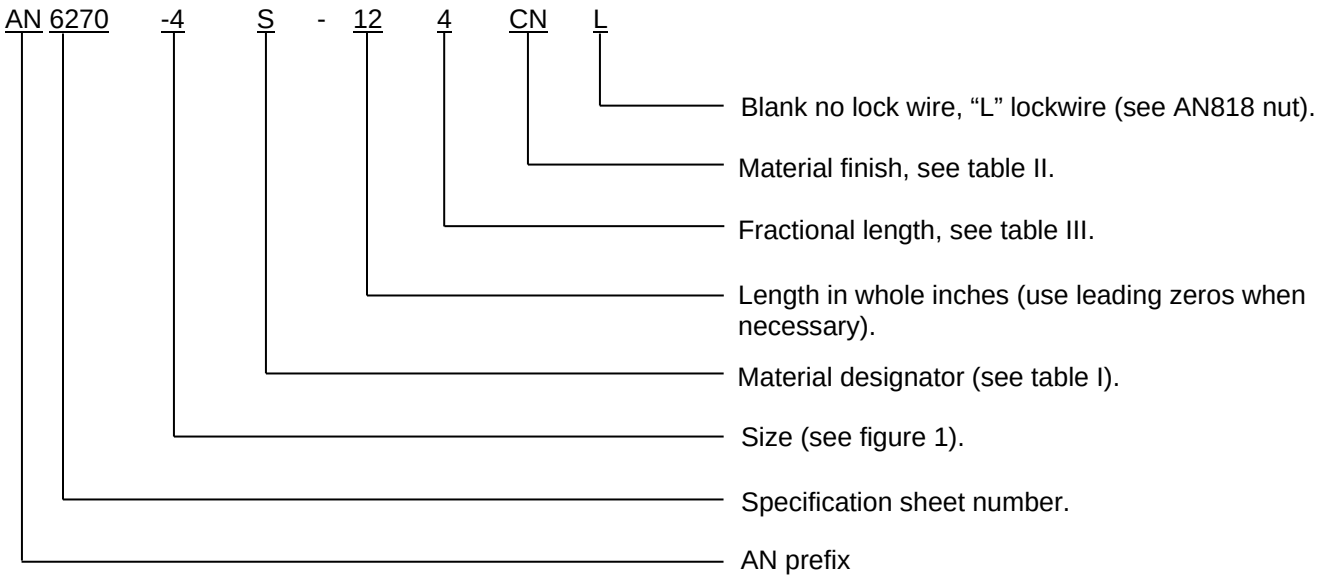

Example of PIN: AN6270-4S-124CNL indicates a hose assembly .250-inch tube to hose, 4140 steel adaptor’s, 12.5 inches long, cadmium plating with NAVAIR TCP, and lock wire holes.

The hose assembly shall be identified with the PIN on an attached tag that shall be removed upon installation.

The age of the hose assembly covered by this specification sheet and furnished for use by the Government shall not exceed the limits specified in SAE-AS1933.

NOTE: Cadmium plating is not recommended. Carbon steel material with cadmium plating shall only be used when other materials and finishes specified in this document cannot meet performance requirements.

For design feature purposes, this specification sheet takes precedence over acquisition documents referenced herein.

In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification sheet shall take precedence.

Changes from the previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.

Referenced documents. This document references the following:

AN818	ASME Y14.5M
MIL-DTL-5593	ASTM B633
MIL-DTL-38726	ASTM B695
MS27404	SAE-AS1933

CONCLUDING MATERIAL

Custodians:
Army - MI
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4720-2012-001)

Review activities:
Army - AV
Navy - MC, SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.