
FED. SUP CLASS
1650

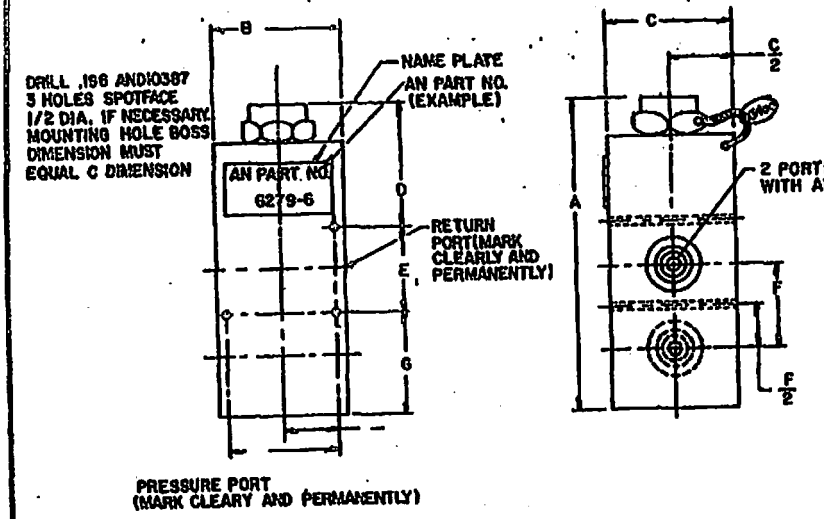

AN PART NO. PRESSURE RANGE PSI				H TUBING OD	A MAX REF	B	C	D MAX	E ±.005	F	G MAX	K ±.005	RATED FLOW GPM MIN
		100 - 1000	1000-2300	2300-3850									
		AN6279-4YZ	AN6279-4AB	AN6279-4CD	1/4	4-7/16	2-1/8	1-5/16	1-1/2	1.312	1-5/16	1. 5/8	1.750	1.2
		AN6279-6YZ	AN6279-6AB	AN6279-6CD	3/8	4-15/16	2-3/8	1-3/4	1-5/8	1.500	1-1/2	1-13/16	2.000	3.6
		AN6279-8YZ	AN6279-8AB	AN6279-8CD	1/2	5-7/8	2-3/4	1-7/8	2	1.750	1-3/4	2-1/8	2.375	6.0
		AN6279-12QZ	AN6279-12AB	AN6279-12CD	3/4	7- 1/4	3-3/8	2-5/8	2-1/4	2.125	2-1/8	2-7/8	3.250	16.0

(a)PART NUMBERS AN6279-4Y,-6Y,-8Y,-12Y,-4Z,-6Z,-8Z,-12Z CANCELED AFTER 27 AUG 1955.NO SUPERSEDING AN PART NO. FOR CONTRACTOR'S PROCURMENT ONLY, THE VALVE CRACKING PRESSURE AS A CODE NUMBERS IN POUNDS PER SQUARE INCH,MAY BE IMPRESSED ON A LEAD SEAL,OR EQUIVALENT, ATTACHED TO THE LOCKWIRE OF THE ADJUSTING NUT, IN ORDER TO INDICATE A SPECIFIED CRACKING PRESSURE. THE RELIEF VALVE NAMEPLATE AND APPLICABLE GOVERNMENT RECORDS SUCH AS PARTS CATALOGS, SPARES, DOCUMENTS, ETC, SHALL NOT CONTAIN THIS CODED NUMBER INDICATING PRESSURE SETTING. THE SERVICES SHALL NOT PROCURE OR STOCK VALVES ADJUSTED TO ANY SPECIFIC CRACKING PRESSURE. NOTATIONS ON AIRPLANE CONTRACTOR'S ASSEMBLY AND INSTALLATIONS DRAWINGS SHALL CONTAIN THE PROPER AN PART NUMBER. AS SHOWN IN ABOVE TABLE, FOLLOWED BY THE PRESSURE SETTING PARENTHETICALLY LISTED.

EXAMPLE OF PART NO. FOR GOVERNMENT USE: AN6279-6CD VALVE FOR PRESSURE RANGE 2300 TO 3850 PSI, 3/8 TUBING OD.
EXAMPLE OF PART NO. PLUS CODED PRESSURE SETTING FOR CONTRACTOR'S DRAWINGS: AN6279-6CD(3400)= VALVE FOR PRESSURE RANGE 2300 TO 3850 PSI, 3/8 TUBING OD, CRACKING PRESSURE 3400 PSI.

VALVES ADJUSTABLE TO THE RANGE OF MORE THAN ONE CLASS SHALL CARRY THE DESIGNATION OF THE LOWEST AND HIGHEST CLASS IN THE PART NUMBER: FOR EXAMPLE, A VALVE ADJUSTABLE FROM 1000 TO 3850 PSI FOR 3/8 TUBING OD WOULD BE AN6279-6 AD.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES: FRACTIONS ± 1/64.

THE AIRPLANE OR ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATION.

ACCEPTABLE PRODUCTS ARE LISTED IN QPL-5523

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE MIL-STD 32

⑥INACTIVE FOR DESIGN AFTER 6 JANUARY 1961. USE MS28887
AN6279 TO BE USED FOR REPLACEMENT OF EXISTING EQUIPMENT ONLY.

P. A.	INTERNATIONAL INTEREST	TITLE	AIR FORCE - NAVY
AIR FORCE 71 Other Cust AIR FORCE-99 NAVY - AS ARMY - AV		VALVE - HYDRAULIC PRESSURE RELIEF TWO PORT	AN 6279
PROCUREMENT SPECIFICATION: MIL-V-5523	SUPERSEDES:		SHEET OF

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 1650-0416

APPROVED 8 Sep 47 REVISED ① 17 Oct 49 ② 31 MAY 50 ③ 21 Dec 50 ④ 27 Aug 53 ⑤ 6 Jan 61 ⑥ 1 JUL 1987

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC - N/A

USER ACTIVITIES:

REVIEWER ACTIVITIES:

Source: https://assist.dla.mil -- Downloaded: 202640-26T14:23Z
Check the source to verify that this is the current version before use.