
FED. SUP CLASS
1650

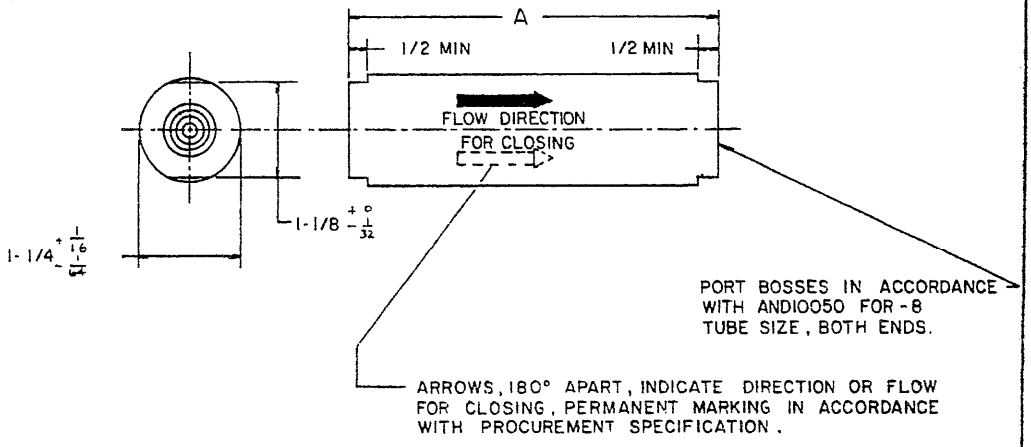

FIRST DASH NO.	TUBE OD	A ± 1/16	~~THREAD T~~	RATED VOLUMETRIC CAPACITY CU IN.
(b) ~~-4~~	~~1/4~~	~~4 13/16~~	~~7/16 20 NF 3~~	
(b) ~~-6~~	~~3/8~~	~~4 13/16~~	~~9/16 18 NF 3~~	10, 20, 40, 60, 80, 120, 160, 200, 250
-8	1/2	5 - 1/16	~~3/4 16 NF 3~~	

(a) SECOND DASH NUMBER INDICATES RATED CAPACITY IN CUBIC INCHES.

(b) PART NOS. AN6281-4 AND AN6281-6 INACTIVE FOR DESIGN AFTER 11 JULY 1951. USE AN6281-8 WITH ADAPTER.

③ FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE MIL-STD-962.
EXAMPLE OF PART NO.: AN6281-8-20 = FUSE FOR 1/2 OD TUBE WITH RATED CAPACITY OF 20 CUBIC INCHES.
DIMENSION IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTION ±1/64.

THE AIRPLANE OR ENGINE MANUFACTURERER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSION SHOWN ON THIS DRAWING FOR INSTALLATION.

TYPE I FUSE WILL RESET ITSELF WITHOUT REVERSE FLOW.

APPROVED 22 Jun 48 — REVISED ① 11 Jul 51 ② 16 DEC 52 ③ 12 JAN 87

P. A. USAF 71 Other Cust AF -99	INTERNATIONAL INTEREST	TITLE FUSE - HYDRAULIC QUANTITY MEASURING CLASS 3000 TYPE I	MILITARY STANDARD AN 6281
PROCUREMENT SPECIFICATION MIL-F-5508	SUPERSEDES:		SHEET | OF |

DD FORM 1 MAY 73 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project 1650-F144

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved by the Department of the and shall be used by that activity All other military activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:23Z
Check the source to verify that this is the current version before use.