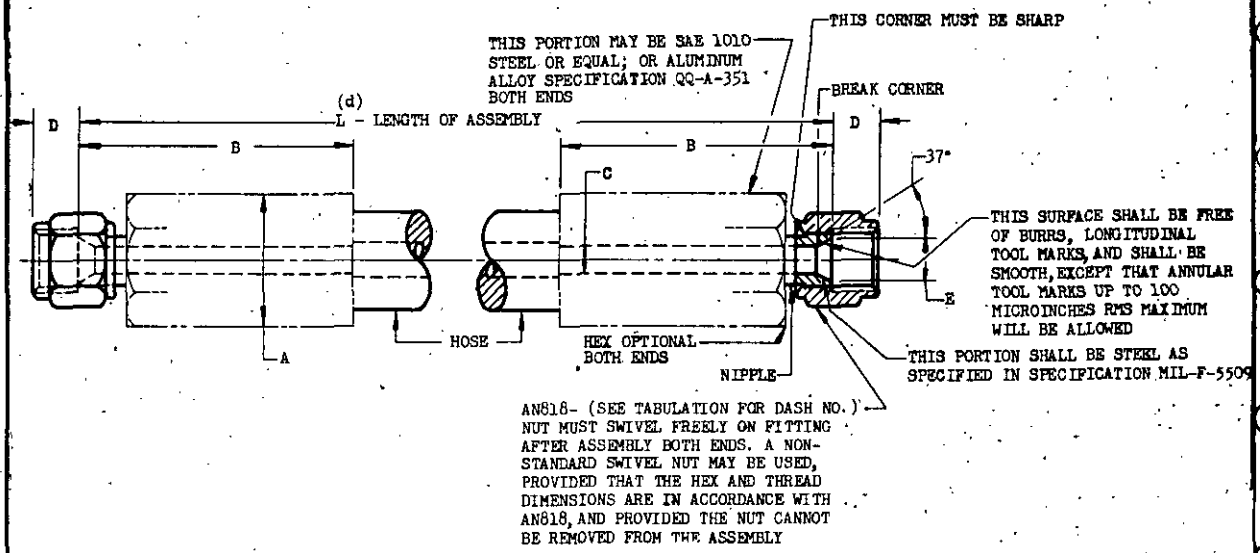


DASH NO.	TUBING OD	(c) MIN HOSE ID NOMINAL REF	(b) A MAX	(a) E +.005 -.000 DIA	C MIN DIA	D +1/64 -0	AN818	MAX WORKING PRESSURE PSI	B MAX
4	1/4	3/16	.875	.295	.146	23/64	-4	3000	2.781
5	5/16	1/4	.937	.355	.177	23/64	-5		2.656
6	3/8	5/16	1.160	.435	.271	3/8	-6		2.906
8	1/2	7/16	1.375	.570	.365	27/64	-8		3.031
10	5/8	9/16	1.550	.680	.455	1/2	-10		3.156
12	3/4	11/16	1.740	.850	.568	9/16	-12		3.672

(10) CANCELED FOR ARMY AND AIRFORCE AFTER 12 JANUARY 1965 USE MS28759.

(a) DIMENSION E OF CONICAL SEAT TO BE CONCENTRIC WITH OD OF NIPPLE WITHIN .005 TOTAL INDICATOR READING.

(b) IF HEX BODY IS USED, IT SHALL FIT STANDARD WRENCH OPENINGS.

(c) MINIMUM HOSE DIAMETER AS MANUFACTURED. SEE PROCUREMENT SPECIFICATION.

(d) TOLERANCES ON LENGTH L: ±1/8 (L UNDER 24)
±1/4 (L FROM 24 TO 36)
±1/2 (L FROM 36 TO 50)
±1% (L OVER 50)

INACTIVE FOR DESIGN AFTER 17 OCTOBER 1956. SEE DWG MS28759.

ASSEMBLY LENGTHS L AVAILABLE IN 1/2-INCH INCREMENTS UP TO 24 INCHES, IN 1-INCH INCREMENTS FROM 24 TO 36 INCHES, AND IN 2-INCH INCREMENTS FOR LENGTHS 36 INCHES AND ABOVE.

MATERIAL: SEE PROCUREMENT SPECIFICATION.

FINISH: ALL ALUMINUM-ALLOY PARTS SHALL BE ANODIZED, SPECIFICATION MIL-A-8625.
ALL STEEL PARTS SHALL BE CADMIUM PLATED, SPECIFICATION QQ-P-416, OR ZINC PLATED, SPECIFICATION QQ-Z-325.

EXAMPLE OF PART NUMBER: AN6292-8-14 - HOSE ASSEMBLY; 1/2 TUBING OD, L = 14 INCHES.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1/2°.

IF IN ASSEMBLING OR TESTING OF HOSE ASSEMBLIES, THREADS OF AN818 COUPLING NUTS BECOME SLIGHTLY DISTORTED AND FALL BELOW A CLASS 3 THREAD TOLERANCE BUT NOT BELOW A CLASS 2, THESE ASSEMBLIES WILL BE ACCEPTABLE FOR USE ON AIR FORCE AND NAVY AIRCRAFT. THIS SHALL NOT BE CONSTRUED AS ALLOWING AN818 COUPLING NUTS TO BE MANUFACTURED OR TO BE ACCEPTED BY THE HOSE ASSEMBLER WITH A THREAD TOLERANCE WIDER THAN CLASS 3.

FOR ACCEPTABLE PRODUCTS SEE QPL-5512.

REMOVABLE TAG SHOWING MS NO. AND DATE OF ASSEMBLY SHALL BE ATTACHED TO HOSE ASSEMBLY. THIS TAG SHALL BE REMOVED UPON INSTALLATION IN AIRCRAFT.

ASSEMBLIES FABRICATED FROM HOSE CONFORMING TO EITHER MIL-H-5512 OR MIL-H-8788 ARE ACCEPTABLE.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN6292
MIL-H-5512	HOSE ASSEMBLY, HYDRAULIC AND PNEUMATIC HIGH PRESSURE (3000 PSI) SWIVEL CONNECTIONS	

SUPERSEDES ANA DRAWING 6275.

Reviewers: Navy - WP

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

APPROVED 27 May 49 REVISED (1) 30 Mar 51 (2) 1 Jun 51 (3) 11 March 54 (4) 24 Mar 55 (5) 14 Sep 55 (6) 19 Mar 56 (7) 7 Sep 56 (8) 17 Oct 56 (9) 24 Jan 57 (10) 12 [illegible]

Source: https://assist.dla.mil -- Downloaded: 2020-10-26T14:25Z
Check the source to verify that this is the current version before use.