MIL-C-41822D
4 May 1978
SUPERSEDING
MIL-C-41822C
5 November 1973

MILITARY SPECIFICATION

CAP, NURSE'S, WHITE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a nurse's white, hospital duty cap in a fused construction. The cap shall be of one type and of one size.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic).
UU-P-553	-	Paper, Wrapping, Tissue.
CCC-C-437	-	Cloth, Broadcloth, Cotton Mercerized.
DDD-T-86	-	Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed).
PPP-B-636	-	Boxes, Shipping, Fiberboard.
PPP-B-676	-	Boxes, Setup.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-43548 - Thread, Polyester, Cotton-Covered.
MIL-C-43626 - Cloth, Interlining, Acetate and Cotton.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods.
FED-STD-751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), the contractor shall furnish a sample cap for first article inspection and approval (see 4.3 and 6.4).

3.3 Materials.

3.3.1 Basic material. The basic material for the caps shall be mercerized cotton broadcloth conforming to type II, class 1 of CCC-C-437.

* 3.3.2 Cloth, interlining, acetate and cotton. The interlining shall be acetate and cotton cloth conforming to MIL-C-43626, except that in preparing the samples for the acetate content test, the desizing procedure of Test Method 261 shall be used.

3.3.3 Buttons. The buttons shall be White BA, Cable 62031, conforming to type III, class E, style 5 of V-B-871, except that the button shank (including eye) shall protrude from the back of the button not less than 10 and not more than 12-1/2 lines.

3.3.4 Tape. The tape shall be white, 3/8 inch (10 mm) wide, conforming to type I, class 2 of DDD-T-86. As an alternate, a white tape made with a rayon warp and cotton filling, plain weave, minimum width of 11/32 inch (9 mm), with a minimum total of 48 single ends of ground warp, 12 two-ply selvage ends, and 96 picks per inch (38 picks/cm) of two-ply yarn in the filling may be used. The tape alternate shall weigh approximately 5.5 $\pm$ 0.5 ounces per gross yards (1.18 $\pm$ 0.11 g/m) when tested as specified in 4.4.1.

3.3.5 Thread. The thread shall be cotton-covered polyester thread, ticket numbers 50-2 or 3 ply and 70-2 ply conforming to MIL-T-43548. The color of the thread shall be White AH, C.A. 66050.

3.3.6 Instruction label. An instruction label measuring not less than 2-1/2 by 3-1/2 inches (64 by 89 mm) shall be packaged with each cap. The printing media shall be black, printed on white paper with capitals 1/8 inch (3 mm) in height and all other type 1/16 inch (2 mm) in height and shall contain the following information:

Washing instructions

Slightly soiled:

1. Clean with hand brush, soap, and warm water.
2. Rinse under faucet - DO NOT WRING.
3. Dry on towel.

Badly soiled:

1. Wash in warm soapy water.
2. Rinse and dry as above.
3. Iron with moderate iron.

NSN. 8410-00-823-7320

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

3.4 Design. The cap consists of two plies of basic material fused together with an interlining and buttoned at the back. The cap has attached tapes at inside of front and sides for purpose of securing cap to head of wearer. See figure 1.

3.5 Figure. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the specification shall control.

3.6 Patterns. A standard pattern which provides a 1/4 inch (6 mm) seam allowance will be furnished by the Government. The standard pattern shall not be altered in any way and is to be used only as a guide for cutting the contractor's working pattern. The working pattern shall be identical to the standard pattern.

3.6.1 List of pattern parts. The cap shall be cut from materials as specified below and in accordance with the pattern parts as follows:

TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Basic material, cloth, cotton, broadcloth	Cap	2 1/
Interlining material	Interlining	1 1/
	Marker	

1/ Same pattern part.

3.7 Construction.

3.7.1 Stitches, seams, and stitching. Stitch, seam, and stitching types, as specified in table II shall conform to FED-STD-751. Whenever two or more methods of seaming or stitch types are given for the same part of the operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, or puckers result.

3.7.2 Stitches per inch (stitches/cm). The minimum and maximum number of stitches per inch (stitches/cm) shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

3.7.3 Thread breaks and ends of seam. The ends of all seams and stitchings, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch (6 mm). Thread breaks shall be secured by stitching back of the break not less than 1/2 inch (13 mm).

3.7.4 Sewn eyelets. Eyelets shall finish with a 3/16 ± 1/32 inch (5 ± 1 mm) inside diameter opening. The bight (width) of stitching around the eyelet shall be not less than 1/16 inch (2 mm). The stitches shall be overlapped not less than 1/16 inch (2 mm). The stitches per eyelet shall be determined by counting the number of needle penetrations in the outside row of eyelet stitching. The overlapping stitches shall be included in the count (see figure 2).

3.7.4.1 Type 401 eyelet. On type 401 eyelets, the purling and loose thread ends shall be on the inside of the cap.

3.7.4.2 Type 502 and 503 eyelets. On types 502 and 503 eyelets, the outside purling shall be at the point of needle penetration and the inside purling shall not be pulled to the outside. The thread ends shall be on the inside of the cap.

3.8 Manufacturing operations requirements. The cap shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations.

3.8.1 Shade marking. The cut parts of the cap shall be marked, ticketed, or bundled to insure a uniform shade throughout. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on shade tickets.
(c) Adhesive type tickets, which discolor the material or leave traces of paper or adhesive on the material after removal of tickets.

* 3.8.2 Fusing conditions. The interlining cloth shall be fused to the outer layers of the basic material by the application of solvent, heat, and pressure (see operation 8 of table II) and shall show no separation of the layers when subjected to five launderings as specified in 4.4.3. The stiffness of the laminated material after five launderings shall be not less than 0.120 load pounds (0.027 N·m) in the warp direction and 0.040 load pounds (0.009 N·m) in the filling direction when tested as specified in 4.4.3. The shade of the laminated material shall be white and shall match the standard sample. Discoloration shall be not greater than that of the standard sample when tested as specified in 4.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting.						
	a. Cut the cap in strict accordance with patterns which show shape, directional lines, and placements for eyelets and tapes.						
	b. Cut the two plies of basic fabric from one piece of material. Cut the length of the cap in the warp direction.						
	c. Cut interlining in the warp direction.						
2.	Replacement of damaged parts.						
	Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as classified in 4.4.2.1 are excluded and replaced with non-defective and properly matched material.						
3.	Shade marking.						
	Mark, ticket, or bundle all component parts to insure a uniform shade and proper assembly (see 3.8.1).						
4.	Make caps.						
	a. Seam the two plies of basic material and interlining around all sides to form cap leaving a 2 to 3-inch (51 to 76 mm) opening at center bottom (concave edge) of cap for turning.	301	SSe-2(a)	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make caps. (cont'd) b. Remove thread ends and trim threads inside cap prior to turning.						
	c. Trim corners, turn, work out edges and points; turn in raw edges of the opening, and stitch 1/16 to 1/8 inch (2 to 3 mm) from edge along bottom concave of cap as shown on figure 1.	301	SSe-2(b) and SSc-1	10-14	50	50	
5.	Make eyelets. Mark and make four eyelets as indicated by marks on marker (see 3.7.4 and figure 2).	401 or		19-24 per eyelet	70	70	
		502 or		19-24 per eyelet	70	70	
		503		19-24 per eyelet	70	70	
6.	Attach tapes. a. The tapes shall be cut of sufficient length to finish 1-1/4 ± 1/8 inches (32 ± 3 mm) long.						
	b. Turn in raw edges and stitch to cap at marks indicated on marker.	304	LSd-1	16-18 1/8 inch (3 mm) throw	70	70	
7.	Clean cap. Trim all thread ends. Remove loose threads, shade tickets, spots, and stains. Note: All repairs should be made prior to fusing cap.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Fuse and crease cap. a. The laminating cloth shall be fused to the cotton broadcloth by the application of solvent, heat, and pressure (see 3.8.2). b. Crease cap in a distinct curved line as indicated by the marker pattern. The crease line shall be set so that when the cap is folded on the crease line the folded edge is smooth and even.						
9.	Attach buttons. Insert one button through the bottom eyelet and one button through the top eyelet on one side only. Thread toggles through button shank loops.						

1/ Metric equivalents for stitches per inch are as follows:

Stitches per inch	Stitches /cm
10-14	4-5-1/2
16-18	6-7

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

3.9 Finished measurements. The finished measurements shall conform to table III when cap is fused and laid flat and smooth.

TABLE III. Table of measurements

Dimensions	Inches	(mm)	Tolerance Inches	(mm)
Top length 1/	18-7/8	(479)	± 1/4	(± 6)
Bottom length 2/	17	(432)	± 1/4	(± 6)
Width 3/	7-1/8	(181)	± 1/4	(± 6)

1/ Measured straight across top from point to point.

2/ Measured across bottom in a straight line from point to point.

3/ Measured from top to bottom at center.

3.10 Workmanship. The finished caps shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required (see 6.2), the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2.1 and 4.4.2.2 for compliance with design, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material testing. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, specified testing shall be performed on component listed in table IV. Wherever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191. When the data in the "Number of Determinations per sample unit" and "Results reported as" columns are not specified, they shall be as required by the referenced test method. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The basis for lot size and sample unit for testing shall be as follows:

Component	Lot size expressed as		Sample unit for testing	
Alternate tape	Yards	(0.91 m)	4 feet	(3.7 m)

TABLE IV. Component testing

Component	Characteristic	Requirement reference	Test method	No. determinations per sample unit	Results reported as
Tape	Weave	3.3.4	Visual	1	Pass or fail
	Material identification:	3.3.4			
	Rayon warp		1500 or 1520	-	-
	Cotton filling		1200	1	Pass or fail
	Weave	3.3.4	Visual	1	Pass or fail
	Width	3.3.4	Visual 1/	1	Pass or fail
	Texture, warp, selvage, and picks)	3.3.4	5050	-	-
	Weight (ounces per gross yards)	3.3.4	5041	5	0.102/gross yds (0.01 g/m)

1/ Steel ruler capable of measuring to the nearest 1/32 inch (1 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

4.4.2 End item examination. The caps shall be examined for those defects shown in 4.4.2.1 and 4.4.2.2. The inspection levels and acceptable quality levels (AQLs) for these examinations shall be in accordance with 4.4.2.3. The sample unit shall be one finished cap.

4.4.2.1 Visual examination.

Examine	Defect
Eyelets	One or more omitted (or added). Stitching not securely caught in fabric plies, causing stitches to pull away from fabric. Eyelet finishing less than 5/32 inch (4 mm) or more than 7/32 inch (6 mm) inside diameter opening. Stitches overlapped less than 1/16 inch (2 mm). More than two skipped stitches, or one or more broken stitches in one or more eyelets. Purling of 401 type finishing on outside of cap. Outside purling of 502 or 503 type not at needle penetration or inside purling pulled to outside.
Cleanness	Any spot or stain. Any thread end not trimmed, or thread end not removed.
Components and assembly	Any component or required operation omitted (unless otherwise classified herein).
Cutting	Cap not cut with the length of the cap in the warp direction.
Material defects and damages	Any hole or weakening defect such as a smash, multiple float, or slub. Unsightly slub or shade bar. Needle chew, cut, tear, or mend.
Pressing and fusing	Burned or scorched. Edges and points not forced out prior to fusing. Fusing omitted or incomplete. Crease line omitted. Poorly pressed or fused resulting in permanent creases, friction marks, or slack fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

Examine	Defect
Seams and stitching	Any seam twisted, puckered, or pleated.
Accuracy of seaming	Any thread break stitched less than 1/2 inch (13 mm) beyond each end of break. Any end of seam or stitching, when not caught in other seam or stitching, backtacked less than 1/4 inch (6 mm).
Gage of stitching	Irregular, unevenly gaged. Less than 1/16 inch (2 mm) or more than 1/8 inch (3 mm) from edge.
Raw edges	1/8 inch (3 mm) or more.
Seam and stitch type	Not specified seam type. Not specified stitch type.
Stitch tension	Loose tension - Looper thread exposed on surface of cap.
Stitches per inch	More or less than specified.
Shaded parts	Any part badly shaded.
Tapes	One or more omitted or not length specified.
Buttons	One or more buttons or toggles missing.

4.4.2.2 Size measurements.

(a) Top length	Any measurement deviating from dimensions and tolerances specified in table III shall be scored as a defect.
(b) Bottom length	
(c) Width	

4.4.2.3 Inspection levels and AQLs. The inspection levels and the AQLs expressed in defects per 100 units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

	Inspection level	AQL
For 4.4.2.1	II	6.5
For 4.4.2.2	S-3	4.0

4.4.3 End item testing. The finished caps shall be tested as specified in table V. Wherever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191. All requirements shall be applicable to the individual sample unit. The sample unit shall be two laminated caps. The lot size and sample size shall be as specified in 4.4.1, and the lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified.

TABLE V. End item testing

End item	Characteristic	Requirement reference	Test method	No. determinations per sample unit	Results reported as
Finished cap	Lamination after five launderings	3.8.2	Visual 1/	1	Pass or fail
*	Stiffness after five launderings 1/:	3.8.2			
	- warp		5202	5	Average of 5 determinations to the nearest 0.001 load pound (0.001 N·m)
	- filling		5202	5	Average of 5 determinations to the nearest 0.001 load pound (0.001 N·m)
	Discoloration	3.3.2	5660 2/	1	Pass or fail

1/ The laminated cap shall be subjected to five complete laundering cycles in accordance with laundering procedure for cotton outlined in Test Method 5556 of FED-STD-191.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

2/ Except that exposure of the specimen and standard sample shall be for 20 standard fading hours. Any specimen showing discoloration less than or equal to that of the standard sample shall be rated "satisfactory". Any specimen showing discoloration greater than that of the standard sample shall be rated "unsatisfactory".

* 4.4.4 Packaging inspection. An examination shall be made to determine that the preservation-packaging, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Examination for the closure defects listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content (exterior and interior)	Number of interior packages per shipping container is more or less than required. Number of caps per package is more or less than required. 1/

1/ For this defect, one interior package per container in the sample shall be examined.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Twelve caps, each with the instruction label specified in 3.3.6, shall be uniformly nested and completely wrapped in two thicknesses of tissue paper conforming to type I, class 1 of UU-P-553. Each wrapped bundle of caps shall be placed full length in a paperboard box conforming to type II, variety 1, class A, style 4 of PPP-B-676. Inside dimensions of each box shall be 19-1/4 inches (489 mm) in length, 9-1/4 inches (235 mm) in width, and 4-1/4 inches (108 mm) in depth. The lid depth shall be 1-1/4 inches (32 mm). Crumpled tissue paper shall be placed under the caps and inside the wrap to prevent distortion of the preformed shape of the caps within the paperboard box. Each box shall be closed and inspected in accordance with the appendix of PPP-B-676.

5.1.2 Level C. Caps shall be preserved-packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A packing. Seventy-two caps, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A packages shall be packed flat, one in length, two in width, and three in depth within a shipping container. Inside dimensions of the shipping container shall approximate 19-3/4 inches (502 mm) in length, 19-1/4 inches (489 mm) in width, and 13-1/4 inches (337 mm) in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2 Level B packing. Seventy-two caps, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat, one in length, two in width, and three in depth within a shipping container. Inside dimensions of the shipping container shall approximate 19-3/4 inches (502 mm) in length, 19-1/4 inches (489 mm) in width, and 13-1/4 inches (337 mm) in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

* 5.2.3 Level C packing. Caps, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract, interior packages, and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The caps are intended for wear by female members of the ANC, AMSC, and Female Warrant Officers assigned duties involving direct patient care. Cmd. (civilian) nurse is also authorized the cap in USAREUR (Zone VI).

6.2 Ordering data. Procurement documents shall specify the following:

(a) Title, number, and date of this specification.
(b) When a first article sample is required (see 3.2, 4.3, and 6.4).
(c) Selection of applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Sample. For access to samples, address the procuring activity issuing invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of one finished cap. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.5 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard for Metric Practice, and are for information only. In each instance, the value stated in US customary units shall be controlling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 99

Review activities:

Army - MD
Air Force - 45
DLA - CT

User activity:


Air Force - 11

Preparing activity:

Army - GL

Project No. 8410-0315

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

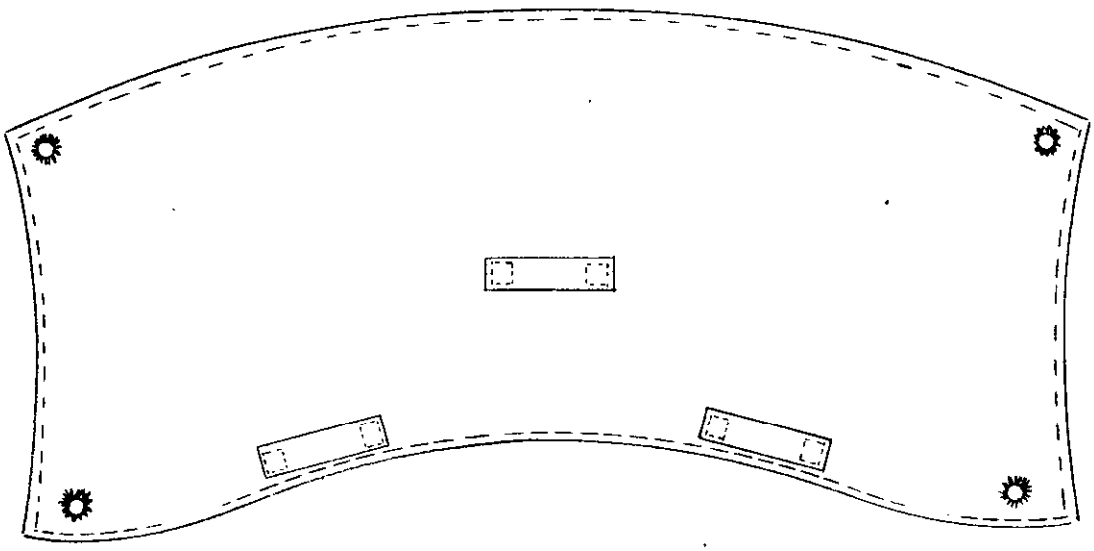


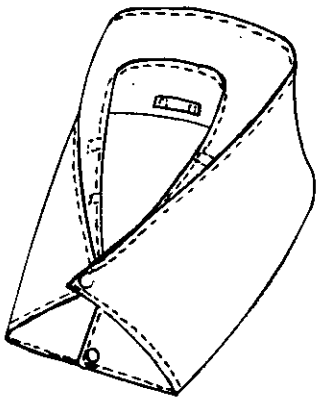


FIG 1 - CAP, NURSE'S, WHITE

2-1-355E

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

EYELET STITCH TYPE 401

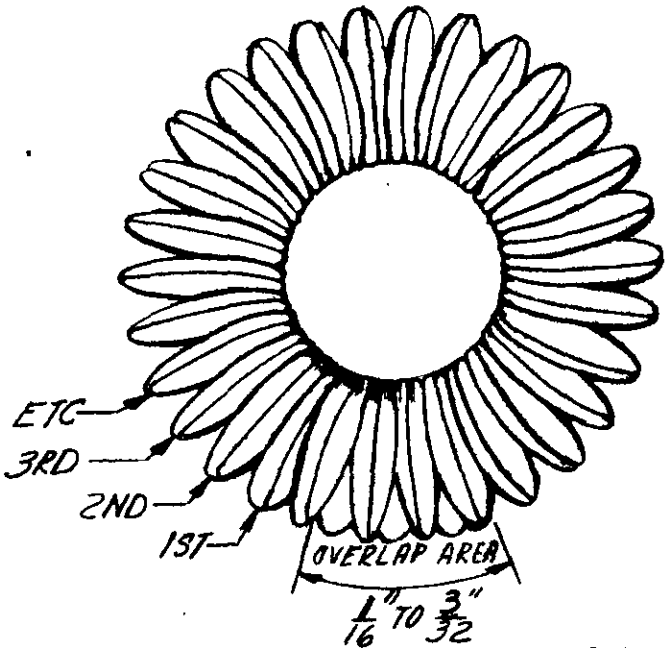

EYELET STITCH TYPE 502 OR 503

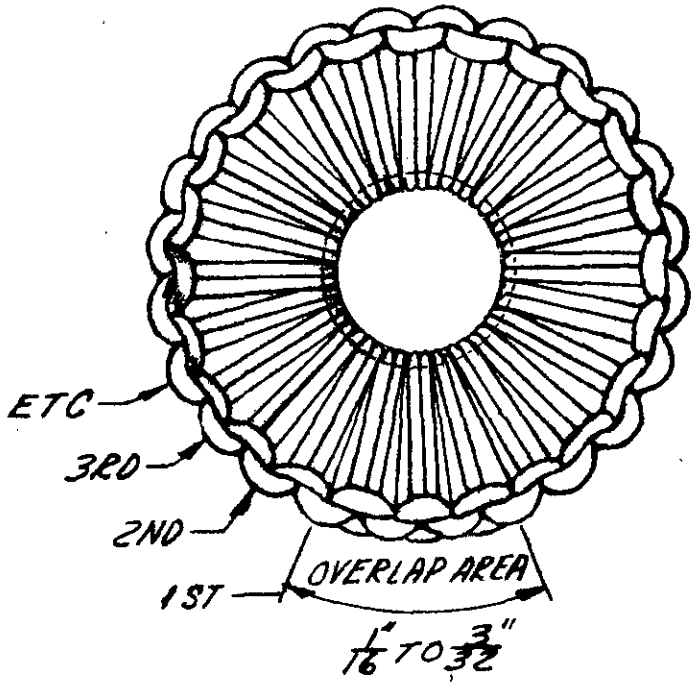


FIGURE 2. STITCHED EYELETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-MIL-C-41822D CAP, NURSE'S, WHITE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRXNM-TDC

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S.MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TDC
Natick, MA 01760

NATICK OP 1 JUL 77
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:06Z
Check the source to verify that this is the current version before use.