INCH-POUND


MIL-DTL-41819/58
2 June 2016

DETAIL SPECIFICATION SHEET

RIBBON ATTACHMENT, LETTER “C”

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-R-41819.

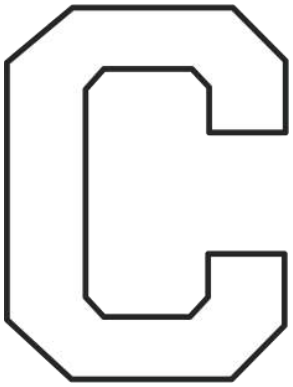

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No.C-230)


FINISH: Brass, Oxidized, Buffed Relieved and shall match The Institute of Heraldry Metal Finish Chip Number 4.

DIMENSIONS:
HEIGHT:
-1: 1/4 inch (REF)
-2: 1/8 inch (REF)
WIDTH:
-1: 1/4 inch (REF)
-2: 1/8 inch (REF)
THICKNESS:
-1: 0.052 inch $\pm$ .005 inch
-2: 0.052 inch $\pm$ .005 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:04Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

The attaching device must be a staple type prong. For -1 and -2, the prong will be located on the horizontal center line of the ribbon attachment. For -1, the prong must be fused at least 1/32 inch ± 1/64 inch from the each end of the ribbon attachment. For -2, the prong must be fused at least 1/64 inch + 1/64 inch - 0 from the each end of the ribbon attachment (see depiction below).



NOTE:

The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2016-481)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:04Z
Check the source to verify that this is the current version before use.