MIL-M-41837D
27 June 1988
SUPERSEDING
MIL-M-41837C
10 March 1983

MILITARY SPECIFICATION

MAINTENANCE KIT, TOXICOLOGICAL AGENTS PROTECTIVE CLOTHING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers one type of kit for the emergency field repair of toxicological agents protective clothing (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

UU-T-595 - Towel, Wiping, Paper: Industrial and Institutional
PPP-B-566 - Boxes, Folding, Paperboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-B-676 - Boxes, Setup
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing
PPP-T-1637 - Tubes, Shipping, Collapsible

MILITARY

MIL-C-12189 - Cloth, Coated: Butyl Coated, Toxicological Agents Protective
MIL-C-17504 - Coating Compound, Acrylic, Clear
MIL-L-35078 - Loads, Unit: Preparation of Semiperishable Subsistence Items, Clothing, Personal Equipment and Equipage; General Specification For

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets

(Copies of specifications, standards, and handbooks required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Copies should be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.3).

3.2 Components. The maintenance kit shall consist of the following components:

a. Patches (twenty-four)
b. Tube of adhesive
c. Abrasive strip
d. Paper towels (four)
e. Instruction card

3.2.1 Patches. Each patch shall be made from butyl coated cloth conforming to MIL-C-12189. The patches shall measure 1-1/2 inches ± 1/16 inch in diameter and shall be precoated with the adhesive specified in 3.2.2.1 to a dry film thickness of 2-1/2 to 5 mils. The adhesive coated side of the patch shall be covered with a release paper. The release paper shall have a central butt slit across the entire width of the release paper which may be produced after application of the release paper or may be pre-slit. There shall be no visible evidence that slitting knives have cut through the adhesive layer to the coated fabric. The release paper shall be of sufficient stiffness and release qualities as to cause complete separation of the paper from the patch at the slit area and to be free of visible adhesive residue, when tested as specified in 4.4.4.

3.2.2 Tube of adhesive. At least 25 milliliters of the adhesive specified in 3.2.2.1 shall be supplied in a collapsible tube conforming to type I, class 2, style 2 of PPP-T-1637, 7/8 inch tube size, approximately 4-3/4 inches tube length, Nos. 12 or 16 diameter orifice code, with cap and liner. The tube shall be securely closed with an imprinted crimp, or a double fold with closure sealant suitable for the contents. The tube shall be permanently and legibly labeled "Adhesive" and "Caution! Do not breathe vapors, avoid skin contact and use only in well-ventilated areas" with letters 1/8 inch minimum height.

3.2.2.1 Adhesive. The adhesive shall be of the composition listed below suitably milled, churned, and thinned to a Brookfield viscosity of approximately 400 centipoises (see 6.4). The adhesive shall be aged at least 48 hours before testing and shall be made up one month or less in advance of the assembly of the maintenance kits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

Neoprene WRT	80 parts by weight (pbw)
Neoprene WHV	20 pbw
Santovar A	1 pbw
Magnesium oxide	5 pbw
Bakelite CK 2400	40 pbw
Solvent blend (30 parts hexane, 35 parts acetone, 30 parts trichlorethylene, by volume)	Up to about 577 pbw, as required for viscosity control

3.2.3 Abrasive strip. The strip of abrasive shall be 360 mesh silicon carbide bonded to both sides of a 24 mesh backing in a waterproof grade (see 6.5). The strip shall measure 2-3/4 ± 1/16 by 1-1/2 inches ± 1/16 inch.

3.2.4 Paper towels. The paper towels shall conform to the requirements of type I, any size of UU-T-595. The towels (four in each kit) shall be folded as required to fit neatly into the container.

* 3.2.5 Instruction card. The instructions shall be clearly printed on one side of envelope grade paper 0.009 inch thick using elite type 12 pitch. The card shall measure 2-7/8 ± 1/4 by 4-3/4 inches ± 1/4 inch. After printing, the margin on all sides shall be approximately 1/4 inch and the card shall be coated on both sides with clear plastic, meeting the requirements of MIL-C-17504. The arrangement and text of instructions shall be as follows:

CAUTION: USE ADHESIVE ONLY IN WELL-VENTILATED AREA AND AVOID SKIN CONTACT

1. Clean and dry damaged area with paper towel.
2. Buff area lightly but thoroughly with abrasive strip.
3. Wipe off loose dust with paper towel.
4. Apply moderate coat of adhesive directly to buffed area and spread evenly.
5. Let adhesive dry 5 minutes (10 minutes at freezing).
6. Remove backing from patch. Press firmly in place with newly uncovered side toward buffed area.
7. Apply two patches - one on each side of damaged area.
8. In case of accidental skin contact, wash with soapy water.

Manufacturer's name
Date manufactured (month and year)
Shelf life inspection/test date (same month 1 year later and every 6 months thereafter).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

3.3 Performance of patch.

3.3.1 Resistance to creep. The average creep of each of the two sets of specimens prepared and tested as specified in 4.4.4 shall not be greater than 1/2 inch.

3.3.2 Flexibility of applied patch at low temperature. The bonded patch shall not crack, lift, or separate when tested as specified in 4.4.4.

3.4 Workmanship. The maintenance kits shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3 and tested for the characteristics specified in 4.4.4. The presence of any defect or failure to pass any test shall be cause for rejection of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Components and materials inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document. The characteristics listed in table I will be accepted on a certificate of compliance as indicated.

4.4.1.1 Certification. Components listed below shall be accepted on the basis of a contractor's certificate of compliance with the indicated requirements.

Component	Requirement	Requirement paragraph
Patch	Thickness of adhesive	3.2.1
Adhesive	Volume	3.2.2
	Formulation	3.2.2.1
Abrasive	Material	3.2.3

4.4.2 End item visual examination. The end items shall be examined for the defects listed below. The lot size shall be expressed in units of kits. The sample unit shall be one complete maintenance kit. The inspection level shall be I and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0.

Examine	Defect
General (applicable to all components)	Any component omitted or not as specified
	Any component defective
Patch	Brittle
	Tacky on noncontact side
	Any hole, cut, tear, or rip
	Backing omitted or does not completely cover contact surface of patch
	Backing not slit or not as specified
Tube, adhesive	Not type specified
	Not properly labeled
	Tube closure not as specified
	Any defect that may result in leakage of adhesive
Abrasive strip	Not as specified
	Areas on strip with no abrasive material

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

Examine	Defect
Paper towels	Not as specified
Instruction card	Incomplete, not legible, characters not as specified, card not fabricated of envelope grade paper Not correct size Card not coated with plastic as specified Card tacky due to coating

4.4.3 End item dimensional examination. The end item shall be examined for conformance to the specified dimensions for size of patch (see 3.2.1), adhesive tube (see 3.2.2), adhesive strip (see 3.2.3), paper towel (see 3.2.4), and instruction card (see 3.2.5). Any measurement deviating from the specified dimension shall be classified as a defect. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

4.4.4 End item testing. The end item containing all components shall be tested for the characteristics listed in table I. The lot size shall be expressed in units of kits. The sample unit shall be two complete kits. The sample size shall be five and shall include 1-1/2 yards of butyl coated cloth specified in 3.2.1. Failure of any of the sample units to meet any specified requirement shall be cause for rejection of the lot.

TABLE I. End item tests

Characteristic	Requirement	Test method	Number of determinations per sample unit	Results reported as pass or fail
Separation of release paper	3.2.1	4.5.3	2	X
Resistance to creep (patch):				
One hour after bonding	3.3.1	4.5.1	1	X
Three days after bonding	3.3.1	4.5.1	1	X
Flexibility at low temperature (patch)	3.3.2	4.5.2	1	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number of unit packs per intermediate container is more or less than specified 1/ Number of intermediate packs per container is more or less than specified 2/

1/ For this defect four intermediate packs from one shipping container in the sample shall be examined.

2/ For this defect one shipping container shall be examined.

* 4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection.

4.5.1 Resistance to creep.

4.5.1.1 Preparation of test specimen. Two sets of five test specimens shall be prepared as shown in figure 1 except that a double thickness of pressure-sensitive cellophane tape shall be used. For each set, the adherent test sheet shall be a swatch of butyl coated cloth conforming to MIL-C-12189. Abrade the coated cloth over the entire area where patches are to be applied, using the abrasive strip from the maintenance kit to be tested. Wipe off loose dust with a paper towel from the kit. Apply the pressure-sensitive adhesive cellophane tape as indicated on figure 1 to provide a 1/2-inch wide trough for application of adhesive from the maintenance kit tube and to provide a guide for film thickness of the adhesive. Spread the adhesive evenly in the trough with the aid of a straight edge drawn along the cellophane tapes. For each set, cut five central strips each 1/2-inch wide from five repair patches from the kit to be tested. Remove the release film from one of the 1/2-inch wide strips. Without touching the freshly exposed surface, apply the cut strip to the adhesive film in the position shown on figure 1 and press into place. The first cut strip shall be applied in this manner 2 minutes after spreading the adhesive and the remaining four strips shall be applied at 1/2-minute intervals thereafter.

4.5.1.2 One hour after bonding. After conditioning 1 hour minimum at 75° ± 5°F, suspend each test specimen of the first set as shown in figure 1 using any suitable support for securing the long end of each specimen and any suitable method of affixing 3 ounces of weight (including weight holder) to the free end of each strip. The specimens shall be so arranged as to hang vertically and freely without twist. Each weight shall be allowed to hang this way for 4 hours minimum. Then, the distance of separation of the patch strip shall be measured.

4.5.1.3 Three days after bonding. The test specimens of the second set shall be tested as described in 4.5.1.2, except that the test shall begin after the bonds have cured 3 days at 75° ± 5°F, and a 5-ounce weight shall be used in lieu of a 3-ounce weight.

4.5.2 Flexibility at low temperature. Apply a patch from a finished kit in the manner described on the instruction card to a piece of butyl coated cloth conforming to MIL-C-12189. Allow to cure 3 days at 75° ± 5°F, and then expose to a temperature of minus 40° ± 2°F for not less than 4 hours. While at this temperature bend the bonded portion, patch outward, over a 1/2-inch diameter mandrel. The specimen shall be positioned so that the leading edge of the patch is directly over the center of the mandrel. Examine the patch and adhesive for cracking, separation, and lifting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

4.5.3 Release paper test. The patch to be tested shall be manipulated with both hands so as to crack open the release paper at the slit line and to induce a peeling action on the patch from paper in the area of the slit line. No peeling or insufficient peeling to permit complete removal of the release paper by the fingers alone, without resorting to picking with the fingernail, shall constitute failure. Examine the release paper for evidence of visible adhesive residue.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packing. The components of each maintenance kit shall be neatly unit packed in a screw top paperboard spirally or convolutely wound can. The can shall be round and constructed from kraft paper lined chipboard. The minimum thickness of the body wall shall be 0.050 inch. The top of the can shall be seamed with a metal threaded ring on which a metal threaded cap is fitted. The bottom end shall be metal and secured to the can by means of a double crimp. Inside dimensions of each can shall be approximately 1-5/8 inches in diameter and 5-1/4 inches in depth.

5.1.1.2 Intermediate packing. Twelve maintenance kits, unit packed as specified in 5.1.1.1, shall be packed within an intermediate paperboard box conforming to variety 1, style III, type G, class 1, sub-class 1, group I of PPP-B-566; or type I, variety 1, class A, style 4 of PPP-B-676. Inside dimensions of each paperboard box shall be approximately 8 inches in length, 6 inches in width, and 5-3/8 inches in depth. Box closure shall be secured with 2-inch minimum width gummed paper tape conforming to type III, grade A of PPP-T-45, applied at the center of the length opening and extending along the bottom and up the sides at least 3 inches.

* 5.1.2 Commercial. The maintenance kits shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Two hundred eighty-eight maintenance kits (24 intermediate packs) preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packs shall be packed flat four in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 25-1/2 inches in length, 16-3/4 inches in width, and 16-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Two hundred eighty-eight maintenance kits (24 intermediate packs) preserved as specified in 5.1 shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat, four in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall be appproximately 25-1/2 inches in length, 16-3/4 inches in width, and 16-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

* 5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

* 5.2.3 Commercial packing. Maintenance kits, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), kits, packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 90 in accordance with the appendix of MIL-STD-147.

* 5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, intermediate packs, shipping containers, and unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

* 5.4.1 Special marking. Each unit pack, intermediate pack, shipping container, and unit load shall be marked in accordance with the applicable type II shelf-life item marking requirements specified in MIL-STD-129. The inspection/test date shall be 1 year after the date of kit is assembled and every 6 months thereafter.

5.4.2 Unit packs. Each unit pack shall have the required identification information legibly typed, printed, or stamped in black directly on a white paper label and the label securely affixed to the body of the unit package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The maintenance kit is for emergency repair of a puncture or small tear not over 3/4 inch in length in toxicological agents protective clothing. Each kit is provided with twenty-four patches, 1-1/2 inches in diameter.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. When a first article is required (see 3.1, 4.3, and 6.3).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. Type and class of unit load required (see 5.2.1).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.4 Adhesive. Ingredients for the adhesive specified in 3.2.2.1 may be obtained from the following sources:

Neoprene WRT	- E. I. DuPont de Nemours Co.
Neoprene WHV	- E. I. DuPont de Nemours Co.
Santovar A	- Monsanto Co.
Bakelite CK 2400	- Union Carbide Corp., Chemical and Plastics Div.

6.5 Abrasive. The following abrasive has been found to conform to the requirements specified in 3.2.3.

Gritcloth C-360 - Bay State Abrasives Co., Westboro, MA

* 6.6 Subject term (key word) listing.

Maintenance kit, toxicological agents protective clothing
Repair patches, emergency
Toxicological agents protective clothing

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

6.7 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

Project No. 8415-0620

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activities:

Navy - MC
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

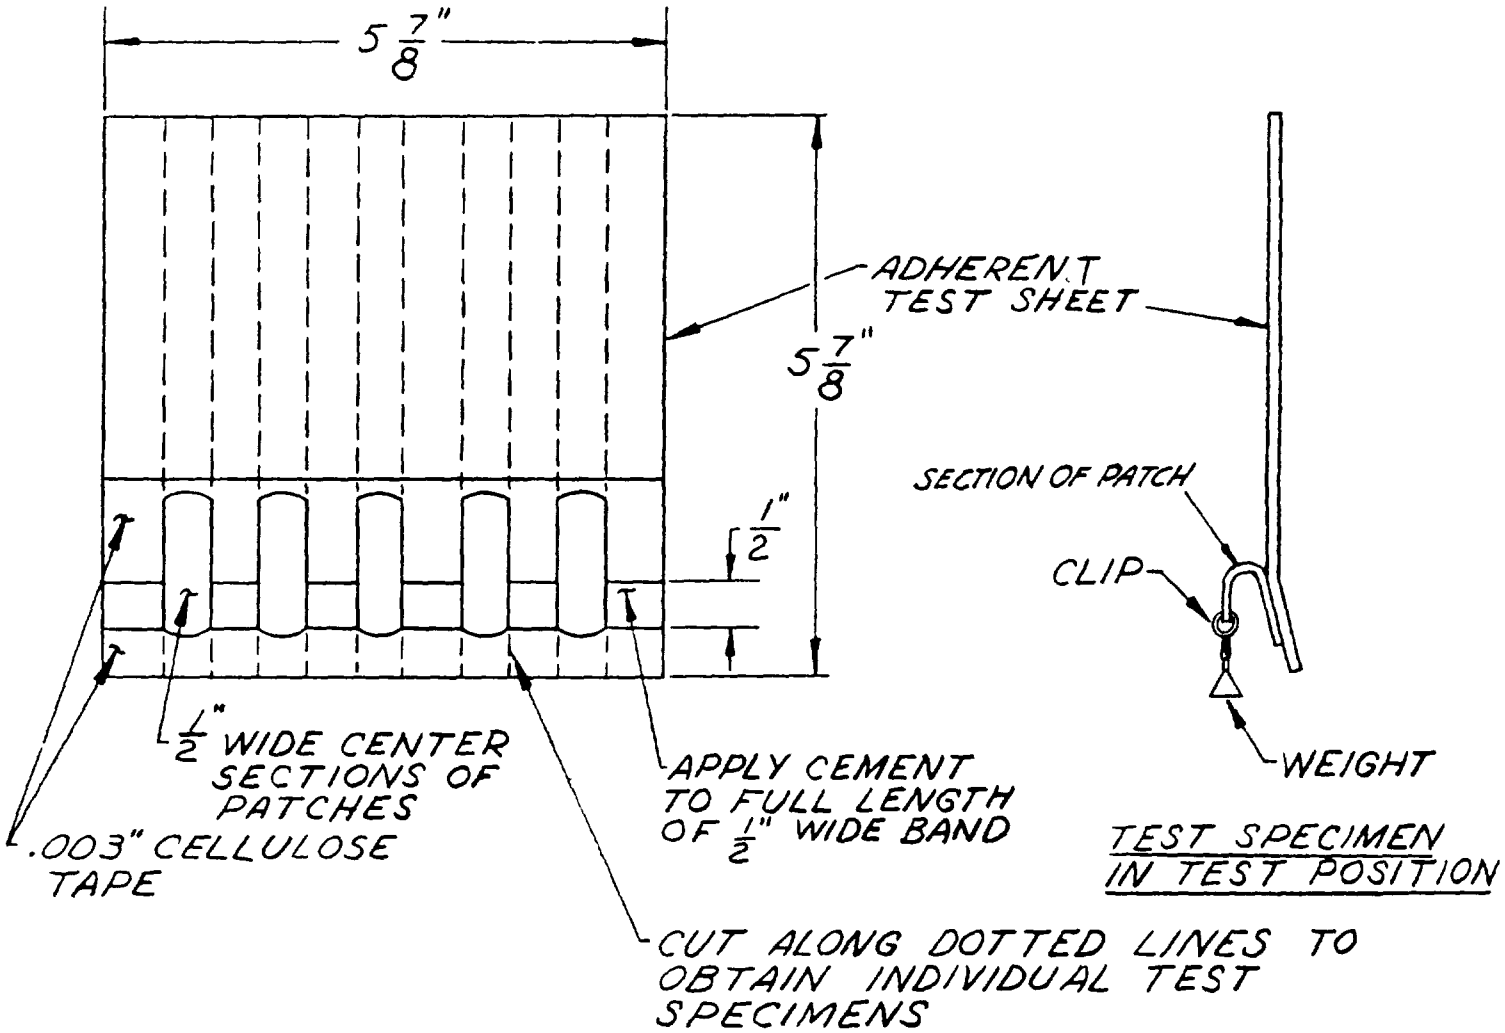


FIGURE 1. Preparation of test specimens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-M-41837D	Maintenance Kit, Toxicological Agents Protective Clothing

3a NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b ADDRESS *(Street City State ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street City State ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 32 MAR

PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (*DO NOT STAPLE*), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US Army Natick Research, Development, and
Engineering Center
Natick, MA 01760-5014

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research, Development,
and Engineering Center
ATTN: STRNC-ES
Box 14A
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:08Z
Check the source to verify that this is the current version before use.