INCH-POUND

MIL-T-41834G
16 October 1990
SUPERSEDING
MIL-T-41834F
29 May 1981

MILITARY SPECIFICATION

TROUSERS, MEN'S, POLYESTER AND COTTON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for men's trousers made of polyester and cotton blended twill fabrics in the colors as specified.

1.2 Classification. The trousers shall be of one type in the following classes, sizes, and lengths (see 6.2):

1.2.1 Classes, sizes, and lengths.

Class 3. Trousers, Polyester/Cotton, Blue 3362 (Coast Guard)

Sizes. 28, 30, 32, 34, 36, 38, 40, 42

Lengths. Short, Regular, Long, and X-Long

* Class 4. Trousers, Polyester/Cotton, Khaki 3729

Sizes. 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 42

Lengths. Short, Regular, Long, and X-Long

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, Post Office Box 59, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	- Fasteners, Slide, Interlocking
V-T-276	- Thread, Cotton
V-T-280	- Thread, Gimp, Cotton, Buttonhole
* V-T-295	- Thread, Nylon
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction 2 Way and 4 Way (Partial)
CCC-C-438	- Cloth, Buckram, Woven and Nonwoven
DDD-L-20	- Label: For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-29127	- Cloth, Twill, Polyester/Cotton (Crease Resistant Finish)
MIL-T-43548	- Thread, Polyester, Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718	- Cloth, Polyester; Polyester and Cotton; Polyester and Rayon, for Pockets
* MIL-C-43920	- Cloth Interlining, Cotton or Synthetic, and Nylon

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitching

MILITARY

* MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1448	- Provisions for Evaluating Quality of Trousers

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

* MIL-STD-2073-1 - Department of Defense Materials Procedures for Development and Application of Packaging Requirements
* MIL-STD-2073-2 - Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001)

*2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Buttons

Department of Defense Standard Shades for Sewing Threads

(Application for copies of color cards should be addressed to the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

* 3.3.1 Basic material. The material for the trousers shall be polyester/cotton twill conforming to class 1 of MIL-C-29127. The color for the class 3 trousers shall be Blue 3362, matching piece number 78349. The color for the class 4 trousers shall be Khaki 3729, matching piece number 80301.

3.3.2 Pocketing and lining. The material for the pockets, waistband lining, and right fly lining shall be twill cloth conforming to class 1 of MIL-C-43718. The color shall be Black 423 for class 3 trousers; or natural, unbleached, or white for class 4 trousers.

* 3.3.3 Waistband assembly. The waistband assembly shall be a commercial band using the materials stated in 3.3.2, 3.3.4, and 3.3.5.

3.3.4 Interlining.

* 3.3.4.1 Class 3 trousers. The material for interlining waistbands for class 3 trousers shall be a polyester or polyester/cellulose blend non-woven conforming to type IV, class 1 of CCC-C-438.

* 3.3.4.2 Class 4 trousers. The material for interlining waistbands for class 4 trousers shall be bleached or unbleached cotton buckram conforming to type II, class 1 of CCC-C-438 except the chlorine degradation requirements are not required. As an alternate, the material for interlining the waistband may be a polyester or polyester/cellulose blend non-woven material conforming to type IV, class 1 of CCC-C-438.

* 3.3.5 Waistband stabilizer. The material for the waistband stabilizer shall be interlining cloth conforming to type I of MIL-C-43920.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the currentversion before use.

3.3.6 Label.

* 3.3.6.1 Combination personal/identification/instruction label. The combination personal/identification/instruction label shall conform to type VI, classes 10 and 15 of DDD-L-20. The label shall show fastness to laundering. The inscription and format shall read as follows:

NAME:
SERVICE NO:
TROUSERS, MEN'S, POLYESTER/COTTON
FIBER CONTENT: 50% POLYESTER 50% COTTON (EXAMPLE)
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (if other than contractor)

INSTRUCTION

MACHINE WASH, WARM (120°F MAX)
USE MILD SOAP OR DETERGENT
DO NOT BLEACH OR STARCH

TUMBLE DRY, MEDIUM HEAT, REMOVE PROMPTLY
If needed, touch up with iron - Low Setting

OR

USE NAVEDTRA 414-01-45-81 FORMULA II

3.3.6.2 Size label. The size label shall conform to type IV or VI, class 2 of DDD-L-20. The inscription and format shall be as follows:

34 R (EXAMPLE)
8405-00-000-0000

NOTE: The lengths Short, Regular, Long, and X-Long may be abbreviated as S, R, L, or XL.

3.3.7 Thread.

* 3.3.7.1 Thread, covered, polyester. The cotton-covered and rayon-covered polyester core thread used for seaming and stitching the trousers shall conform to MIL-T-43548 in the following sizes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

Use	Ticket No.	Ply
Seaming and stitching	50, 70	2 or 3
Button sewing, bartacks, and buttonholes	50	2 or 3
Overedging	70	2 or 3

The polyester core, polyester-covered thread is not allowed. The color of the thread for the class 3 trouser shall be Blue AT, CA 66060 and the class 4 trouser shall be Khaki P-1, CA 66019 in accordance with the Department of Defense Standard Shades for Threads.

3.3.7.2 Automatic pocket machine. When automatic pocket machine using a 101 stitch type is used, the thread shall be type IC2, ticket No. A, 3 ply conforming to V-T-276. When an automatic pocket machine using a 301 stitch type is used, the thread shall be ticket No. 50, 2 or 3 ply conforming to MIL-T-43548. The color shall be as stated in 3.3.7.1.

* 3.3.7.3 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monocord special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2150 yards, and shall be tested for these requirements and for colorfastness (3.3.7.4) in accordance with test methods in V-T-295. The color shall be as stated in 3.3.7.1.

* 3.3.7.4 Colorfastness. The colored thread shall show fastness to light and laundering equal to or better than the standard sample. As a limit of acceptability, or when no standard sample is available, the dyed thread shall show a minimum of "good" colorfastness to light and laundering when tested as specified in MIL-T-43548, V-T-276, or V-T-295.

3.3.8 Gimp. The gimp for reinforcing buttonholes shall be a no. 8 gimp conforming to type I or II of V-T-280. The color shall be as stated in 3.3.7.1.

* 3.3.8.1 Colorfastness. The colored gimp shall show fastness to laundering equal to or better than the standard sample. As a limit of acceptability, or when no standard sample is available, the colored gimp shall show a minimum of "good" colorfastness to laundering when tested as specified in V-T-280.

* 3.3.9 Buttons. The buttons for the left hip pocket shall be type II, class D, style 4, 22-ligne conforming to V-B-871. The color of the buttons for the class 3 trouser shall be Black BT, Cable 62001 and the class 4 trouser shall be Khaki AL, Cable 62026 in accordance with the Department of Defense Standard Shades for Buttons.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

* 3.3.10 Slide fastener. The slide fastener shall be type I, style 1, cam lock, size LM, short tab pull, brass conforming to V-F-106, except that the salt spray test shall not apply. All metal components of the slide fastener shall be brass except for semi-automatic pin lock cover and spring, which shall be stainless steel (see 4.4.1). Also, all components shall be from the same supplier (see 4.4.1). A staple bottom stop is required. The color of the tape shall be shade Black G, Cable No. 66507 for class 3 trousers and shade Khaki P, Cable No. 66516 for class 4 trousers. The tape shall show fastness to laundering equal to or better than the standard sample. As a limit of acceptability, or when no standard sample is available, the tape shall show a minimum of "good" colorfastness to laundering when tested as specified in V-F-106.

3.3.11 Hook and eye. The hook and eye for the waistband shall be North and Judd (Hook Flex H-49 and E-50), Universal Button Co. (Talon #7, #8 hook and #8 eye or #85 eye), Patwin Inc., (Slim-Slack with MB eye) (see 4.4.1), or equal. The finish of both components shall be nickel plate. Prior to the use of the "or equal" item, the contractor shall submit the item to the contracting officer with supporting data for approval (see 6.4).

* 3.4 Design. The trousers shall be of single needle construction with separate interlined waistband, front slide fastener fly, straight side pockets, uncut darts, unhemmed bottom, seat seam outlet, and button and buttonhole closure on the left hip pocket.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification. Government patterns have a seam allowance of 3/8 inch for all seams except 1/2 inch allowance for seat seams, inseams, and outseams (see 6.3). An additional 3/4 inch has been added to the seat allowances (total 1-1/8 inches at top) to allow for tapering the seat outlet.

* 3.5.1 List of pattern parts. The trousers shall be cut from materials as specified, in accordance with the pattern parts indicated in Table I.

Table I - List of pattern parts

Material	Nomenclature of pattern parts	Cut parts
Basic material	Front	2
	Back	2
	Side pocket bearer	2
	Side pocket facing	2
	Hip pocket bearer/facing	4
	Waistband	2
	Right fly	1
	Left fly facing	1
	Left fly interlining	1

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:07Z
Check the source to verify that this is the current version before use.

Material	Nomenclature of pattern parts	Cut parts
Twill cloth	Side pocket	2
	Hip pocket	2
	Right fly lining	1

3.6 Construction.

* 3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation any one may be used. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the trousers. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitching, except for inseams and outseams for which a chain shall extend 1/4 to 3/8 inch long. Top stitching and edge stitching shall be 1/16 to 1/8 inch from the edge. Buttonholes shall be clean cut and the stitching shall be securely caught in the fabric. The use of a trimming knife in the overedging of the right fly in operations 4d and 7b is prohibited. The bight of the overedge stitching shall be 3/16 inch. The guide and knife shall be set to trim only the ravelled ends of the fabric. Double needle stitching shall be 1/4 (±1/16) inch gauge, with the outer row of stitching 1/16 to 1/8 inch from the finished edge. Bartacks shall be 3/8 to 1/2 inch long and the width shall be 1/8 (±1/32) inch.

* 3.6.2 Thread breaks and end of seams. End of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch type) shall be repaired by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked. A seat seam shall be completely resewn.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.6.4 Buttonholes. Buttonholes shall be eyelet-end, taper-bar type, worked over gimp with the end securely tacked. The finished cut length shall be 5/8 to 3/4 inch. The bar end of the taper-bar type buttonhole shall have a minimum of four tacks not including the first cross-over stitch. The purling shall finish toward the outside of the trousers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

* 3.7 Manufacturing operations requirements. The trousers shall be manufactured in accordance with all operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations provided the finished trousers are identical to that produced by following the sequence listed in Table II. Any additional basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished trousers. Minor modifications are permitted where necessary when using automatic equiptment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification.

3.7.1 Pressing. All pressing specified in Table II shall be accomplished with a heated pressing iron or machine.

3.7.2 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures or illustrations, the written specification shall control.

3.7.3 Shade and size marking. The cut parts of the trousers shall be marked or ticketed to insure a uniform shade and size throughout the trousers. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on type tickets.
(c) Adhesive type tickets which leave traces of paper or adhesive on the material after removal of the tickets.

3.7.4 Abbreviations in table of operations. The abbreviations used in Table II are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
1.	Cutting trousers.					
	a. Cut trousers in accordance with patterns furnished which show size, placement of pockets, directional lines, and notches for proper assembly of all parts. Directional lines shall be placed in the warp direction. The directional lines may vary from the warp direction by not more than 1 inch on both fronts and backs. Measurement shall be taken at the top and bottom edges of the directional line on pattern to the selvage edge of the fabric and the difference between the two measurements shall not exceed 1 inch.					
	NOTE: For class 3 trousers, all parts of the trousers shall be cut in the same direction.					
*	b. Cut all basic material parts of the trousers out of the same piece of material, except right fly, left fly facing, left fly interlining, side pocket facing, hip pocket bearer/facing, and belt loops, which may be cut from ends. Parts cut from ends shall approximate the shade of the trousers.					
	c. The belt loops shall be cut of sufficient width to comply with operation 13.					
	NOTE: The cut width of the belt loops will vary depending on which option of operation 13 is used.					
	d. Cut the waistband lining, waistband interlining and right fly lining parts on the bias. The waistband lining and waistband interlining shall be cut of sufficient length and width to comply with operation 14.					
*	e. Cut the waistband stabilizer of sufficient length to comply with operation 14.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	* NOTE: The waistband lining shall be a commercial type using the lining, interlining and waistband stabilizer materials specified in 3.3.3.					
	f. Cut pockets in the warp direction.					
	* g. The selvage shall not appear on the outside of the trousers.					
2.	Replacement of damaged components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1488 shall be removed from production and replaced with non-defective and properly matched components.					
*3.	Marking (see 3.7.3). All parts shall be marked or ticketed to assure a uniform shade, size, and proper assembly throughout the item. Parts cut from ends need not be marked or ticketed, however, they shall approximate the main assembly.					
*4.	Overedge stitching. a. Overedge the seam allowance of inseam, outseam from lower side pocket notch to bottom of trousers, crotch seam, and right front edge of foreparts.	503 or 504 or 602	EFd-1	8-10	70	70
	b. Overedge the seam allowance of inseam, outseam, and seat seam of back parts.	503 or 504 or 602	EFd-1	8-10	70	70
	c. Overedge the left end of the waistband.	503 or 504 or 602	EFd-1	8-10	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	d. Overedge the top and bottom edges of front and back parts and the back edge of right fly. OR The back edge of the right fly may be overedged to the slide fastener tape (see operation 7b). NOTE: Overedging the right fly is to be performed without the use of a trimming knife. When a knife is allowed on a serging machine, the gauge shall be set so that the raveled ends are trimmed but the edge of the fabric is not cut off.	503 or 504 or 602	EFd-1	8-10	70	70
5.	Make side pockets and attach combination personal/identification/instruction label.					
	a. Place bearer 3/4 inch below the top edge of the front pocket and in line with the side seam. Stitch along the inner side, with the raw edge turned in, and across lower end (figure 2, illustration A). A selvage edge need not be turned in.	301	LSd-1 & LSbj-1	10-14	50	50
	b. Locate the facing 1-3/4 inches below the step on the front pocket and in line with the pocket opening. Stitch along the inner side, with the raw edge turned in, and across lower end (figure 2, illustration A). A selvage edge need not be turned in.	301	LSd-1 & LSbj-1	10-14	50	50
	c. Stitch the combination personal/ identification/instruction label (see 3.3.6.1) on four sides to the underside of the right pocket on the bottom side of the material facing the wearer. Stitching shall not be through the printing.	301	LSbj-1	10-14	50	50
6.	Attach side pockets. Finished appearance - The edges of the pocket openings shall not be distorted. The openings shall be aligned, uniform in length, and shall measure not less than 6 nor more than 6 1/2 inches between tacks. Avoid notching the pocket on underside beyond the width of the side seam allowance.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	a. Seam pockets to fronts as indicated by marks on pattern; notch for pocket openings; turn to finished position with the seam to back of the front edge and stitch 3/16 to 1/4 inch from edge (figure 2, illustration B and C).	301	SSe-2	10-14	50	50
	b. Fold pocket right-side-out and seam raw edges from step to folded edge of pocketing. Notch pocket and facing at top of step and turn pocket (figure 2, illustration D and E).	301 or 401	SSe-2(a)	10-14	50 50	50 70
	c. Tack ends of the opening to the bearer with a 1/4 to 3/8 inch tack. The right and left pocket openings shall not be out of alignment by more than 1/2 inch (figure 2, illustration F).	301		10-14	50	50
7.	Make flies.					
	a. Double stitch back edge of the slide fastener tape to left fly facing through fly interlining. The edge of the chain shall be 1/2 to 5/8 inch from the front edge on the finished fly at the top, tapering to 1/4 to 3/8 inch at bottom with the bottom ends of scoops not more than 1/2 inch above the fly notch, when the slide fasteners are cut and scoops removed (figure 3, illustration A).	301 or 401	SSau-2	10-14	50 50	50 70
	b. Seam slide fastener tape to back edge of right fly, with the bottom end of scoops not more than 1/2 inch above the fly notch, after slide fasteners are cut and scoops removed (figure 3, illustration B). As an alternate, it may be overedged (see operation 4d) but a trimming knife is not permitted.	301 or 503 or 504	SSa-1	10-14	50 70 70	50 70 70
	c. The right fly shall be one thickness of the basic material and lined with twill cloth.					
	d. Seam the right fly lining to the front edge of the right fly to within 1 (+1/4) inch from top of fly; turn and stitch 1/16 to 1/8 inch from edge (figure 3, illustration C and D).	301 or 401 & 301	SSe-2(a) SSe-2(b)	10-14 10-14	50 50 50	50 70 50

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	e. Overedge the back edge of the left fly facing and left fly interlining together (figure 3, illustration E).	503 or 504 or 602	SSa-1	8-10	70	70
8.	Sew on right and left flies.					
	a. Sew on right fly with notches matching, catching slide fastener tape in the seam (figure 3, illustration F).	301	SSa-1	10-14	50	50
	b. The end of the right fly lining shall extend beyond inseam not less than 1/2 inch.					
	c. Sew on left fly with notches matching (figure 3, illustration G).	301	SSa-1	10-14	50	50
	d. Turn left fly to inside with seam 1/16 to 1/8 inch back of folded edge and press front edge flat without damage to slide fastener chain (figure 3, illustration H).					
	e. Right fly seam may be pressed open and flat with the slide fastener tape facing the side seam.					
9.	Make darts. Finished appearance. The darts shall be folded, not cut, and carefully tapered off and properly pressed. The lower end of the dart shall finish in the hip pocket opening. The folds of both darts shall face either the side seams or the seat seam.					
	a. Fold darts on back as indicated on patterns and stitch full length of dart. Press darts smooth and flat. Darts may be stitched across top to the trousers prior to attaching waistband.	301	OSf-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*10.	Make hip pockets. Finished appearance. The pockets shall be uniform in width and shall finish 5-3/4 to 6-1/4 inches deep. Ends of openings where the bearer/facings are turned shall be neatly finished without raw edges or pleats. The right and left pockets shall be in alignment. The top of pocketing shall extend not less than 1/2 inch into the waistband and be caught in the bottom stitching of the waistband.					
	a. Turn in lower raw edge of pocket bearer/facing piece and seam to pocket at notches as indicated on patterns. When facing is cut on selvage, the edge need not be turned in (figure 4, illustration A).	301	LSd-1	10-14	50	50
	b. Position bearer/facing piece as indicated by patterns and seam to trousers through pocket on the underside with two rows of stitching (figure 4, illustration B).	301	SSv-2	10-14	50	50
	c. Cut opening through bearer/facing, trouser, and pockets. Turn bearer/facing through opening and raise stitch, forming a 1/8 to 3/16 inch welt on lower edge of opening (figure 4, illustrations C, D, and E).	301	SSe-2 shows finished seam	10-14	50	50
	d. Turn in raw edge of bearer/facing piece and seam to pocket. When bearer/facing piece is cut with selvage, the edge need not be turned in (figure 4, illustration D).	301	LSd-1	10-14	50	50
	e. Fold pocket right side out and stitch side edges (figure 4, illustration F).	301 or 401	SSe-2(a)	10-14	50 50	50 70
	f. Turn out pocket and single stitch sides 3/16 to 1/4 inch from edges. Stitching may extend across bottom folded edge of pocket. The ends of the bearer/facing piece shall be caught in the edge stitching only (figure 4, illustration G).	301	SSe-2(b)	10-14	50	50
	g. Form a 1/8 to 3/16 inch welt of the bearer/facing on upper edge of pocket opening and raise stitch the seam through trouser, bearer/facing pieces, and pocket, closing top of pocket (figure 4, illustration H).	301	SSbe-2	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	h. Tack ends of pocket opening through welt, bearer/facing, and pocket.	301		10-14	50	50
	OR					
	i. Operations 10b and 10c may be accomplished with a double welt pocket machine which stitches, cuts, and turns welt edges in one operation. When this machine is used, the hip pocket bearer/facing piece may be trimmed to permit insertion into the machine, and the recommended pocket stay material may be used. The joining seam of the bottom welt shall be raised stitched through back and welt and the joining seam of the top welt shall be raised stitched through all plies in the closing of the top of pocket. Ends of pocket opening shall be securely tacked.	101 and 301		10-14 10-14	A 50	 50
11.	Join outseams. Finished appearance. The outseams shall be joined with notches matching, without twists, puckers, pleats, or raw edges. The seams shall start and finish evenly. Be sure not to close pocket opening when joining front and back outseams.					
	a. Join outseam with notches matching. Press outseams open and flat.	301 or 401	SSa-1	10-14	30 30	30 50
12.	Finish side pockets.					
	a. Turn in back edge of pocket and stitch to seam allowance of back parts. Continue stitching pocket to folded edge at bottom of pocket 3/16 to 1/4 inch from edge (figure 2, illustration G).	301	SSb-1 and SSe-2(b)	10-14	50	50
	b. Upper portion of pockets shall extend into the waistband, finish smooth, and be flat and sewn to the seam allowance of waistband and trousers.					
13.	Make belt loops (see operation 1c). Finished appearance. The finished loops shall measure 5/8 to 3/4 inch wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	a. Make loops by folding a piece of the basic material to center with the edges abutted and double stitch not less than 1/4 inch gauge with a covering stitch on the underside.	406	EFh-1	10-14	50	50
	OR					
	b. Seam loop pieces, turn, smooth out, and flatten. The seam shall not be exposed on the side edge of the loop.	301	EFu-1	10-14	50	50
	OR					
	c. Make loops by abutting folded edges and stitch with the line of stitching covering the abutted edges. The stitching shall not show through to the outside.	105	EFae-1	10-14	50	
*14.	Make waistband lining. Finished appearance. The waistband lining shall be a commercial type using the requirements stated in 3.3.3. The waistband lining shall measure 2 (+1/8) inches wide in the finished trousers. The waistband lining may be pieced providing the seam is flat and there is not more than one piecing on each trouser. The waistband stabilizer may be 1 inch shorter than the waistband lining at the seat seam and may be inserted during the joining of the waistband and waistband lining.					
*	a. Overlap the lining on the interlining 3/4 inch and stitch 1/8 to 3/16 inch from edge of lining. Position waistband stabilizer to opposite remaining edge of interlining and stitch 1/2 inch from edge. Fold lining over interlining and press.	101 or 301 or 401	LSa-1	10-14	50 50 50	 50 70
	OR					
	The waistband stabilizer may be inserted during the joining of the waistband and waistband lining (see operation 16c).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
15.	Set belt loops and seam waistband. Finished appearance. The waistband shall finish smooth and flat without fullness, gathers, or pleats. The waistband shall have the belt loops positioned with the ends (except the center back loop) inserted not less than 1/2 inch at bottom of waistband and caught in the stitching. The belt loops, when finished, shall be smooth and flat, and the waistband shall finish 1-1/2 ((±1/8) inches wide. NOTE: Class 4 shall have dropped belt loops. a. There shall be seven loops for sizes up to and including size 37, and eight loops for size 38 and above. The loops shall be positioned as follows: (1) One on each front with center of loop positioned in accordance with notches on pattern. (2) One adjacent to each side seam on backs of trousers. (3) One centered on each back part of trousers. (4) One on waistband with center of loop aligned with seat seam (see operations 23a and 23b). (5) The extra loop for larger sizes shall be positioned on right front 1-1/4 to 1-3/4 inches from right fly joining seam.					
*	b. Seam bottom edge of waistband to top edge of trousers. The left end of the waistband shall be overedge stitched and even with the back edge of the left fly.	301 or 401 and 502 or 503	SSa-1 EFd-1	10-14 6-10	50 50 70	50 70 70
*	c. Stitch the top edge of the size label to the lower edge of the waistband lining above the right hip dart. The ends of the stitching need not be tacked provided the stitching extends at least 1/2 inch beyond each end of the label. The stitching shall not be through the printing.	301	LSbj-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
16.	Seam waistband and waistband lining. Finished appearance. The hook and eye shall be attached to the waistband so that when both parts are engaged, the closure shall not bulge, twist, pucker, or be distorted.					
	a. Seam top edge of waistband lining to top edge of waistband (left side) with the end of the lining even with the seam joining left fly to trouser.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Seam top edge of waistband lining to top edge of waistband (right side) with the end of fly lining turned back and caught in the seaming and with the stitching continued across the end of the waistband, catching the right fly lining.	301 or 401	SSa-1	10-14	50 50	50 70
	OR					
	c. As an alternate to operations 16a and 16b, join waistband lining to waistband by inserting the top edge of the waistband between the waistband lining and the interlining with the top edge of the lining turned in. Position stabilizer behind and seam with a row of imitation hand felled stitching. The stitching shall continue across the end of the waistband, catching the right fly lining.	404	LSb-1 except interlining shall be on the underside	10-14	50	50
	d. Attach the hook through left waistband at center (1/4 inch tolerance permitted) with the rolled edge of hook aligned with slide fastener scoops. Attach through a suitable reinforcement.					
	e. Attach the eye through right waistband at center and aligned with slide fastener scoops, to correspond with hook on left waistband. Attach through a suitable reinforcement.					
	f. Turn back end of waistband in line with the front folded edge of left fly and stitch across top of waistband the width of fly.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	g. Trim corners of waistband at right and left flies, turn and work out points.					
	NOTE: A machine that automatically attaches the hooks and eyes, and feeds reinforcement pieces may be used.					
17.	Finished right and left flies. Finished appearance. The top corner of the right fly shall be neatly and completely forced out. The right fly lining shall lie smooth and flat without pleats. Top of the left fly shall finish smooth and flat. The finished seaming of the left fly shall be uniform in width and the fly smooth and flat, without gathers or pleats with the joining seam not exposed on outside of finished trousers. The base of the fly shall be so finished as to avoid twisting, pleating, or puckering. The crotch and seat seams shall be spread open when the right fly lining is stitched (see Figure 5, illustration C).					
	a. Smooth out the right fly lining and edge stitch 1/16 to 1/8 inch from front edge. Continue stitching across top edge of waistband to back edge of fly lining (figure 5, illustration A).	301	SSe-2 shows finished seam	10-14	50	50
	b. Turn in back edge of right fly lining and raise stitch seam of fly through front, fastener tape, and fly lining with stitching continued to top of waistband. The finished edge stitching shall be 1/16 to 1/8 inch from the back edge of the slide fastener scoops (figure 5, illustration A).	301	LSq-2 shows finished seam	10-14	50	50
	c. Smooth out left fly with the front joining seam 1/16 to 1/8 inch back of the folded edge of forepart and seam the back edge through front, interlining, and fly, 1-5/8 (±1/8) inches from front edge with stitching continued to top of waistband (figure 5, illustration B).	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
18.	Join inseams. Finished appearance. The inseam shall be carefully joined to avoid twisting and puckering. The seams shall start and finish evenly. The crotch and seat seams shall not be staggered more than 3/8 inch.					
	a. Join the inseams with notches matching, as indicated on patterns.	301 or 401	SSa-1	10-14	30 30	30 50
	b. Press inseams open and flat.					
19.	Join and measure seat seam. Finished appearance. The seat seam shall be joined with proper tension resulting in sufficient elasticity of seam to meet strain encountered in sitting or stooping. The waist shall be measured before seat seam is joined to assure correct waist size. The base of the left fly shall cover the right fly on outside when finished.					
	a. Join the seat seam with a double needle seat seamer, with the two rows of stitching 1/64 to 1/32 inch apart, from base of fly and continue the stitching completely across waistband lining. The inseams shall not be out of alignment by more than 3/8 inch.	401	SSa-2	8-10 each ndl	30	50
	b. Press open the seat seam from fly tack including waistband lining.					
20.	Finished waistband. Finished appearance. The waistband shall finish smooth and flat without fullness, gathers, or pleats. The waistband shall finish 1-1/2 (±1/8) inches wide. The linings shall be smooth without twisting, pleating, and puckering. The lining shall not be exposed beyond the top of waistband.					
*	a. Turn seam allowance toward waistband and raise stitch waistband 1/16 to 1/8 inch from waistband joining seam, through waistband, waistband lining, and top of pockets properly positioned and smooth. The stitching shall extend to, but not beyond, the back edge of right and left flies.	301	LSq-2 shows finished seam	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
21.	Assemble slide fastener. Finished appearance. The slide fastener shall be assembled so the ends of the chain are even. Attach slider and staple bottom of slide fastener together.					
22.	Stitch right fly extension piece. a. Spread crotch and seat seams open, and turn in raw edges of right fly lining extension piece and seam to each side of seam allowance (figure 5, illustration C).	301	SSac-3 (b) (c) (d)	10-14	50	50
23.	Finish belt loop attachment. a. Turn up belt loops, turn under the top end, and align the folded top end with top edge of waistband. Stitch or bartack the belt loops 1/8 inch below folded top end of loops. The stitching or bartack shall extend the width of the loops. The belt loop opening, from stitching or bartack at top end to bottom folded end of loop shall measure 1-1/2 to 1-5/8 inches.	301 or brtck	LSd-1	10-14	50	50
				21-28 per brtck	50	50
		or automatic loop tacker		24-28 tack	50	50
	b. Set center back loop.					
	(1) Applicable to class 3:					
	(a) Turn in top and bottom edges of loop and center it over the seat seam with the top folded edge in line with the top edge of waist and bartack top and bottom ends of loop 1/16 to 1/8 inch from turned edges. The belt loop opening shall finish 1-1/2 to 1-5/8 inches in length measured from bartack to bartack.	Brtck		28 per brtck	50	50
	OR					
	(b) Position one end of belt loop over seat seam with the end of loop overlapping waistband 1/4 to 3/8 inch and bartack loop to waistband 1/16 to 1/8 inch from raw end of loop. Turn loop to finished position with the top folded edge even (±1/8 inch tolerance) with top edge of waistband and bartack 1/8 inch from folded edge. The belt loop opening shall finish 1-1/2 to 1-5/8 inches in length.	Brtck		28 per brtck	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	(2) Applicable to class 4.					
	(a) Lap the center back loop on the waistband joining seam, with the underside of loop facing up and with the raw end positioned at the vertical center of the waistband joining seam. Stitch or bartack the loop across the width 3/16 to 1/4 inch from the end.	301 or brtck	LSa-1	10-14	50	50
				21-28 per brtck	50	50
		or automatic loop tacker		24-28 per tack		
	(b) Turn loop up, align folded end with upper edge of waistband. Turn under raw lower end and stitch or bartack loop to trousers 1/4 (±1/8) inch below seam joining waistband to trouser, catching turned under portion of loop in the stitching. The belt loop opening from top folded end to stitching or bartack at bottom end of the loop shall measure 1-1/2 to 1-5/8 inches.	301 or Brtck	LSd-1	10-14	50	50
				21-28	50	50
		or automatic loop tacker		24-28 per tack	50	50
24.	Bartacking. Finished appearance. The bartacks shall be well made and correctly positioned to reinforce points of strain. All bartacks on pockets and at base of fly shall be made by machine and shall be 3/8 to 1/2 inch long.					
	a. Bartack trousers as follows:	brtck		28 per brtck	50	50
	(1) All pockets at the ends of opening. The bartacks shall be perpendicular to the opening across the seam and catch the pocketing.					
	(2) Base of fly at the junction of the crotch seam and fly in line with the left fly stitching; or the bartack may be horizontal (figure 5, illustration D).					

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
25.	Make buttonholes. Make a vertical buttonhole in the center of left hip pocket with the inside edge of eyelet 3/16 to 5/16 inch below the joining seam of welt edge.	btnhl		52-54 per btnhl incl tack	50	50
26.	Sew on buttons. Finished appearance. Button position shall be marked or gauged, and properly aligned with buttonhole. All buttons shall be positioned to effect a secure, smooth, and complete closure without bulging.					
	a. Attach one button on the bearer of the left hip pocket through all plies to correspond with buttonhole in pocket.	101		14-16 per button	50	
		or 301		14-16 per button	50	50
27.	Cleaning. a. Trim all ends of stitching and remove loose threads.					
	b. Remove all spots, stains, and marking tickets.					
	c. Close the fly slide fastener and engage hook and eye in the waistband.					
	* NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.					
28.	Pressing. Press the tops, including fly, smooth and crease the legs in the center with the seam matching at the bottom and in the crotch. The inseam in the crotch may be slightly back of the outside seam.					

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:07Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. The class 3 and 4 finished trouser shall conform to the measurements shown in Table III.

Table III - Sizes and measurements

Size	Waist (A)	Inseam (B) Short	Regular	Long	X-Long	Bottom (C) Short	Reg.	Long	X-Long
27	27	32	34	36	38	18-1/4	18-1/4	18-1/4	18-1/4
28	28	32	34	36	38	18-1/4	18-1/4	18-1/4	18-1/4
29	29	32	34	36	38	18-1/2	18-1/2	18-1/2	18-1/2
30	30	32	34	36	38	18-1/2	18-1/2	18-1/2	18-1/2
31	31	32	34	36	38	18-3/4	18-3/4	18-3/4	18-3/4
32	32	32	34	36	38	18-3/4	18-3/4	18-3/4	18-3/4
33	33	32	34	36	38	19	19	19	19
34	34	32	34	36	38	19	19	19	19
35	35	32	34	36	38	19-1/4	19-1/4	19-1/4	19-1/4
36	36	32	34	36	38	19-1/4	19-1/4	19-1/4	19-1/4
37	37	32	34	36	38	19-1/2	19-1/2	19-1/2	19-1/2
38	38	32	34	36	38	19-1/2	19-1/2	19-1/2	19-1/2
39	39	32	34	36	38	19-3/4	19-3/4	19-3/4	19-3/4
40	40	32	34	36	38	19-3/4	19-3/4	19-3/4	19-3/4
42	42	32	34	36	38	20	20	20	20
Tolerances:	± 1/2	+1 - 1/2	+1 - 1/2	+1 - 1/2	+1 - 1/2	±1/2	±1/2	±1/2	±1/2

(A) - With slide fastener closed and waistband hooked, measure along top edge of waistband from folded edge to folded edge.
(B) - Measure along inseam from crotch seam to (unhemmed) bottom edge of leg.
(C) - Measure across unhemmed bottom edge of leg. Multiply by two.

3.9 Workmanship. The finished trousers shall conform to the quality and grade of product established by this specification. The occurance of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-1488, except where otherwise indicated.

* 4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, a certificate of compliance (see 4.1.2) shall be furnished by the contractor for the non-slip tape requirements of 3.3.6, the slide fastener requirements of 3.3.11 stating that all metal components are brass except for a semi-automatic pin lock cover and spring, which shall be stainless steel and that all components of the slide fastener are furnished by the same supplier. Also, a certificate of compliance shall be furnished stating the hooks and eyes are one of the specified types required in 3.3.12.

4.4.2 Examination of the end item. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1488. The trousers shall be classified as semi-dress ("SD") trousers.

4.4.3 Examination of packaging requirements. Examination of the packaging shall be in accordance with MIL-STD-1488.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the currentversion before use.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the acceptable quality level, AQL, expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of trousers shall be folded to a length of 23 inches. Five pairs of trousers, of one class and size only, shall be stacked in a bundle with the waistbands alternated end for end, and securely tied with cotton tape or twine approximately 4 inches in from each end.

5.1.2 Level C. Trousers shall be preserved to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A packing. Forty (40) pairs of trousers of one class, size, and length only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 3A of MIL-B-17757. The fiberboard used for the liner shall conform to type CF, class domestic, conforming to MIL-B-17757. Level A packages shall be packed flat within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:07Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B packing. Forty (40) pairs of trousers of one class, size, and length only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced, conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard used for the liner shall conform to type CF, class domestic, conforming to MIL-B-17757. Level A packages shall be packed flat within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C packing. Trousers, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with US Postal Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or film bonding F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

* 5.5 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The trousers are intended for wear by the male military personnel of the Navy and Coast Guard as part of the semi-dress uniform.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Class, sizes and lengths required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
e. Levels of preservation and packing required (see 5.1 and 5.2)
f. When palletization is required (see 5.4)
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

6.3 Samples and patterns. For access to sample and patterns, address the procuring activity issuing the invitation for bids.

6.4 Equal item. Prior to the use of an "equal item", the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Deletions. Type II, class 3 has been deleted from this revision. This item has been replaced by class 4 of this specification.

* 6.7 Subject term (key word) listing:
Uniform, polyester/cotton
Uniform, semi-dress
Uniform, unhemmed

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT
Navy - CG

Project No. 8405-0083

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

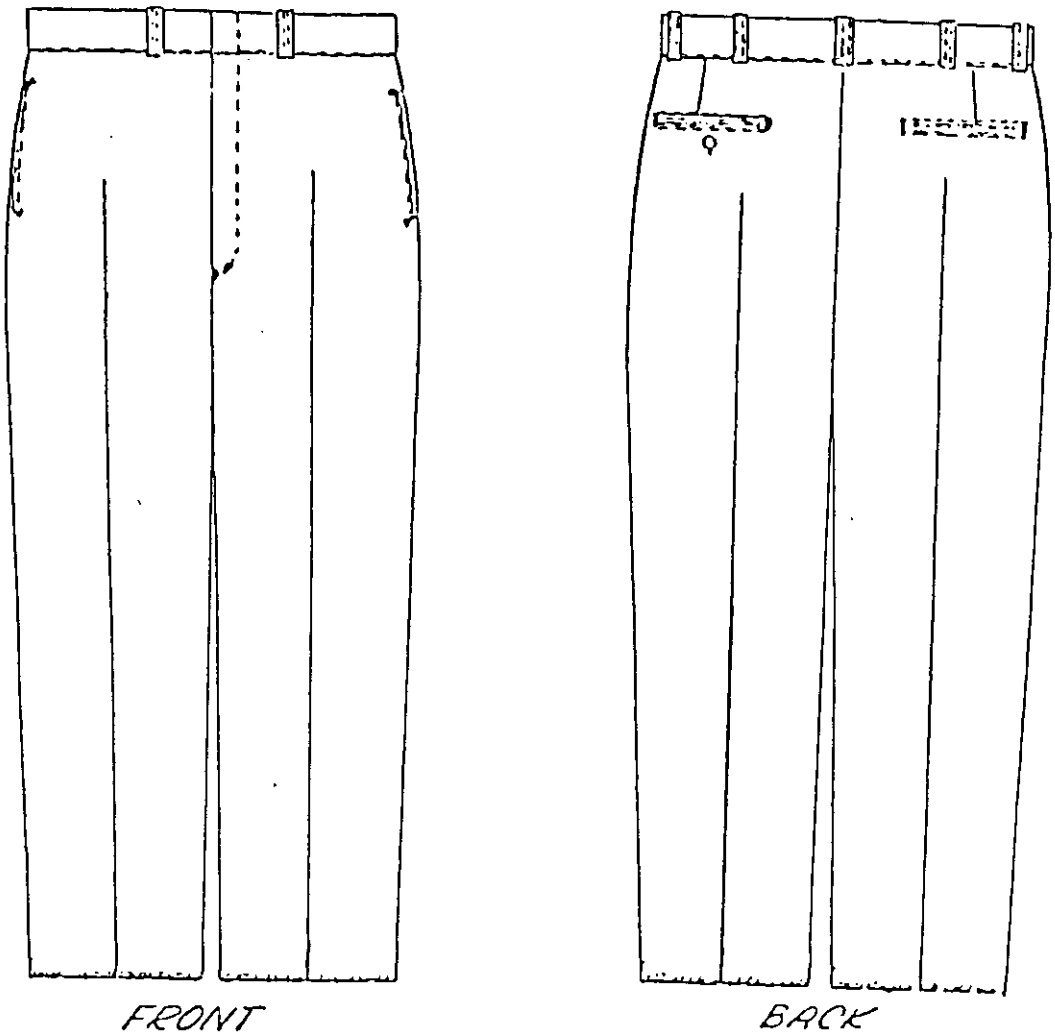


FIGURE 1

TROUSERS, MEN'S, POLYESTER AND COTTON

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

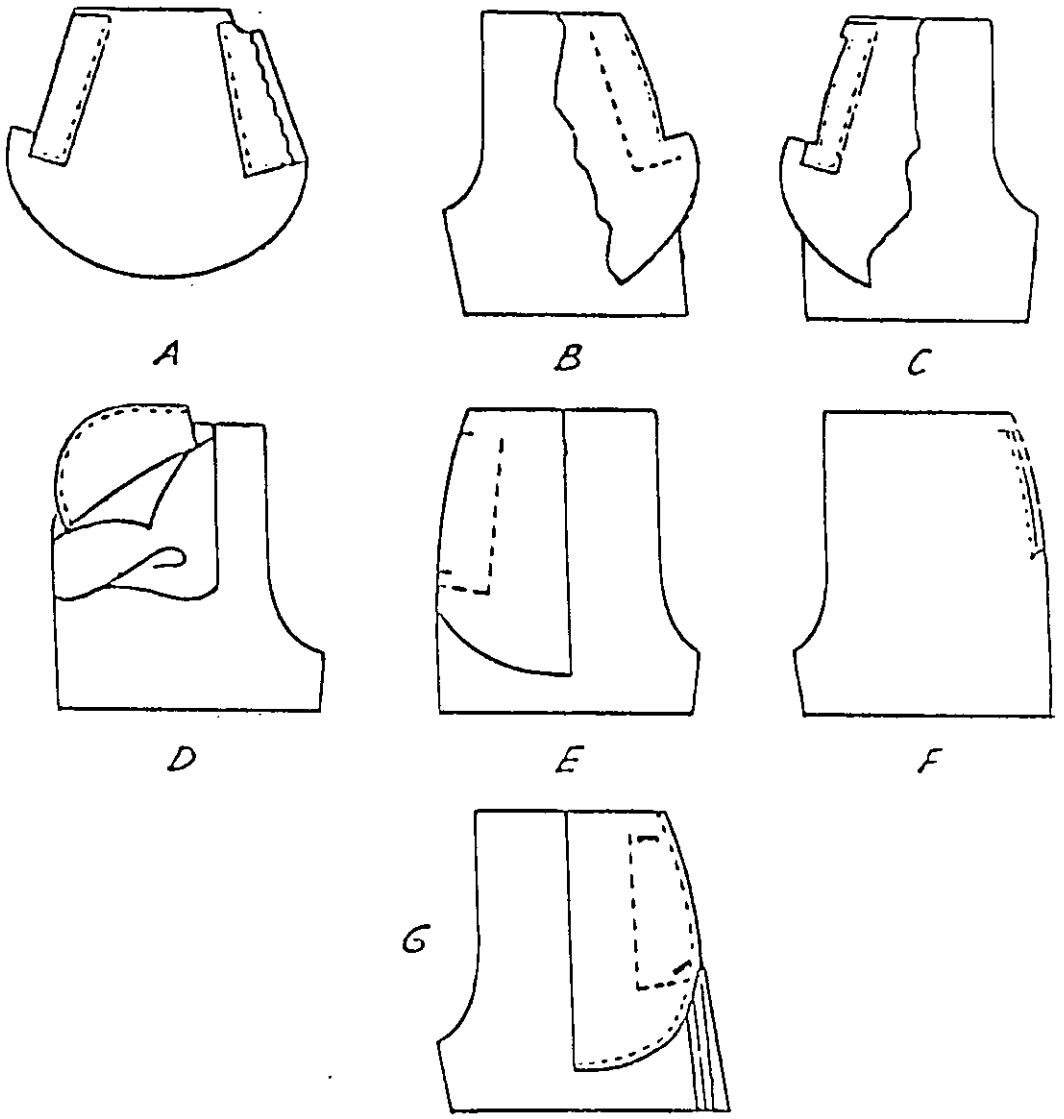


FIGURE 2

TROUSERS, MEN'S, POLYESTER AND COTTON

SIDE POCKET

A - STITCH FACING AND BEARER TO POCKET
B - STITCH POCKET TO FRONT
C - TURN POCKET AND TOP STITCH
D AND E - SEAMED AND TURNED
F - TACK POCKET OPENING TO BEARER
G - FINISHED POCKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

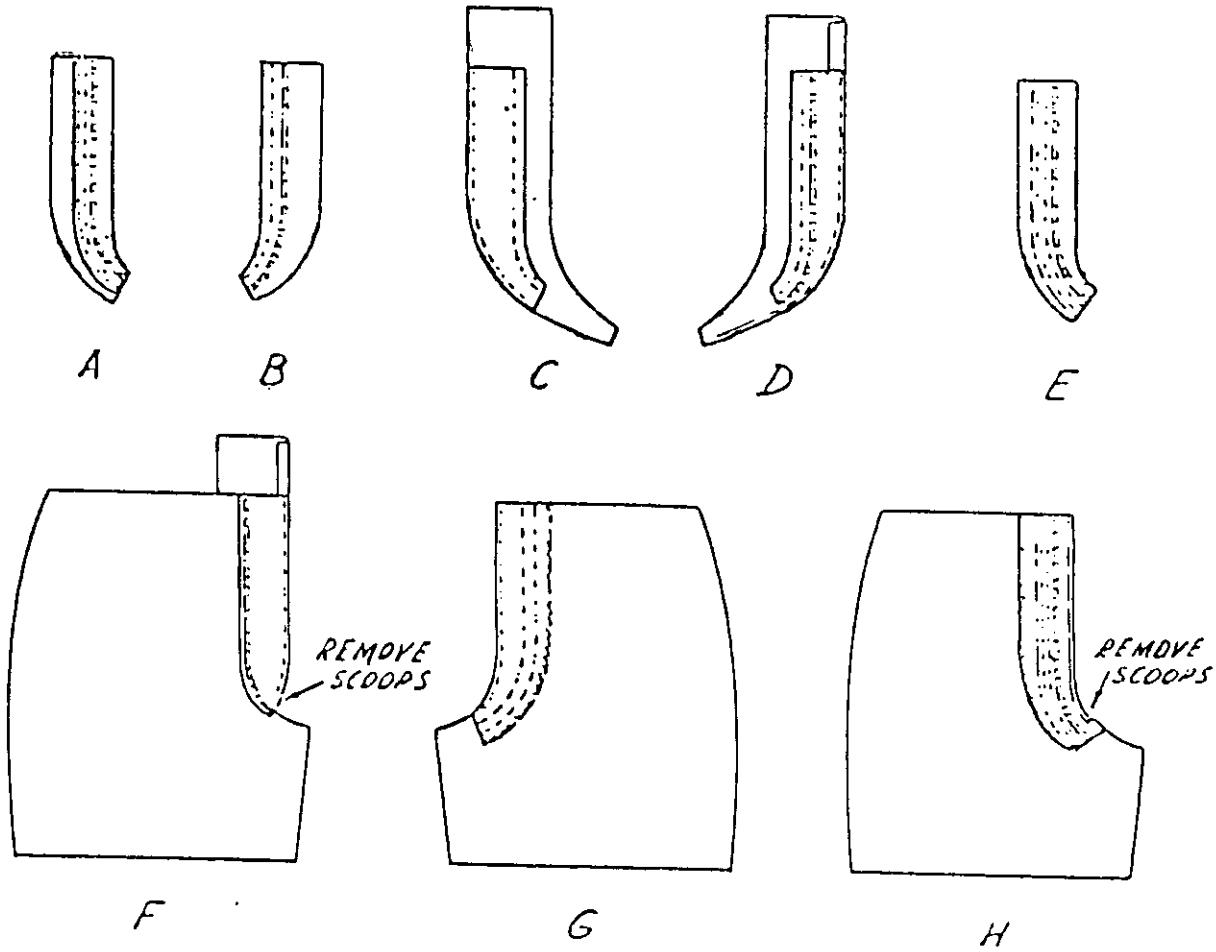


FIGURE 3

TROUSERS, MEN'S, POLYESTER AND COTTON

FLY (RIGHT AND LEFT)

A - DOUBLE STITCH SLIDE FASTENER TAPE TO LEFT FLY THROUGH LINING
B - SEAM SLIDE FASTENER TAPE TO RIGHT FLY
C AND D - SEAM LINING TO RIGHT FLY, TURN AND RAISE STITCH
E - OVEREDGE LEFT FLY
G AND H - JOIN LEFT FLY TO TROUSERS AND PRESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

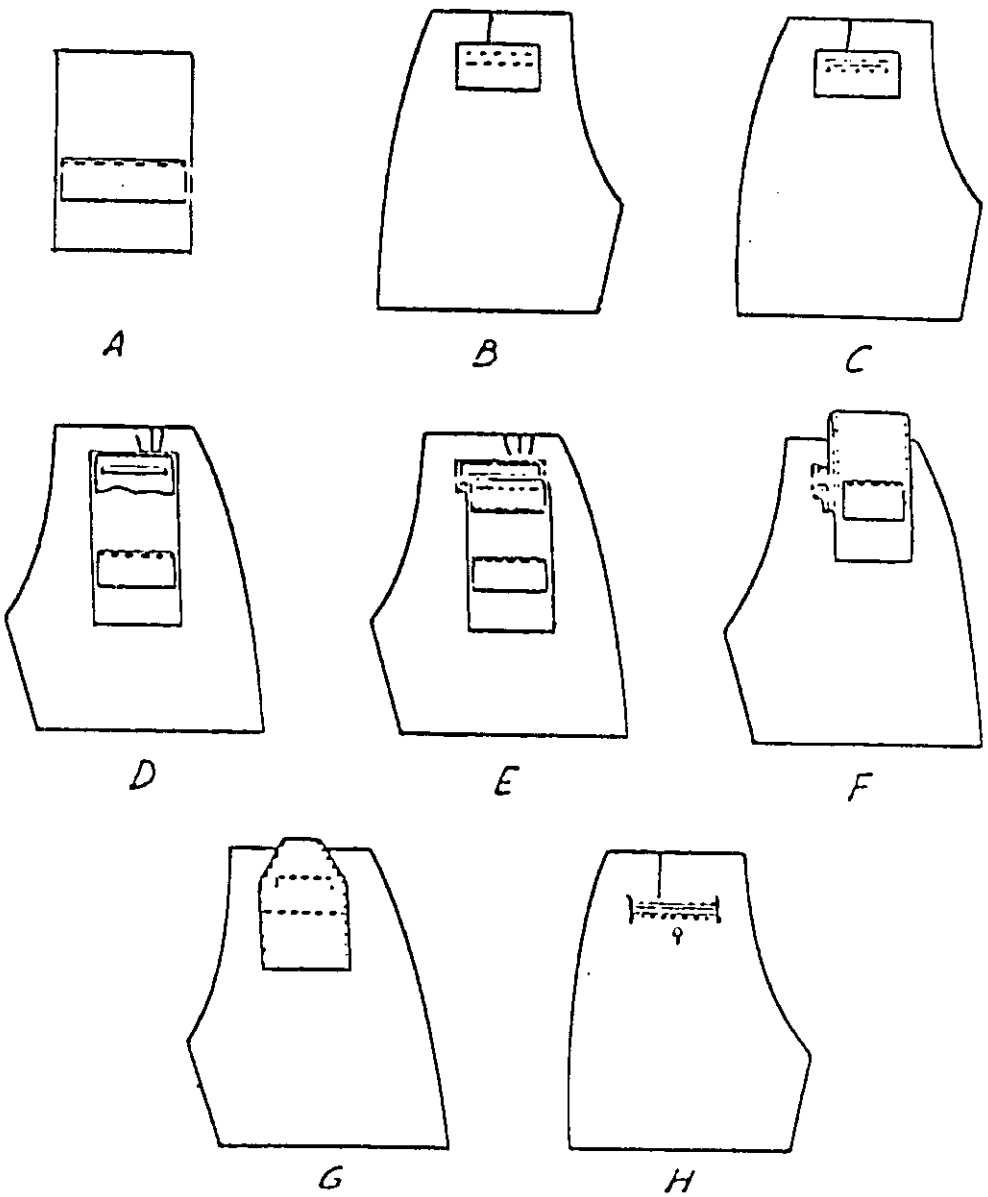


FIGURE 4

TROUSERS, MEN'S, POLYESTER AND COTTON

HIP POCKET

A - BEARER/FACING ON POCKET
B - BEARER/FACING PIECE ON OUTSIDE OF TROUSERS
C - CUT THROUGH BEARER/FACING PIECE AND TONGUE NOTCH
D - BEARER/FACING TURNED INSIDE
E - MAKE WELT
F - POCKET PULLED UP AND CLOSED
G - RAW EDGES OF POCKET TURNED TO INSIDE AND TOP STITCHED ON SIDES
H - TOP POCKET OPENING STITCHED THROUGH POCKET AND BEARER/FACING PIECES

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

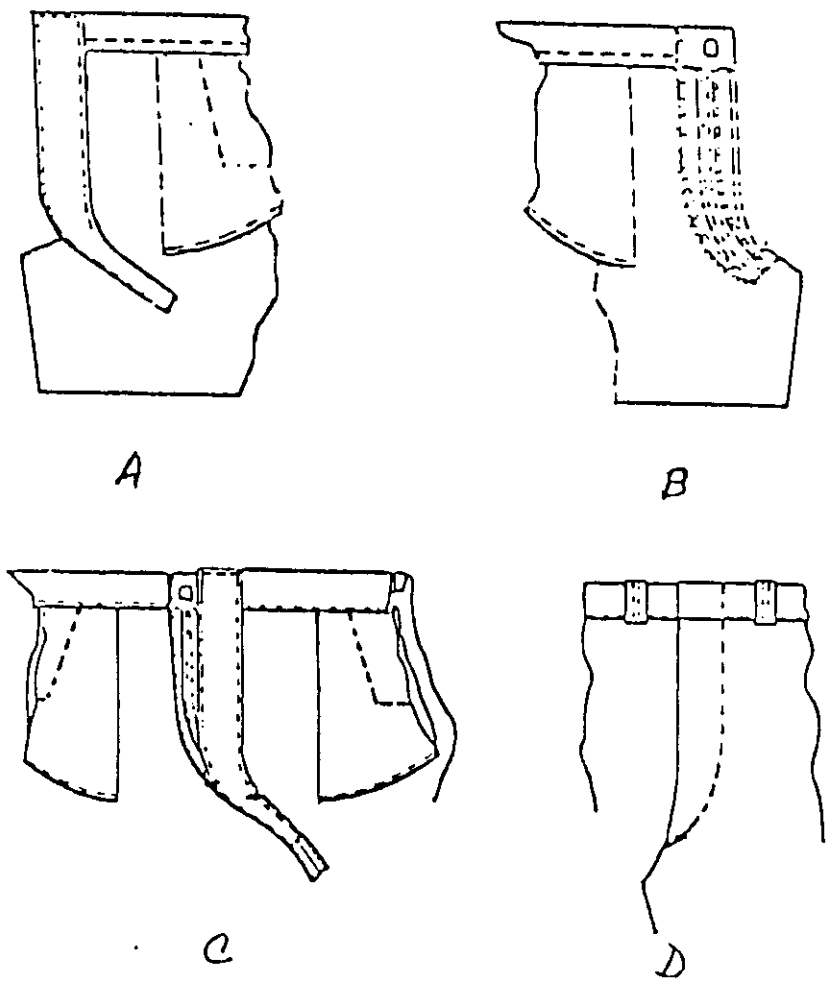


FIGURE 5

TROUSERS, MEN'S, POLYESTER AND COTTON

FINISHED FLY (RIGHT AND LEFT)

A - RAISE STITCH RIGHT FLY CATCHING LINING
B - RAISE STITCH BACK EDGE OF LEFT FLY THROUGH TROUSERS
C - FINISH END OF RIGHT FLY LINING
D - BARTACK BASE OF FINISHED FLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
Post Office Box 59
Attn: Code 50
Natick, MA 01760-0001

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-41834G	TROUSERS, MEN'S, POLYESTER AND COTTON

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:07Z
Check the source to verify that this is the current version before use.