# MILITARY SPECIFICATION

## TRANSMITTING SET, TELEMETRIC DATA, AN/DKT-16A(V)

## (AND ACCESSORIES)

This specification has been approved by the Bureau of Naval Weapons, Department of the Navy

1. SCOPE

1.1 Scope. - This specification covers the requirements for the production of the telemetric data transmitting set, AN/DKT-16A(V) (LD 539692), hereinafter referred to as the "Telemeter insert". Telemeter antenna (Dwg. 2217527-1) and coaxitube assembly (Dwg 1598356) are covered herein as accessories thereto (see 6.1.2)

1.2 Classification. - The telemeter inserts specified herein are classified as production telemeter inserts.

2. APPLICABLE DOCUMENTS

2.1 Documents. - The following documents of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

| | |
|---|---|
| MIL-P-116 | Preservation, Method of |
| MIL-W-5088 | Wiring, Aircraft, Installation of |
| MIL-W-16878 | Wire, Electrical, Insulated, High Temperature |

FSC 5821

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| MIL-I-16910 | Interference Measurement, Radio Methods and Limits; 14 Kilocycles to 1000 Megacycles. |
| MIL-D-70327 | Drawings, Engineering and Associated Lists |

STANDARDS

MILITARY

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-109 | Inspection Terms and Definitions |
| MIL-STD-129 | Marking for Shipment and Storage |
| MIL-STD-143 | Specifications and Standards, Order of Precedence |
| MIL-STD-167 | Mechanical Vibrations of Shipboard Equipment |
| MIL-STD-202 | Test Methods for Electronic and Electrical Component Parts |

DRAWINGS

DEPARTMENT OF THE NAVY

BUREAU OF NAVAL WEAPONS

| | |
|---|---|
| LD 519085 | Container, Shipping and Storage, Mark 211 Mod 0 |
| LD 539692 | Transmitting Set, Telemetric Data AN/DKT-16A(V) |
| Dwg. 1598356 | Coaxitube Assembly |
| Dwg. 2140725 | Round, Guided Missile, Mark 3 Mod 0, TERRIER HT-3 Coordination and Approval Drawing, Sta. 21.065 to Sta. 103.316 |
| Dwg. 2140728 | Round, Guided Missile, Mark 3 Mod 0, TERRIER HT-3 Coordination and Approval Drawing, Schematic-Electrical Connections |
| Dwg. 2205197 | Guided Missile, Mark 15 Mod 1 Improved TARTAR Coordination and Approval Drawing, Sta. 4.527 to Sta. 80.565 |



Source: https://assist.dla.mil -- Downloaded: 202640-19T16:26Z
Check the source to verify that this is the current version before use.

Dwg. 2205199 Guided Missile, Mark 15 Mod 1, Improved TARTAR Coordination and Approval Drawing, Schematic-Electrical Connections

Dwg. 2217527-1 Antenna, Telemeter, Dorsal Fin, Tuned

PUBLICATIONS

DEPARTMENT OF THE NAVY

BUREAU OF NAVAL WEAPONS

NAVORD OD 9969 Electrical and Electronic parts installation

NAVORD OD 17001 HT-3 TERRIER and Improved TARTAR Telemeter Parameters Document

OP 400 General Instructions for the Design, Manufacture and Inspection of Naval Ordance Equipment

OP 2230 Workmanship and Design Practices for Electronic Equipment

NAVORD OS 6341 Miscellaneous General Ordance Design Requirements

NAVORD OS 7401 (Secret) Altitude Requirements for TARTAR HT-3/BT-3 TERRIER Guided Missile Components(U)

NAVORD OS 7615 Description and Requirements for Guidance, Control and Airframe Groups TERRIER HT-3 (Mark 8 Mod 0) and Improved TARTAR (Mark 10 Mod 1)

NAVORD OS 10221 Guidance, Control and Airframe Groups, Mark 8 Mod 0 (TERRIER HT-3), Mark 10 Mod 1 (Improved TARTAR), Design Requirements

NAVORD OS 10228 Battery Assembly for Exercise Head Mark 7 Mod 2, Exercise Head Kit Mark 16 Mod 0

NAVORD OSTD-78 Ordnance Classification of Defects

BuWeps Instruction 4200.7 Technical Data Procurement; Policies and Procedures for

NAVORDINST 5600.14 Technical Documentation

(Copies of the above documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer)



standard sense

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:26Z
Check the source to verify that this is the current version before use.

2.2 Other documents. - The following document forms a part of this specification. Unless otherwise indicated, the issue in effect on the date of invitation for bids shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H-28 — Screw thread standards for Federal Services

(Application for copies of the above handbook should be addressed to the Superintendent of Documents, Government Printing Office, Washington, 25, D. C.)

2.3 Precedence. - Precedence of specifications and standards shall be in accordance with Standard MIL-STD-143

2.4 Conflicting requirements. - Conflicting requirements arising between this specification and any specifications, standards, publications or drawings listed herein shall be referred in writing to the procuring agency or its appointed agent for interpretation and clarification.

2.5 Requests for deviation. - Requests for deviation from this specification, applicable drawings, specifications, publications, materials and processes specified herein shall be as set forth in OP 400.

3. REQUIREMENTS

3.1 Description. - The telemeter insert assembly consists of three principal components composed of the transmitter, subcarrier oscillator and power supply packages assembled as a single unit for installation in the Exercise Head Mk 7 Mod 2. It is a self-contained 21 channel FM/FM system. A triplex coupler is used to isolate three RF transmitters, while providing a proper match to a common missile telemetering antenna in Improved TARTAR. Two dorsal antennae operating



Source: https://assist.dla.mil -- Downloaded: 20261019T16:26Z
Check the source to verify that this is the current version before use.

in push-pull are used in TERRIER HT-3. Two of the transmitters are phase modulated by 10 subcarriers each, while the third is frequency modulated directly by two missile functions. Flight power for operation of the telemeter insert is obtained from nickel-cadmium batteries which provide 26 volts nominal (see OD 17001)

3.2 Preproduction samples.

3.2.1 Telemeter insert. - Preproduction samples of telemeter inserts, as specified in the contract or order shall be manufactured by the contractor using the methods and processes he proposes to use for the production items. These samples shall be inspected as specified in 4.3.1 and are for the purpose of determining that the contractor's methods and processes are capable of yielding items that comply with the requirements of this specification.

3.2.2 Telemeter antenna and coaxitube assembly. - When telemeter antennas and coaxitube assemblies are required (see 6.2), preproduction samples thereof shall be furnished by the contractor in accordance with the provisions of 3.2.1.

3.3 General requirements. - The telemeter insert shall conform to the dimensions and tolerances shown on BuWeps Dwg. 2140725 for TERRIER HT-3 and to BuWeps Dwg. 2205197 for Improved TARTAR. Electrical connections shall conform to BuWeps Dwg. 2140728 for TERRIER HT-3 and to BuWeps Dwg. 2205199 for Improved TARTAR. The telemeter insert shall conform to the requirements specified in LD 539692, BuWeps Dwg's 1598356 and 2217527-1. The requirements of this specification are detailed



Source: https://assist.dla.mil -- Downloaded: 202610-19T16:26Z
Check the source to verify that this is the current version before use.

only to the extent considered necessary to insure inherent quality and performance capabilities prior to final acceptance by the Government.

3.3.1 Precautionary requirement. - No aspect of the telemeter insert performance shall have a detrimental effect on the performance of the missile.

3.3.2 Interchangeability. - Similar units, components and established spares fabricated in strict agreement with their applicable drawings shall be physically (including weight, static and dynamic balance, and roll balance) and functionally interchangeable and shall assemble with mating components without selection or fitting. If, during assembly of the fabricated parts of a unit, selection or fitting is required, and change of dimensions are necessary, no change in the parts as delineated on the applicable drawings will be made without prior revision and correction of the applicable drawings.

3.3.3 Reliability. - The highest practicable reliability is one of the top priority criteria in the fabrication of the telemeter insert. All contractors shall emphasize this aspect in the manufacture and assembly of components.

3.3.4 Materials. - Materials used in the fabrication of the telemeter insert and its components shall conform strictly to Bureau of Naval Weapons LD 539692 and Dwg. 1598356.

3.3.5 Moisture fungus and corrosion. - The telemeter insert assembly shall be rendered moisture, fungus and corrosion resistant in accordance with the detail requirements specified in Bureau of Naval Weapons LD 539692 and Dwg. 1598356. When moisture, fungus and corrosion



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.

resistance is not specified in these drawings, the telemeter set shall be moisture, fungus and corrosion resistant as required by NAVORD OS 6341.

3.3.6 Protective coatings and surface treatments. - Protective coatings and surface treatments shall conform to the requirements of NAVORD OS 7615.

3.3.6.1 Exterior surfaces. - Exterior surfaces of the telemeter insert assembly shall conform to the requirements of Bureau of Naval Weapons LD 539692 and Dwg. 1598356.

3.3.7 Marking. - Marking of the telemeter insert shall be in accordance with Bureau of Naval Weapons LD 539692 and Dwg. 1598356. All safety precautions shall be stencilled clearly with contrasting paint in a prominent location. Switches and adjustment devices shall be identified with appropriate markings stencilled alongside such switches and devices.

3.3.7.1 Serial numbers. - Serial numbers of the telemeter insert and its principal components shall be assigned by the manufacturer in accordance with instructions prepared by the Bureau of Naval Weapons or its designated representative.

3.3.8 Wiring. - Circuit wiring and its installation shall conform to the requirements of Specifications MIL-W-5088 or MIL-W-16878. Teflon insulation is authorized, as required.

3.3.9 Screw threads. - Screw threads for all threaded parts shall be in accordance with National Bureau of Standards Handbook H-28 and the supplements thereto.



Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:26Z
Check the source to verify that this is the current version before use.

3.3.10 Mounting of electronic parts. - The mounting of electronic parts shall conform to the methods outlined in Bureau of Naval Weapons OD 9969 or to OP 2230.

3.3.11 Electrical interference. - The telemeter insert shall not adversely affect the operation of nearby equipment nor shall itself be affected in operation by radiated or conducted electrical voltage. This requirement specifically includes oscillator interferences and spurious emissions in addition to random interferences from components, wiring, control signals or power cables. The contractor shall determine and report to the Bureau of Naval Weapons the degree to which the telemeter insert assembly meets the electrical noise requirements of Specification MIL-I-16910.

3.4 Performance and product characteristics.

3.4.1 Telemeter insert.

3.4.1.1 Factory performance. - Under normal ambient conditions (see 4.3.2) the telemeter insert shall meet the performance requirements as specified in OD 17001 for factory ambient conditions.

3.4.1.2 Flight performance. - Under the environmental conditions as specified herein, the telemeter insert shall meet the performance requirements as specified in OD 17001 for simulated flight environmental conditions.

3.4.1.3 Service life.

3.4.1.3.1 External power. - The telemeter insert shall have a service life of at least 10 hours when operated from an external power source of 26 ± 2 volts direct current. Servicing and maintenance during the



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.

specified life shall be limited to readjustment of the subcarrier oscillators at the conclusion of each two hours of ON time. Except for the time required for specified servicing, the service life shall be based on continuous duty cycles of 15 minutes ON and 30 minutes OFF. The telemeter insert shall be thermally stabilized at plus 125 degrees F. prior to beginning the test (see 6.4.2). The telemeter insert shall meet the performance requirements as specified herein throughout the specified life.

3.4.1.3.2 Internal power. - The telemeter insert shall have a service life of at least 12 minutes, either continuous or intermittent, over a 30-day period when operated from its internal source. This requirement shall be complied with under the environmental conditions specified in 3.5 and without recharging the batteries. The telemeter insert's batteries shall be capable of not less than 5 normal charges and discharges, wherein the normal charge shall be in accordance with OS 10228 (covering a detail of LD 539692) and the discharge shall be 12 minutes of operation of the telemeter insert as specified herein. The batteries shall not leak electrolyte in any position while being subjected to the noted service life. The telemeter insert shall meet the performance requirements as specified herein throughout the specified life.

3.4.1.4 Electrical interference. - The telemeter insert shall comply with the interference control requirements specified in Specification MIL-I-16910. Interference of less than one second



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.

duration occurring not more than once every 30 seconds and having a peak amplitude of not more than 20 decibels above the limits specified therein are exempt from the specified requirements (see 3.3.11).

3.4.2 Telemeter antenna and coaxitube assembly.

3.4.2.1 Factory performance. - Under normal ambient conditions, the telemeter antenna and coaxitube assembly shall meet the performance requirements as specified in Dwg's 2217527-1 and 1598356, respectively.

3.4.2.2 Flight performance. - Under environmental conditions as specified in 3.5, the telemeter antenna and coaxitube assembly shall meet the performance requirements as specified in Dwg's 2217527-1 and 1598356, respectively.

3.5 Environmental requirements. - The environmental requirements shall be as specified herein.

3.5.1 Telemeter insert. - The telemeter insert shall withstand the environmental conditions specified herein and all reasonable combinations thereof. Unless otherwise specified herein, the telemeter insert shall withstand the specified environments with charged batteries and simulated service installation. (See 6.4.3)

3.5.1.1 Test performance. - Except as specified in 3.5.1.3.1, the telemeter insert shall meet the performance requirements specified in 3.4.1.2 while subjected to the specified environments.

3.5.1.2 Post test performance. - The telemeter insert shall meet the performance requirements specified in 3.4.1.1 subsequent to



Source: https://assist.dla.mil -- Downloaded: 202610-19T16:26Z
Check the source to verify that this is the currentversion before use.

exposure to the specified environments.

3.5.1.3 Temperature and humidity. -

3.5.1.3.1 Storage. - The telemeter insert with uncharged batteries and packaged as specified in 5.2.1 shall withstand thermal stabilization (See 6.4.2) at temperatures of minus 40 degrees F and plus 160 degrees F. The relative humidity within the container at the start of storage shall be not more than 40 per cent at plus 68 degrees F.

3.5.1.3.2 Operational. - The telemeter insert shall be capable of satisfactory operation for a minimum of 12 minutes after exposure to the environments of 3.5.1.3.2.1 and 3.5.1.3.2.2.

3.5.1.3.2.1 Temperature. - The performance required by 3.5.1.3.2 shall be obtained when the telemeter insert is thermally stabilized (See 6.4.2) at temperatures of plus 20 degrees F and plus 125 degrees F.

3.5.1.3.2.2 Humidity. - The performance required by 3.5.1.3.2 shall be obtained when exposed to a relative humidity of 95 per cent at plus 85 degrees F for a minimum of eight hours.

3.5.1.4 Vibration. -

3.5.1.4.1 Shipboard. - The telemeter insert shall withstand Type I environmental vibration as specified in Standard MIL-STD-167 applied to each of the three mutually perpendicular axes (See Figure 1). The frequency of vibration shall not exceed 33 cycles per second.

3.5.1.4.1.2 Linear Vibration. - The telemeter insert shall withstand linear vibration applied to each of the three mutually perpendicular axes (See Figure 1) at a peak acceleration of 5.0 (+.5, -.0) gravity units (g) sweeping the frequency range exponentially from



Source: https://assist.dla.mil -- Downloaded: 202610-19T16:26Z
Check the source to verify that this is the current version before use.

20 to 1000 cycles per second for a period of 2.0 ± 0.1 minutes for each axis.

3.5.1.4.1.3 Torsional vibration.- The telemeter insert shall withstand torsional vibration applied about the EF axis at the E end (see Figure 1) in an exponential frequency sweep from 20 to 300 cycles per second capable of producing 280 radians per second per second rotational acceleration over the entire frequency range for a period of 2.0 ± 0.1 minutes.

3.5.1.4.1.4 Launcher vibration. - The telemeter insert shall withstand the following launcher vibrations:

| Insert Axis (See Fig. 1) | Frequency | G Force | Duration |
|---|---|---|---|
| AB & CD | 5-7 cps | 3.2 | 5 minutes each plane |
| AB & CD | 5-7 cps | 2.2 | 25 minutes each plane |

3.5.1.5 Shock.

3.5.1.5.1 Linear. - The telemeter insert shall withstand a linear shock of at least 40 g with a rise time of .010 (± .003) second and a duration of at least .015 second. The shock shall be applied parallel to the EF axis in the E to F direction.

3.5.1.5.2 Torsional. - The telemeter insert shall withstand a torsional shock of a triangular shape of 700 (+ 100, -0) radians per second per second for .030 (+ .005, -.000) second applied about the EF axis.

3.5.1.5.3 Handling. - The telemeter insert shall withstand a handling shock pulse of a triangular shape of 30g with a rise time of



Source: https://assist.dla.mil -- Downloaded: 202610-19T16:26Z
Check the source to verify that this is the current version before use.

0.001(± .0003) seconds and a duration of .030 (± .005) seconds. The shock shall be applied parallel to each of the mutually perpendicular axes in both directions.

3.5.1.6 Acceleration.- The telemeter insert shall withstand the following sustained accelerations:

| Type Acceleration. | Application Axis | Magnitude |
|---|---|---|
| Longitudinal | E to F | 40g |
| Longitudinal | F to E | 7g |
| Lateral | A to B | 28g |
| | B to A | 28g |
| | C to D | 28g |
| | D to C | 28g |
| Rotational | About EF | 60 rad/ sec per sec |

Duration of accelerations shall be 10 seconds in each direction with a uniform build-up to peak in more than .010 second. The lateral and rotational accelerations may occur in combination.

3.5.1.7 Altitude. - The telemeter insert shall withstand the maximum altitude conditions specified in OS 7401. The rate of change shall be at least 2000 feet per second.

3.6 Ordnance classification of defects. - The Bureau of Naval Weapons will provide the Ordnance Classification of Defects (OCD's) prepared in accordance with OSTD-78. The contractor shall maintain and make available to the agency designated to prepare the OCD's all drawings, standards and specifications necessary for their preparation.

3.7 Preproduction test procedures document. - Unless otherwise specified in the contract or order, the contractor shall prepare a



Source: https://assist.dla.mil -- Downloaded: 202610-19T16:26Z
Check the source to verify that this is the currentversion before use.

preproduction test procedures document in the form of a NavOrd OD to be submitted to the Bureau of Naval Weapons for approval not less than 60 days prior to the date needed for the tests.

3.8 Acceptance test procedures document.- The contractor shall prepare an acceptance test procedures document in the form of a NAVORD OD to be submitted to the Bureau of Naval Weapons for approval not less than 60 days prior to the date needed for the tests.

3.9 Technical documentation. - The various types of technical documents and how they shall be prepared are specified in NAVORDINST 5600.14. The contractor shall be responsible for the maintenance of all documentation as specified in the contract. Drawings and associated lists shall be prepared in accordance with Specification MIL-D-70327.

3.10 Technical data procurement procedures. - Technical data procurement shall be in accordance with BuWeps Instruction 4200.7.

3.11 Cleanliness. - The standard of cleanliness throughout the fabricated and assembled telemeter insert shall be commensurate with good manufacturing practices. There shall be no foreign matter such as excess solder, bits of insulation, filings, chips, etc. left within the assembly. Burrs and sharp edges as well as rosin flash shall be removed.

3.12 Government furnished or loaned property.- Government furnished or loaned property will be as specified in the contract or order (see 6.2)

3.13 Workmanship. - The quality of workmanship shall be such as to assure compliance with all of the requirements of this specification. The items furnished hereunder shall be free of any defects which may



Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:26Z
Check the source to verify that this is the currentversion before use.

adversely affect the safety, performance, life or interchangeability thereof, or adversely affect the compatibility of the item with the other components of the weapon system of which it is a part. The requirements of OP 2230 shall apply.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility. - The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection terms. - Inspection terms shall be as defined in Standard MIL-STD-109.

4.1.2 Contractors inspection.- Unless otherwise required by the procuring activity, the contractor is responsible for the performance of all tests and examinations to assure that the telemeter inserts delivered to the Government are in full accordance with all applicable requirements. In addition, the contractor is required to maintain records of all tests and examinations performed and to make these records available to the Government representative upon request.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.

4.1.3 Government inspection.- The Government representative will examine the contractor's records and processes and will witness or perform examinations and tests as are deemed necessary to assure that the components and assemblies of the telemeter insert are in accordance with all applicable requirements.

4.2 Sampling. -

4.2.1 Preproduction sample. - The preproduction samples specified in 3.2 shall be submitted to the Government representative. The number of sample telemeter inserts shall be as specified in the contract or order (see 6.2). Futher production of any items to be furnished hereunder, by the contractor prior to Government approval of the preproduction samples shall be at the contractor's risk.

4.2.2 Inspection lot. - The formation, size and presentation of inspection lots of items furnished hereunder, including items prepared for delivery, shall be in accordance with Standard MIL-STD-105, unless otherwise specified in the contract or order.

4.2.3 Quality assurance sample. - Unless otherwise specified in the contract or order, not less than two telemeter inserts from each production contract or order shall be selected at random by the Government inspector for quality assurance inspection and test.

4.3 Classification of tests. - Tests and inspections shall be classified as preproduction, acceptance and quality assurance. Telemeter inserts shall perform satisfactorily before, during and after each test or inspection. Satisfactory performance shall be that performance which conforms to all applicable requirements. These inspections and



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.

tests shall be performed at the place of manufacture, at an approved commercial laboratory or, at the discretion of the procuring agency, at a Government facility.

4.3.1 Preproduction tests. - The preproduction samples specified in 3.2 and 4.2.1 shall be inspected and tested to determine compliance with the requirements specified herein. The procedure shall be in accordance with the preproduction test procedures document specified in 3.7.

4.3.1.1 Disposition of preproduction samples.- The disposition of preproduction samples shall be as specified in the contract or order (see 6.2).

4.3.2 Acceptance tests. - Acceptance tests shall be conducted on each telemeter insert and accessory which is being submitted for acceptance under the contract or order. The procedure shall be in accordance with the acceptance test procedures document specified in 3.8. Acceptance tests shall be conducted under normal ambient conditions (see 6.4.1).

4.3.3 Quality assurance tests.- Quality assurance tests shall be conducted on samples selected in accordance with 4.2.3. These tests shall cover the requirements of paragraphs 3.3 and 3.4 and shall be described in a NAVORD OD to be prepared by the contractor and submitted to the Bureau of Naval Weapons for approval not less than 60 days prior to its estimated first use. The tests shall be conducted



Source: https://assist.dla.mil -- Downloaded: 202610-19T16:26Z
Check the source to verify that this is the currentversion before use.

4.1.3 Government inspection.- The Government representative will examine the contractor's records and processes and will witness or perform examinations and tests as are deemed necessary to assure that the components and assemblies of the telemeter insert are in accordance with all applicable requirements.

4.2 Sampling. -

4.2.1 Preproduction sample. - The preproduction samples specified in 3.2 shall be submitted to the Government representative. The number of sample telemeter inserts shall be as specified in the contract or order (see 6.2). Futher production of any items to be furnished hereunder, by the contractor prior to Government approval of the preproduction samples shall be at the contractor's risk.

4.2.2 Inspection lot. - The formation, size and presentation of inspection lots of items furnished hereunder, including items prepared for delivery, shall be in accordance with Standard MIL-STD-105, unless otherwise specified in the contract or order.

4.2.3 Quality assurance sample. - Unless otherwise specified in the contract or order, not less than two telemeter inserts from each production contract or order shall be selected at random by the Government inspector for quality assurance inspection and test.

4.3 Classification of tests. - Tests and inspections shall be classified as preproduction, acceptance and quality assurance. Telemeter inserts shall perform satisfactorily before, during and after each test or inspection. Satisfactory performance shall be that performance which conforms to all applicable requirements. These inspections and



Source: https://assist.dla.mil -- Downloaded: 202640-19T16:26Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. -

6.1.1 Telemeter insert. The telemeter insert constitutes a portion of the Guided Missile Exercise Head Mark 7 Mod 2. The exercise head is used in the TERRIER HT-3 Guided Missile Round Mark 3 Mod 0 and Mod 1, and the Improved TARTAR Guided Missile Mark 15 Mod 1.

6.1.2 Telemeter antenna and coaxitube assembly. - The telemeter antenna and coaxitube assembly are used in the TERRIER HT-3 in combination with the telemeter insert.

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Number of telemeter inserts required.

c. Number of telemeter antennas and coaxitube assemblies required.

d. When preproduction samples are not required (see 3.2).

e. Repair parts required.

f. Assignment of serial numbers (see 3.3.7.1).

g. Number of sample units of each item required for the preproduction inspection (see 4.2.1).

h. Responsibility for the preproduction inspection, if different than 4.1.2.

i. Disposition of the preproduction samples (see 4.3.1.1).

j. Preparation for delivery of telemeter inserts, if different than 5.1.1.

k. Preparation for delivery of telemeter antennas, coaxitube assemblies and spare items (see 5.1.2).

l. Special marking, if required (see 5.4).

m. Government furnished or loaned property (see 3.12).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.

6.3 Safety precautions. - In the operation, testing and checkout of the telemeter insert, voltage in excess of 200 volts may be encountered. When equipped with batteries, electrolyte dangerous to personnel may be encountered. Safety precautions should be taken to protect personnel from the specified hazardous conditions.

6.4 Definitions.

6.4.1 Normal ambient conditions. - Normal ambient conditions shall be defined as follows:

a. Temperature - +60 degrees to +95 degrees F.

b. Relative humidity - 10 to 95%.

c. Barometric pressure - 28 to 32 inches of mercury.

6.4.2 Thermal stabilization. - Thermal stabilization is defined as that condition in which all temperatures throughout the test unit are within plus or minus 5 degrees F of the specified value.

6.4.3 Simulated service installation. - The purpose of a simulated service installation is to permit environmental testing and evaluation in an installation duplicating that of the actual installation but under controlled laboratory conditions. For the purpose of this document, simulated service installation shall be defined as the installation of the telemeter insert within the warhead shroud section. The warhead shroud section need not be installed in a missile for the tests specified herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.

NOTICE. - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibity nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.

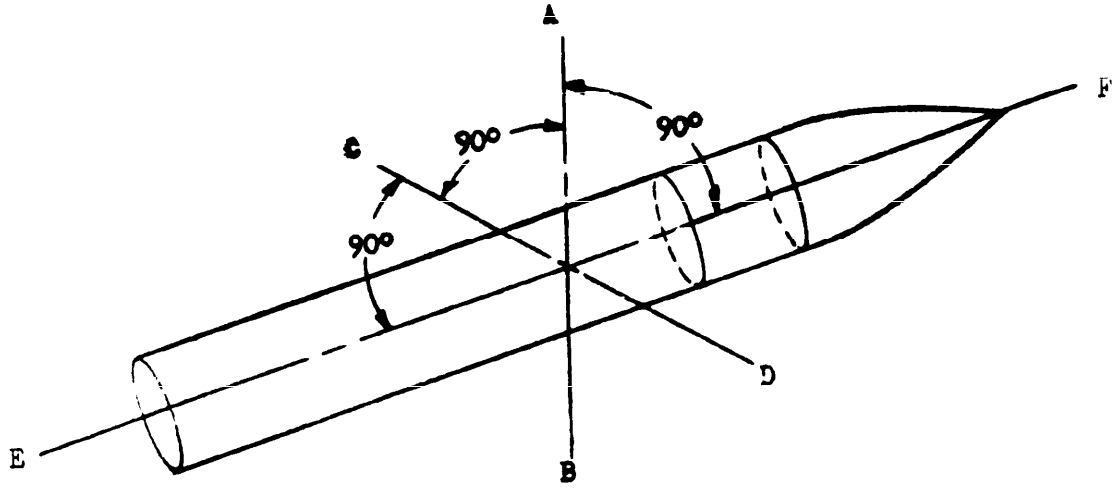



Figure I

MUTUALLY PERPENDICULAR AXES



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:26Z
Check the source to verify that this is the current version before use.