MIL-F-3113D

4 September 1969

SUPERSEDING
MIL-F-3113C
4 November 1963

MILITARY SPECIFICATION

FID

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers fids for splicing fiber rope.

* 1.2 Classification.- Fids shall be of the following types, styles and sizes as specified (see 6.2):

Type I - Hand

Style A - Concave (see figure 1)
Style B - Taper (see figure 2)

Type II - Standing (see figure 3)

Size - See figures 1, 2 and 3

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

TT-L-190 - Linseed Oil, Boiled (For Use in Organic Coatings)

MILITARY

MIL-H-15424 - Hand Tools: Packaging Of

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:05Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of specifications, standards, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

Specification D 2016-65 - Standard Methods of Test for Moisture Content of Wood.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article.- When specified (see 6.2), before production is commenced a sample of the specified item covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

* 3.2 Standard product.- The fids covered by this specification shall be the manufacturer's current, commercial product except for any changes necessary to comply with specification requirements.

* 3.3 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for fids provided the completed item complies with all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:05Z
Check the source to verify that this is the current version before use.

* 3.4 Construction.- The fids shall be of the size, type and style shown on figures 1, 2 and 3, and shall be straight-grained, thoroughly seasoned pecan, beech, rock elm, persimmon, hickory, or hard maple. Slope of grain shall not exceed 1 inch in a length of 15 inches when tested in accordance with 4.4.1. Small surface checks (perceptible openings) not more than 1/32-inch deep, 1/32-inch wide, nor longer than the diameter of the fid measured at the midpoint of the check, and sound tight knots not more than 3/16-inch in diameter, shall be permitted in the upper portion (three quarters) of the fid, measured from the handle end. No defects shall be permitted in the lower portion of the fid. Moisture content of the wood at time of fabrication shall not exceed 18 percent when tested in accordance with 4.3.2.1.

* 3.5 Performance.- Fids shall show no wear, splintering or breakage when tested in accordance with 4.4.1.

* 3.6 Finish.- Fids shall be smoothly surfaced and immersed in linseed oil conforming to TT-L-190 for a period of sufficient duration to thoroughly penetrate the wood.

3.7 Marking for identification.- The fids shall be marked with the manufacturer's name or readily identifiable trademark.

* 3.8 Workmanship.- The fids shall be clean and smooth with no gouge, crack, chip or splinter.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects listed in table I and specified dimensions. The presence of any visual defect or any dimension not within the specified requirements shall be cause for rejection of the preproduction sample.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:05Z
Check the source to verify that this is the current version before use.

* 4.3.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 Intermediate inspection.-

* 4.3.2.1 Testing for moisture content of wood.- Moisture content of the wood requirement in 3.4 shall be determined in accordance with ASTM D-2016 at time of fabrication, except that when testing is performed by the electric moisture meter method, three determinations shall be made on each sample unit. The average of the three determinations shall be the moisture content of the sample unit. The lot shall be all the wood prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one piece of wood for the fid. The inspection level shall be S-1. The acceptable quality level (AQL) shall be 4.0, expressed in terms of defects per hundred units.

4.3.2.2 Slope of grain.- Slope of grain of wood at time of fabrication shall be determined in accordance with 4.4.1. The sample unit shall be one fid. The lot shall consist of all fids of one type, style and size offered for inspection at one time. The inspection level shall be S-1. The acceptable quality level (AQL) shall be 4.0, expressed in terms of defects per hundred units.

* 4.3.3 End item inspection.- For sampling purposes, the lot shall be expressed as the number of fids of the same size, type, and style offered for inspection at one time. The sample unit for this examination shall be one fid.

* 4.3.3.1 Visual examination.- Examination of the fids shall be in accordance with the classification of defects in table I. The inspection level shall be II and the acceptable quality level (AQL) shall be 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:05Z
Check the source to verify that this is the currentversion before use.

TABLE I.- Classification of defects

Examine	Defect
Design	Not in accordance with applicable figure.
Construction	Surface check more than 1/32 inch deep, 1/32 inch wide, and longer than diameter of fid at midpoint of the check. Sound tight knot more than 3/16 inch in diameter in upper 3/4 of fid (measured from large end). Any defect in lower portion of the fid (small end).
Finish	Not oiled.
Workmanship	Not clean and smooth. Any chip, splinter, gouge or crack.
Marking for identification	Missing, incomplete, not legible.

* 4.3.3.2 Dimensional examination.- Each sample unit shall be examined for dimensions specified. Any noncompliance shall be a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

* 4.3.4 Inspection of preparation for delivery.- Inspection of preparation for delivery shall be in accordance with MIL-H-15424.

4.4 Test procedure.-

* 4.4.1 Slope of wood grain.- Slope of grain of the fid shall be determined by one of the following methods combining the grain direction of two adjacent faces of wood (see 3.4). When one of these faces is straight grained, the true slope of grain is shown on the other face. When there is a slope on both faces, the true or combined slope is greater than the slope on either face. Methods of detecting grain slope are shown on edge grained faces (1) by the summer wood bands, (2) by the direction in which a free flowing ink spreads, (3) by the course taken by a narrow strip lifted by a knife point and torn out or (4) by the Teco slope grain detector (see 6.4).

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:05Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing and marking.- Preservation, packaging, packing and marking for level A, B or C shall be in accordance with MIL-H-15424 (see 6.2).

6. NOTES

6.1 Intended use.- Fids covered by this specification are intended to be used for opening and separating strands of rope for splicing.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type, style, and size of fids required (see 1.2 and figures 1, 2, and 3).
(c) First article.- When preproduction sample is required (see 3.1).
(d) Levels of preservation, packaging, and packing required (see 5.1).

6.3 The figures herein are descriptive and not restrictive, and are not intended to preclude the purchase of fids otherwise conforming to this specification.

6.4 Teco slope detector may be obtained from the Timber Engineering Co., Inc., Washington, D.C.

6.5 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SH
Air Force - 84

Review activities:

Navy - SH
Air Force - 84

User activities:


Navy - MC, YD

Preparing activity:

Army - GL

Project No. 5120-0679


Source: https://assist.dla.mil -- Downloaded: 202610-16T17:05Z
Check the source to verify that this is the current version before use.

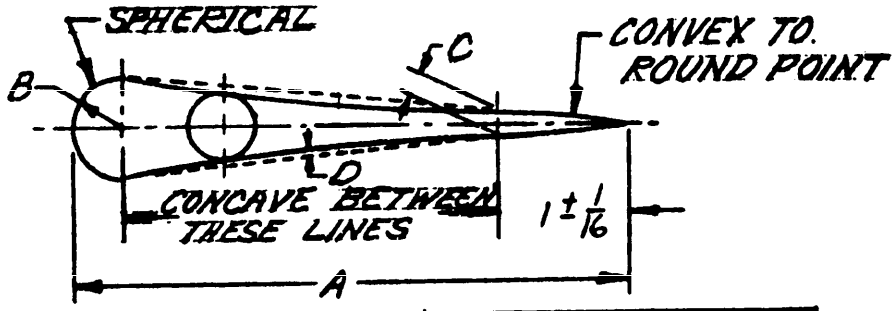

A ±1/4 1/	B ±1/16	C ±1/32	D ±1/32
12"	7/8"	1/4"	1/16"
18"	1"	1/2"	1/16"
24"	1 1/4"	1/2"	1/8"
30"	1"	1/2"	1/8"

1/ WHEN FIDS 18 INCHES OR LARGER ARE REQUIRED, TOLERANCES OF ±1/2 ARE ACCEPTABLE.


FIGURE 1 - TYPE I, STYLE A, HAND CONCAVE FID

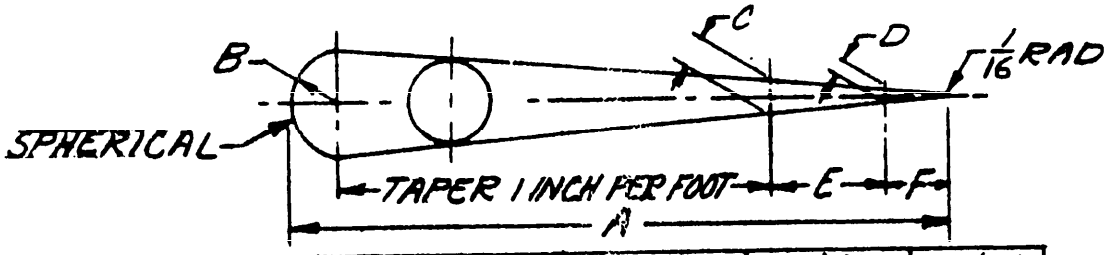

A ±1/4 1/	B ±1/16	C ±1/32	D ±1/32	E ±1/16	F ±1/16
14"	7/8"	13/16"	7/16"	2"	1"
16"	1 1/4"	13/16"	7/16"	2"	1"
18"	1"	13/16"	7/16"	2"	1"

1/ WHEN FIDS 18 INCHES OR LARGER ARE REQUIRED, TOLERANCES OF ±1/2 ARE ACCEPTABLE.

FIGURE 2. - TYPE I, STYLE B, HAND TAPER FID.

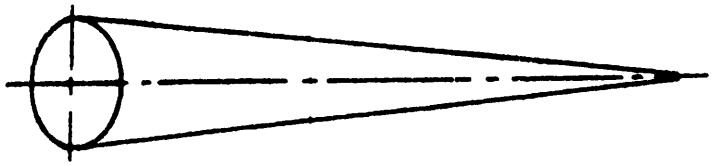

THE LARGE END OF TYPE II FIDS SHALL BE 4 INCHES FOR A 30 INCH LENGTH, AND 6 INCHES FOR A 36 INCH LENGTH.

FIGURE 3. - TYPE II, STANDING FID

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:05Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:05Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
FID MIL-F-3113D

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:05Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-BQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:05Z
Check the source to verify that this is the current version before use.