
MIL-F-15733/29A(USAF)
24 May 1974
SUPERSEDING
MIL-F-15733/29(USAF)
3 August 1972

MILITARY SPECIFICATION SHEET


FILTERS, RADIO INTERFERENCE,
STYLE FL81

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-15733.

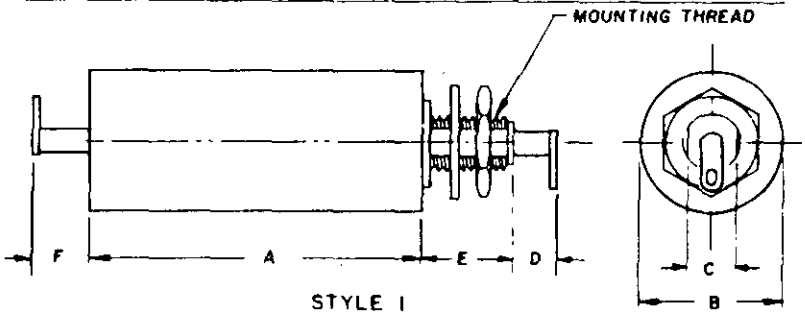

STYLE 1

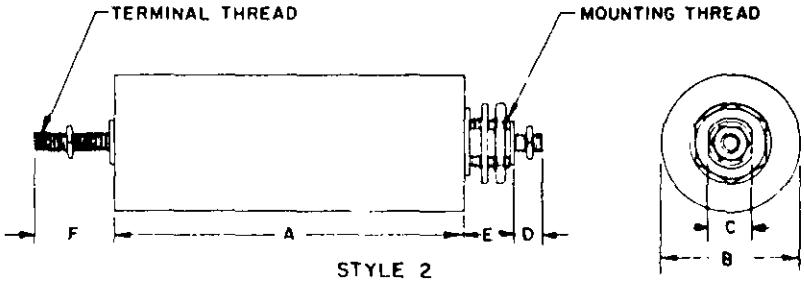

STYLE 2



TYPICAL CIRCUIT DIAGRAM

	Style No.	Dash No.	Type designation	Dimensions											
				A		B	C		D	E		F	Terminal thread	Mounting thread
				Min	Max	Max	Min	Max	Max	Min	Max	Max		
Ⓐ	1	0001	FL81FB1EA3	2.31 (58.67)	2.43 (61.72)	1.50 (38.10)	.650 (16.51)	.660 (16.76)	.50 (12.70)	.350 (8.89)	.370 (9.40)	.50 (12.70)	N A	.750-20 UNEF-2A
	2	0002	FL81FB3MA3	2.31 (58.67)	2.43 (61.72)	1.50 (38.10)	.650 (16.51)	.660 (16.76)	.50 (12.70)	.350 (8.89)	.370 (9.40)	.50 (12.70)	.250-28 UNEF-2A	.750-20 UNEF-2A

NOTES:
1. Dimensions are in inches. Metric equivalents are in parentheses.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Circuit diagram is for information only.
4. Mounting hardware shall be supplied with filter.

Ⓐ denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Configuration and dimensions:
See figure and table.

Rated voltage: 100 volts dc, 30 volts ac.

Rated current: 5 amperes.

Insertion loss characteristic:
See table.

Operating temperature range:
-65 C to +85 C.

Seal: Method 112, test condition B, MIL-STD-202.

Temperature rise: 25 C.

Dielectric withstanding voltage:
Method 301 of MIL-STD-202.

Barometric pressure: Method 105, test condition B, MIL-STD-202

Insulation resistance: Method 302, test condition A, MIL-STD-202.

Maximum voltage drop: .5 volts.

Insertion loss: MIL-STD-220.

Overload: 140 percent of rated current.

Terminal strength: Method 211 of MIL-STD-202.
Pull test - Test condition A - - - 9 pounds.
Bend test - Test condition B - - - 5 bends.
Torque test - Test condition E (threaded stud terminals only).

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202 (solder lug terminals only).

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Temperature and immersion cycling:
Temperature cycling: Method 102, test condition D, MIL-STD-202.
Immersion cycling: Method 104, test condition A, MIL-STD-202.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Moisture resistance:
Temperature cycling: Method 102, test condition D, MIL-STD-202.
Moisture resistance: Method 106 of MIL-STD-202.

Life: Method 108, test condition B, MIL-STD-202.
Test voltage - 1.4 times rated dc voltage.

Part number: M15733 29- (dash number from table).

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5915-F070)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22 R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED. 1 8 0 6 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:17Z
Check the source to verify that this is the current version before use.

FOLD

4950/TZS
Wright-Patterson AFB, O 45433

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S. MAIL

4950/TZS
Wright-Patterson AFB, Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:17Z
Check the source to verify that this is the current version before use.