INCH-POUND

MIL-F-15733/30E
2 September 1988
SUPERSEDING
MIL-F-15733/30D(USAF)
12 August 1981


MILITARY SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL82

Ⓔ Inactive for new design after 2 September 1988. For new design use MIL-F-15733/72. See table III for supersession data.

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the products described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15733.

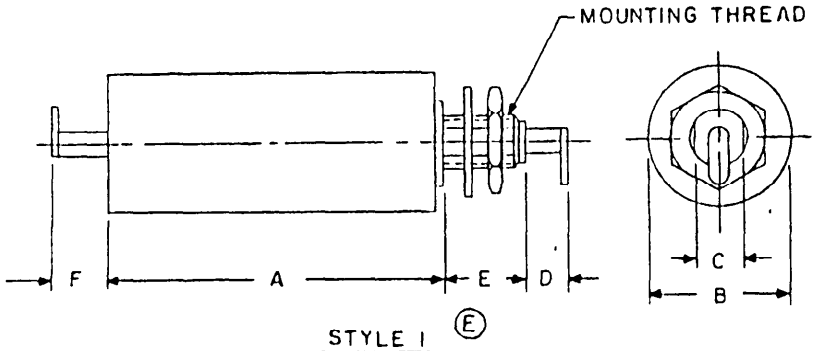

STYLE 1 Ⓔ



TYPICAL CIRCUIT DIAGRAM

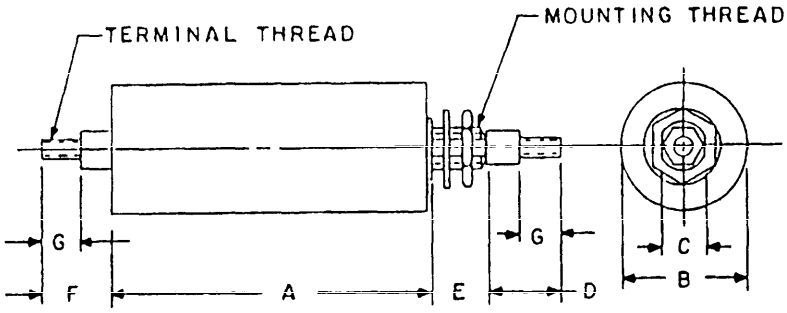

Ⓔ STYLE 2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. Circuit diagram is for information only.
5. Mounting hardware shall be supplied with filter.

FIGURE 1. Case and circuit configuration.

Ⓔ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:17Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics. (E)

Style no.	Dash no.	Dimensions								Terminal thread	Terminal thread length G		Mounting thread
		A		B	C	D	E		F				
		Min	Max	Max	Max	Max	Min	Max	Max		Min	Max	
1	0001	2.56 (65.0)	2.68 (68.1)	1.25 (31.8)	.370 (9.40)	.50 (12.7)	.44 (11.2)	.56 (14.2)	.50 (12.7)	N/A	N/A	N/A	.438-20UNF-2A
(E) 2	0002	2.56 (65.0)	2.68 (68.1)	1.25 (31.8)	.370 (9.40)	.69 (17.5)	.44 (11.2)	.56 (14.2)	.87 (22.1)	.164-32UNC-2A	.312	.375	.438-20UNF-2A
1	0003	2.19 (55.6)	2.31 (58.7)	1.02 (25.9)	.380 (9.65)	.25 (6.4)	.42 (10.7)	.46 (11.7)	.25 (6.4)	N/A	N/A	N/A	.438-20UNF-2A
1	0004	2.81 (71.4)	2.93 (74.4)	1.02 (25.9)	.380 (9.65)	.25 (6.4)	.42 (10.7)	.46 (11.7)	.25 (6.4)	N/A	N/A	N/A	.438-20UNF-2A
1	0005	4.13 (104.9)	4.25 (108.0)	1.27 (32.3)	.380 (9.65)	.25 (6.4)	.42 (10.7)	.46 (11.7)	.25 (6.4)	N/A	N/A	N/A	.438-20UNF-2A
2	0006	3.82 (97.0)	3.94 (100.1)	1.52 (38.6)	.666 (16.92)	.69 (17.5)	.48 (12.2)	.52 (13.2)	.69 (17.5)	.164-32UNC-2A	.312	.375	.750-20UNEF-2A
2	0007	3.82 (97.0)	3.94 (100.1)	1.77 (45.0)	.666 (16.92)	.69 (17.5)	.48 (12.2)	.52 (13.2)	.69 (17.5)	.164-32UNC-2A	.312	.375	.750-20UNEF-2A
2	0008	3.94 (100.1)	4.06 (103.1)	1.52 (38.6)	.666 (16.92)	.69 (17.5)	.48 (12.2)	.52 (13.2)	.69 (17.5)	.164-32UNC-2A	.312	.375	.750-20UNEF-2A
2	0009	4.69 (119.1)	4.81 (122.2)	2.27 (57.7)	1.075 (27.30)	.81 (20.6)	.54 (13.7)	.58 (14.7)	.81 (20.6)	.190-32UNF-2A	.312	.375	1.125-18UNEF-2A
2	0010	5.44 (138.2)	5.56 (141.2)	2.27 (57.7)	1.075 (27.30)	.88 (22.4)	.54 (13.7)	.58 (14.7)	.88 (22.4)	.250-20UNC-2A	.44	.50	1.125-18UNEF-2A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:17Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics.

Dash no.	Rated current (amperes)	Minimum insertion loss (dB) in accordance with MIL-STD-220 at 25°C 1/						
		150 kHz	300 kHz	600 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0001	2	50	60	60	60	60	60	60
0002	2	50	60	60	60	60	60	60
0003	.5	40	50	60	60	60	60	60
0004	1	40	50	60	60	60	60	60
0005	3	40	50	60	60	60	60	60
0006	5	40	50	60	60	60	60	60
0007	10	40	50	60	60	60	60	60
0008	20	37	46	54	58	60	60	60
0009	30	37	46	54	58	60	60	60
0010	50	37	46	54	58	60	60	60

1/ No-load insertion loss measurements shall be performed at 100 MHz and 1 GHz. Full-load insertion loss measurements shall be performed from 150 kHz to 10 MHz.

REQUIREMENTS:

Configurations and dimensions: See figure 1 and table I.

Rated voltage: 100 V dc, 30 V ac.

Rated current: See table II.

Insertion loss characteristic: See table II.

Operating temperature range: -55°C to +125°C.

(E) Seal: Method 112, test condition A of MIL-STD-202.

(E) Temperature rise:

25°C for parts rated up to and including 10 amperes.
35°C for parts rated above 10 amperes.

Insulation resistance: 1,000 megohms minimum where measured at +25°C between both terminals connected together and the case.

Terminal strength: Method 211 of MIL-STD-202.

Pull test: Test condition A - - - 9 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:17Z
Check the source to verify that this is the current version before use.

Bend test: Test condition B - - - 5 bends.

Torque test: Test condition E (threaded stud terminals only).

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202 (solder lug terminals only).

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Thermal shock and immersion cycling:

Thermal shock: Method 107, test condition A, MIL-STD-202, except temperature at step 3 shall be +125°C.

Immersion cycling: Method 104, test condition A, MIL-STD-202.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Moisture resistance:

Thermal shock: Method 107, test condition A, MIL-STD-202, except temperature at step 3 shall be +125°C.

Moisture resistance: Method 106 of MIL-STD-202.

Life: Method 108, test condition B, MIL-STD-202.

Test voltage: 1.4 times rated dc voltage at +125°C.

Part or Identifying Number (PIN): M15733/30- (dash number from table I).

(E) Supersession data: See table III.

TABLE III. Supersession data.

Inactive PIN M15733/30-	Superseding PIN M15733/72-
0001	0058
0002	0059
0003	0055
0004	0057
0005	0059
0006	0061
0007	0063
0008	0065
0009	0067
0010	0069

Source: https://assist.dla.mil -- Downloaded: 20260-18T07:17Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - EC
Air Force - 85

Review activities:
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0334)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:17Z
Check the source to verify that this is the current version before use.