INCH-POUND

MIL-F-15733/4H
27 December 1988
SUPERSEDING
MIL-F-15733/4G
14 May 1980

MILITARY SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE,
STYLE FL53

(H) Inactive for new design after 14 May 1980.
For new design use MIL-F-15733/73.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15733.

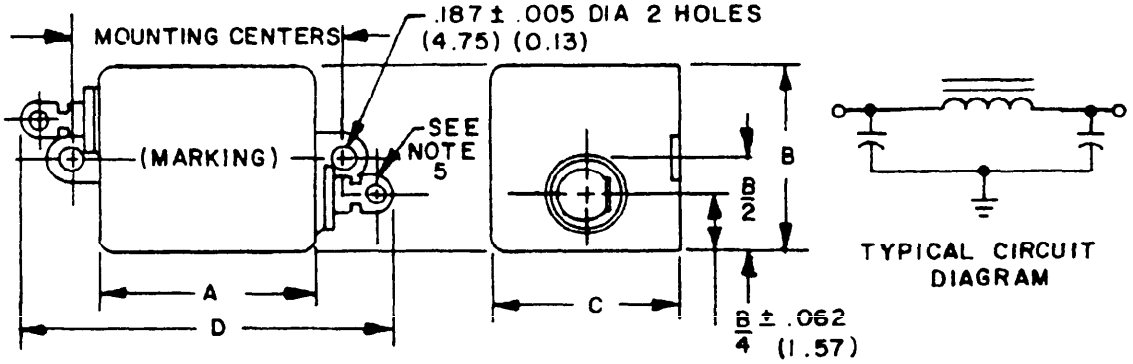


FIGURE 1. Case dimensions and circuit configuration.

(H) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:14Z
Check the source to verify that this is the current version before use.

Dash number	Dimensions							Mounting Center		Rated current (amps)	Insertion loss characteristic
	A		B		C		D				
	Min	Max	Min	Max	Min	Max	Max	Min	Max		
0001	1.688 (42.88)	1.812 (46.02)	1.188 (30.16)	1.312 (33.32)	.813 (20.65)	.937 (23.80)	3.406 (86.51)	2.109 (53.57)	2.141 (54.38)	1	D
0002	1.938 (49.23)	2.062 (52.37)	1.938 (49.23)	2.062 (52.37)	.813 (20.65)	.937 (23.80)	3.594 (91.29)	2.359 (59.92)	2.391 (60.73)	3	D
0003	1.938 (49.23)	2.062 (52.37)	1.938 (49.23)	2.062 (52.37)	1.063 (27.00)	1.187 (30.15)	3.594 (91.29)	2.359 (59.92)	2.391 (60.73)	5	D
0004	1.938 (49.23)	2.062 (52.37)	1.938 (49.23)	2.062 (52.37)	1.438 (36.53)	1.562 (39.67)	3.594 (91.29)	2.359 (59.92)	2.391 (60.73)	10	D
0005	2.438 (61.93)	2.562 (65.07)	1.938 (49.23)	2.062 (52.37)	1.438 (36.53)	1.562 (39.67)	4.094 (103.99)	2.922 (74.22)	2.954 (75.03)	15	B
0006	2.438 (61.93)	2.562 (65.07)	1.938 (49.23)	2.062 (52.37)	1.688 (42.86)	1.812 (46.02)	4.094 (103.99)	2.922 (74.22)	2.954 (75.03)	15	D
0007	2.438 (61.93)	2.562 (65.07)	1.938 (49.23)	2.062 (52.37)	2.063 (52.40)	2.187 (55.55)	4.094 (103.99)	2.922 (74.22)	2.954 (75.03)	30	B
0008	3.190 (81.03)	3.310 (84.07)	2.188 (55.58)	2.312 (58.72)	2.063 (52.40)	2.187 (55.55)	4.969 (126.21)	3.859 (98.02)	3.891 (98.83)	30	D
0009	3.126 (79.40)	3.250 (82.55)	2.188 (55.58)	2.312 (58.72)	2.063 (52.40)	2.187 (55.55)	4.906 (124.61)	3.796 (96.42)	3.828 (97.23)	55	B
0010	3.252 (82.60)	3.372 (85.65)	2.188 (55.58)	2.312 (58.72)	2.063 (52.40)	2.187 (55.55)	5.031 (127.79)	3.922 (99.62)	3.954 (100.43)	55	D

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. Circuit diagram is for information only.
5. Slot or hole opening acceptable for solder lugs.
6. Threaded stud terminals applicable to filters rated at 10 amperes and above (dash numbers 0004 through 0010).

FIGURE 1. Case dimensions and circuit configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Operating temperature range: -65°C to +85°C.

Rated voltage: 125 volts ac; 400 volts dc.

Rated current: See figure 1.

Rated frequency: 0-400 Hz.

Insertion loss characteristic: See figure 1.

Seal: Method 112, test condition B, MIL-STD-202.

(H) Temperature rise: 25°C for parts rated 10 amperes and less.
35°C for parts rated greater than 10 amperes.

Dielectric withstanding voltage: Method 301 of MIL-STD-202.

Barometric pressure: Method 105, test condition B, MIL-STD-202.

Insulation resistance: Method 302, test condition A, MIL-STD-202.

Insulation resistance shall be not less than 1000 megohms (dash numbers 0001 through 0003); 500 megohms (dash numbers 0004 through 0010).

Maximum voltage drop: .5 volt.

Insertion loss: MIL-STD-220.

Overload: 140 percent of rated current.

Terminal strength: Method 211 of MIL-STD-202.

Pull test - Test condition A: 9 pounds.

Bend test - Test condition B: 5 bends.

Torque test - Test condition E (threaded stud terminals only).

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202 (solder lug terminals only).

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Thermal shock and immersion cycling:

Thermal shock: Method 107, test condition A, MIL-STD-202.

Immersion cycling: Method 104, test condition A, MIL-STD-202.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Vibration: Method 201 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:14Z
Check the source to verify that this is the current version before use.

Moisture resistance:

Thermal shock: Method 107, test condition A, MIL-STD-202.

Moisture resistance: Method 106 of MIL-STD-202.

Life: Method 108, test condition B, MIL-STD-202. Test voltage: 1.2 times rated ac voltage.

Part or Identifying Number (PIN): M15733/04-(dash number from figure 1).

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AM, MI
Navy - SH
Air Force - 99
DLA - ES

User activities:
Army - AR, AT, AV, ME
Navy - AS, CG, MG, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0343)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:14Z
Check the source to verify that this is the current version before use.