INCH-POUND

MIL-PRF-15733/23B
27 February 2003
SUPERSEDING
MIL-PRF-15733/23A
1 February 1982

PERFORMANCE SPECIFICATION SHEET

# FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLES FL10 AND FL11

The following dash numbers are inactive for design after 31 May 1990: -0001, through -0006, -0013 through -0018, -0025 through -0030, -0037 through -0042, and -0049 through -0054. The following dash numbers are inactive for design after 30 November 1993: -0007 through -0012, -0019 through -0024, -0031 through -0036, -0043 through -0048, and -0055 through -0060. See table III for supersession data.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-PRF-15733.

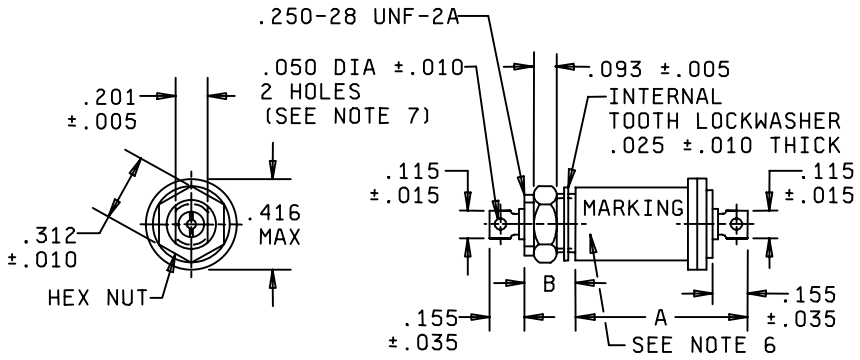


| Inch | mm | Inch | mm |
|---|---|---|---|
| .005 | .13 | .155 | 3.94 |
| .010 | .25 | .187 | 4.75 |
| .015 | .38 | .201 | 5.11 |
| .025 | .64 | .250 | 6.35 |
| .035 | .89 | .312 | 7.92 |
| .050 | 1.27 | .416 | 10.57 |
| .070 | 1.78 | .630 | 16.00 |
| .093 | 2.36 | .730 | 18.54 |
| .115 | 2.92 | | |

FIGURE 1. Case dimensions and circuit diagrams.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:15Z
Check the source to verify that this is the current version before use.

| DIMENSION | | | | | |
|---|---|---|---|---|---|
| A = .630 inches max | | | | A = .730 inches max | |
| B ± .010 | | | | B ± .010 | |
| .312 | | .187 | | .312 | .187 |
| Dash no. | | Dash no. | | Dash no. | Dash no. |
| 0001 | 0031 | 0002 | 0032 | 0005 | 0006 |
| 0003 | 0033 | 0004 | 0034 | 0011 | 0012 |
| 0007 | 0037 | 0008 | 0038 | 0017 | 0018 |
| 0009 | 0039 | 0010 | 0040 | 0023 | 0024 |
| 0013 | 0043 | 0014 | 0044 | 0029 | 0030 |
| 0015 | 0045 | 0016 | 0046 | 0035 | 0036 |
| 0019 | 0049 | 0020 | 0050 | 0041 | 0042 |
| 0021 | 0051 | 0022 | 0052 | 0047 | 0048 |
| 0025 | 0055 | 0026 | 0056 | 0053 | 0054 |
| 0027 | 0057 | 0028 | 0058 | 0059 | 0060 |

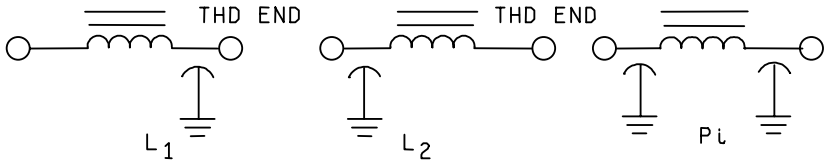


CIRCUIT DIAGRAMS

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagrams are for information only.
4. All filters shall be supplied with mounting hardware.
5. Use of styles FL10 or FL11 with or without shoulder is optional.
6. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter with the symbol “C” or “L” as follows:

| Symbol | Circuit |
|---|---|
| C | $L_1$ |
| L | $L_2$ |

7. Optional terminal hole of .070 ± .010 inch or terminal slot of .050 ± .010 x .070 ± .010 inch may be supplied.

FIGURE 1. Case dimensions and circuit diagrams - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:15Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

| Dash no. | Cir-cuit | Max rated curr. (amp) | Rated dc voltage (volts) | Max voltage drop (volts) | Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | At 25°C | | | | | | | | | At -55°C and +125°C | | | | | | | |
| | | | | | 15 kHz | 30 kHz | 50 kHz | 100 kHz | 150 kHz | 300 kHz | 1 MHz | 10 MHz | 1 GHz | 15 kHz | 30 kHz | 50 kHz | 100 kHz | 150 kHz | 300 kHz | 1 MHz | 10 MHz | 1 GHz |
| 0001 | $L_2$ | .10 | 50 | .17 | 9 | 20 | 29 | 41 | 48 | 60 | 70 | 70 | 70 | 7 | 18 | 27 | 39 | 46 | 58 | 70 | 70 | 70 |
| 0002 | $L_2$ | .10 | 50 | .17 | 9 | 20 | 29 | 41 | 48 | 60 | 70 | 70 | 70 | 7 | 18 | 27 | 39 | 46 | 58 | 70 | 70 | 70 |
| 0003 | $L_1$ | .10 | 50 | .17 | 9 | 20 | 29 | 41 | 48 | 60 | 70 | 70 | 70 | 7 | 18 | 27 | 39 | 46 | 58 | 70 | 70 | 70 |
| 0004 | $L_1$ | .10 | 50 | .17 | 9 | 20 | 29 | 41 | 48 | 60 | 70 | 70 | 70 | 7 | 18 | 27 | 39 | 46 | 58 | 70 | 70 | 70 |
| 0005 | Pi | .10 | 50 | .17 | 15 | 36 | 50 | 69 | 79 | 80 | 80 | 80 | 80 | 13 | 34 | 48 | 67 | 77 | 78 | 80 | 80 | 80 |
| 0006 | Pi | .10 | 50 | .17 | 15 | 36 | 50 | 69 | 79 | 80 | 80 | 80 | 80 | 13 | 34 | 48 | 67 | 77 | 78 | 80 | 80 | 80 |
| 0007 | $L_2$ | .10 | 150 | .17 | 2 | 11 | 20 | 32 | 39 | 51 | 60 | 60 | 60 | NA | 9 | 18 | 30 | 37 | 49 | 60 | 60 | 60 |
| 0008 | $L_2$ | .10 | 150 | .17 | 2 | 11 | 20 | 32 | 39 | 51 | 60 | 60 | 60 | NA | 9 | 18 | 30 | 37 | 49 | 60 | 60 | 60 |
| 0009 | $L_1$ | .10 | 150 | .17 | 2 | 11 | 20 | 32 | 39 | 51 | 60 | 60 | 60 | NA | 9 | 18 | 30 | 37 | 49 | 60 | 60 | 60 |
| 0010 | $L_1$ | .10 | 150 | .17 | 2 | 11 | 20 | 32 | 39 | 51 | 60 | 60 | 60 | NA | 9 | 18 | 30 | 37 | 49 | 60 | 60 | 60 |
| 0011 | Pi | .10 | 150 | .17 | NA | 17 | 31 | 49 | 60 | 70 | 70 | 70 | 70 | NA | 15 | 29 | 47 | 58 | 70 | 70 | 70 | 70 |
| 0012 | Pi | .10 | 150 | .17 | NA | 17 | 31 | 49 | 60 | 70 | 70 | 70 | 70 | NA | 15 | 29 | 47 | 58 | 70 | 70 | 70 | 70 |
| 0013 | $L_2$ | .30 | 50 | .23 | 6 | 15 | 23 | 35 | 42 | 54 | 70 | 70 | 70 | 4 | 13 | 21 | 33 | 40 | 52 | 70 | 70 | 70 |
| 0014 | $L_2$ | .30 | 50 | .23 | 6 | 15 | 23 | 35 | 42 | 54 | 70 | 70 | 70 | 4 | 13 | 21 | 33 | 40 | 52 | 70 | 70 | 70 |
| 0015 | $L_1$ | .30 | 50 | .23 | 6 | 15 | 23 | 35 | 42 | 54 | 70 | 70 | 70 | 4 | 13 | 21 | 33 | 40 | 52 | 70 | 70 | 70 |
| 0016 | $L_1$ | .30 | 50 | .23 | 6 | 15 | 23 | 35 | 42 | 54 | 70 | 70 | 70 | 4 | 13 | 21 | 33 | 40 | 52 | 70 | 70 | 70 |
| 0017 | Pi | .30 | 50 | .23 | 4 | 29 | 44 | 62 | 73 | 80 | 80 | 80 | 80 | 2 | 27 | 42 | 60 | 71 | 80 | 80 | 80 | 80 |
| 0018 | Pi | .30 | 50 | .23 | 4 | 29 | 44 | 62 | 73 | 80 | 80 | 80 | 80 | 2 | 27 | 42 | 60 | 71 | 80 | 80 | 80 | 80 |
| 0019 | $L_2$ | .30 | 150 | .23 | NA | 6 | 13 | 25 | 32 | 44 | 60 | 60 | 60 | NA | 4 | 11 | 23 | 30 | 42 | 60 | 60 | 60 |
| 0020 | $L_2$ | .30 | 150 | .23 | NA | 6 | 13 | 25 | 32 | 44 | 60 | 60 | 60 | NA | 4 | 11 | 23 | 30 | 42 | 60 | 60 | 60 |
| 0021 | $L_1$ | .30 | 150 | .23 | NA | 6 | 13 | 25 | 32 | 44 | 60 | 60 | 60 | NA | 4 | 11 | 23 | 30 | 42 | 60 | 60 | 60 |
| 0022 | $L_1$ | .30 | 150 | .23 | NA | 6 | 13 | 25 | 32 | 44 | 60 | 60 | 60 | NA | 4 | 11 | 23 | 30 | 42 | 60 | 60 | 60 |
| 0023 | Pi | .30 | 150 | .23 | NA | 8 | 24 | 43 | 53 | 70 | 70 | 70 | 70 | NA | 6 | 22 | 41 | 51 | 69 | 70 | 70 | 70 |
| 0024 | Pi | .30 | 150 | .23 | NA | 8 | 24 | 43 | 53 | 70 | 70 | 70 | 70 | NA | 6 | 22 | 41 | 51 | 69 | 70 | 70 | 70 |
| 0025 | $L_2$ | .50 | 50 | .18 | 5 | 12 | 19 | 29 | 36 | 48 | 69 | 70 | 70 | 3 | 10 | 17 | 27 | 34 | 46 | 67 | 70 | 70 |
| 0026 | $L_2$ | .50 | 50 | .18 | 5 | 12 | 19 | 29 | 36 | 48 | 69 | 70 | 70 | 3 | 10 | 17 | 27 | 34 | 46 | 67 | 70 | 70 |
| 0027 | $L_1$ | .50 | 50 | .18 | 5 | 12 | 19 | 29 | 36 | 48 | 69 | 70 | 70 | 3 | 10 | 17 | 27 | 34 | 46 | 67 | 70 | 70 |
| 0028 | $L_1$ | .50 | 50 | .18 | 5 | 12 | 19 | 29 | 36 | 48 | 69 | 70 | 70 | 3 | 10 | 17 | 27 | 34 | 46 | 67 | 70 | 70 |
| 0029 | Pi | .50 | 50 | .18 | NA | 21 | 37 | 56 | 67 | 80 | 80 | 80 | 80 | NA | 19 | 35 | 54 | 65 | 78 | 80 | 80 | 80 |
| 0030 | Pi | .50 | 50 | .18 | NA | 21 | 37 | 56 | 67 | 80 | 80 | 80 | 80 | NA | 19 | 35 | 54 | 65 | 78 | 80 | 80 | 80 |

See footnote at end of table.





Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:15Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

| Dash no. | Cir-cuit | Max rated current (amp) | Rated dc voltage (volts) | Max voltage drop (volts) | Minimum insertion loss (dB) in accordance with MIL-STD-220 1/ | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | At 25°C | | | | | | | | | At -55°C and +125°C | | | | | | | |
| | | | | | 15 kHz | 30 kHz | 50 kHz | 100 kHz | 150 kHz | 300 kHz | 1 MHz | 10 MHz | 1 GHz | 15 kHz | 30 kHz | 50 kHz | 100 kHz | 150 kHz | 300 kHz | 1 MHz | 10 MHz | 1 GHz |
| 0031 | $L_2$ | .50 | 150 | .18 | NA | 3 | 9 | 20 | 26 | 39 | 59 | 60 | 60 | NA | 1 | 7 | 18 | 24 | 37 | 57 | 60 | 60 |
| 0032 | $L_2$ | .50 | 150 | .18 | NA | 3 | 9 | 20 | 26 | 39 | 59 | 60 | 60 | NA | 1 | 7 | 18 | 24 | 37 | 57 | 60 | 60 |
| 0033 | $L_1$ | .50 | 150 | .18 | NA | 3 | 9 | 20 | 26 | 39 | 59 | 60 | 60 | NA | 1 | 7 | 18 | 24 | 37 | 57 | 60 | 60 |
| 0034 | $L_1$ | .50 | 150 | .18 | NA | 3 | 9 | 20 | 26 | 39 | 59 | 60 | 60 | NA | 1 | 7 | 18 | 24 | 37 | 57 | 60 | 60 |
| 0035 | Pi | .50 | 150 | .18 | NA | NA | 15 | 37 | 48 | 66 | 70 | 70 | 70 | NA | NA | 13 | 35 | 46 | 64 | 70 | 70 | 70 |
| 0036 | Pi | .50 | 150 | .18 | NA | NA | 15 | 37 | 48 | 66 | 70 | 70 | 70 | NA | NA | 13 | 35 | 46 | 64 | 70 | 70 | 70 |
| 0037 | $L_2$ | 1.0 | 50 | .14 | 5 | 11 | 15 | 21 | 26 | 36 | 55 | 70 | 70 | 3 | 9 | 13 | 19 | 24 | 34 | 53 | 70 | 70 |
| 0038 | $L_2$ | 1.0 | 50 | .14 | 5 | 11 | 15 | 21 | 26 | 36 | 55 | 70 | 70 | 3 | 9 | 13 | 19 | 24 | 34 | 53 | 70 | 70 |
| 0039 | $L_1$ | 1.0 | 50 | .14 | 5 | 11 | 15 | 21 | 26 | 36 | 55 | 70 | 70 | 3 | 9 | 13 | 19 | 24 | 34 | 53 | 70 | 70 |
| 0040 | $L_1$ | 1.0 | 50 | .14 | 5 | 11 | 15 | 21 | 26 | 36 | 55 | 70 | 70 | 3 | 9 | 13 | 19 | 24 | 34 | 53 | 70 | 70 |
| 0041 | Pi | 1.0 | 50 | .14 | NA | NA | 20 | 41 | 52 | 71 | 80 | 80 | 80 | NA | NA | 18 | 39 | 50 | 69 | 80 | 80 | 80 |
| 0042 | Pi | 1.0 | 50 | .14 | NA | NA | 20 | 41 | 52 | 71 | 80 | 80 | 80 | NA | NA | 18 | 39 | 50 | 69 | 80 | 80 | 80 |
| 0043 | $L_2$ | 1.0 | 150 | .14 | NA | 3 | 6 | 12 | 16 | 26 | 46 | 60 | 60 | NA | 1 | 4 | 10 | 14 | 24 | 44 | 60 | 60 |
| 0044 | $L_2$ | 1.0 | 150 | .14 | NA | 3 | 6 | 12 | 16 | 26 | 46 | 60 | 60 | NA | 1 | 4 | 10 | 14 | 24 | 44 | 60 | 60 |
| 0045 | $L_1$ | 1.0 | 150 | .14 | NA | 3 | 6 | 12 | 16 | 26 | 46 | 60 | 60 | NA | 1 | 4 | 10 | 14 | 24 | 44 | 60 | 60 |
| 0046 | $L_1$ | 1.0 | 150 | .14 | NA | 3 | 6 | 12 | 16 | 26 | 46 | 60 | 60 | NA | 1 | 4 | 10 | 14 | 24 | 44 | 60 | 60 |
| 0047 | Pi | 1.0 | 150 | .14 | NA | NA | NA | 18 | 32 | 51 | 70 | 70 | 70 | NA | NA | NA | 16 | 30 | 49 | 68 | 70 | 70 |
| 0048 | Pi | 1.0 | 150 | .14 | NA | NA | NA | 18 | 32 | 51 | 70 | 70 | 70 | NA | NA | NA | 16 | 30 | 49 | 68 | 70 | 70 |
| 0049 | $L_2$ | 2.0 | 50 | .14 | 5 | 10 | 14 | 20 | 24 | 32 | 48 | 70 | 70 | 3 | 8 | 12 | 18 | 22 | 30 | 46 | 70 | 70 |
| 0050 | $L_2$ | 2.0 | 50 | .14 | 5 | 10 | 14 | 20 | 24 | 32 | 48 | 70 | 70 | 3 | 8 | 12 | 18 | 22 | 30 | 46 | 70 | 70 |
| 0051 | $L_1$ | 2.0 | 50 | .14 | 5 | 10 | 14 | 20 | 24 | 32 | 48 | 70 | 70 | 3 | 8 | 12 | 18 | 22 | 30 | 46 | 70 | 70 |
| 0052 | $L_1$ | 2.0 | 50 | .14 | 5 | 10 | 14 | 20 | 24 | 32 | 48 | 70 | 70 | 3 | 8 | 12 | 18 | 22 | 30 | 46 | 70 | 70 |
| 0053 | Pi | 2.0 | 50 | .14 | NA | NA | NA | 33 | 46 | 65 | 80 | 80 | 80 | NA | NA | NA | 31 | 44 | 63 | 80 | 80 | 80 |
| 0054 | Pi | 2.0 | 50 | .14 | NA | NA | NA | 33 | 46 | 65 | 80 | 80 | 80 | NA | NA | NA | 31 | 44 | 63 | 80 | 80 | 80 |
| 0055 | $L_2$ | 2.0 | 150 | .14 | NA | 3 | 5 | 11 | 15 | 23 | 38 | 60 | 60 | NA | 1 | 3 | 9 | 13 | 21 | 36 | 60 | 60 |
| 0056 | $L_2$ | 2.0 | 150 | .14 | NA | 3 | 5 | 11 | 15 | 23 | 38 | 60 | 60 | NA | 1 | 3 | 9 | 13 | 21 | 36 | 60 | 60 |
| 0057 | $L_1$ | 2.0 | 150 | .14 | NA | 3 | 5 | 11 | 15 | 23 | 38 | 60 | 60 | NA | 1 | 3 | 9 | 13 | 21 | 36 | 60 | 60 |
| 0058 | $L_1$ | 2.0 | 150 | .14 | NA | 3 | 5 | 11 | 15 | 23 | 38 | 60 | 60 | NA | 1 | 3 | 9 | 13 | 21 | 36 | 60 | 60 |
| 0059 | Pi | 2.0 | 150 | .14 | NA | NA | NA | NA | 22 | 45 | 70 | 70 | 70 | NA | NA | NA | NA | 20 | 43 | 70 | 70 | 70 |
| 0060 | Pi | 2.0 | 150 | .14 | NA | NA | NA | NA | 22 | 45 | 70 | 70 | 70 | NA | NA | NA | NA | 20 | 43 | 70 | 70 | 70 |

1/ Full load insertion loss measurements shall be performed at frequencies between 100 kHz to 10 MHz inclusive; all other measurements shall be performed at no-load.





Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Case and mounting hardware finish: In accordance with MIL-PRF-15733. Pure tin finish is prohibited.

Terminals: Solder lug.

Operating temperature range: -55◦ to +125◦C.

Rated voltage: See table I.

Rated current: See table I.

Insertion-loss: In accordance with MIL-PRF-15733 and table I.

Seal: In accordance with MIL-PRF-15733.

Capacitance to ground: Not applicable.

Temperature rise: 25◦C, maximum.

Dielectric withstanding voltage: In accordance with MIL-PRF-15733 except the duration of application of voltage shall be 1 to 5 seconds.

Insulation resistance: In accordance with MIL-PRF-15733. The following details shall apply:

Test temperature: 25◦C.

Test potential: Rated dc voltage.

Insulation resistance: Shall be not less than 1,000 megohms.

Voltage drop: See table I.

Overload: In accordance with MIL-PRF-15733. After the filter has returned to room temperature, the insulation resistance and voltage drop measurements shall meet initial requirements.

Terminal strength: In accordance with MIL-PRF-15733 and Method 211, MIL-STD-202; Test condition A (pull):

Force: 5 pounds.

Salt atmosphere (corrosion): In accordance with MIL-PRF-15733 and Method 101, MIL-STD-202; Test condition B.

Shock (specified pulse): In accordance with MIL-PRF-15733 and Method 213, MIL-STD-202; Test condition I.

Vibration, high frequency: In accordance with MIL-PRF-15733 and Method 204, MIL-STD-202; Test condition D (20g).

Moisture resistance: In accordance with MIL-PRF-15733 except after the 24 hour drying period, insulation resistance shall meet initial requirement.

Life: In accordance with MIL-PRF-15733 and Method 108, MIL-STD-202, test condition D (1,000 hr) for qualification inspection; test condition B (250 hr) for group C inspection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:15Z
Check the source to verify that this is the current version before use.

Part or Identifying number (PIN): M15733/23-(dash number from table I).

Initial qualification to MIL-PRF-15733/23 may be granted based on qualification to MIL-PRF-28861/3 and MIL-PRF-28861/4 as indicated in table II. Extension of qualification from MIL-PRF-28861/3 and MIL-PRF-28861/4 to MIL-PRF-15733/23 is permissible under the following provisions:

a. The MIL-PRF-15733/23 parts use the same design and dielectric characteristics as the MIL-PRF-28861/3 and MIL-PRF-28861/4 parts.

b. The MIL-PRF-28861/3 and MIL-PRF-28861/4 qualification data verifies that the physical and electrical characteristics of the MIL-PRF-15733/23 parts are satisfied.

TABLE II. Extension of qualification.

| Qualification to MIL-PRF-28861/3 | Will qualify MIL-PRF-15733/23 | | Qualification to MIL-PRF-28861/3 | Will qualify MIL-PRF-15733/23 |
|---|---|---|---|---|
| -020 | -0007 | | -007 | -0034 |
| -002 | -0008 | | -027 | -0035 |
| -019 | -0009 | | -009 | -0036 |
| -001 | -0010 | | -029 | -0043 |
| -021 | -0011 | | -011 | -0044 |
| -003 | -0012 | | -028 | -0045 |
| -023 | -0019 | | -010 | -0046 |
| -005 | -0020 | | -030 | -0047 |
| -022 | -0021 | | -012 | -0048 |
| -004 | -0022 | | -032 | -0055 |
| -024 | -0023 | | -014 | -0056 |
| -006 | -0024 | | -031 | -0057 |
| -026 | -0031 | | -013 | -0058 |
| -008 | -0032 | | -033 | -0059 |
| -025 | -0033 | | -015 | -0060 |
| | | | | |
| Qualification to MIL-PRF-28861/4 | Will qualify MIL-PRF-15733/23 | | Qualification to MIL-PRF-28861/4 | Will qualify MIL-PRF-15733/23 |
| -020 | -0001 | | -007 | -0028 |
| -002 | -0002 | | -027 | -0029 |
| -019 | -0003 | | -009 | -0030 |
| -001 | -0004 | | -029 | -0037 |
| -021 | -0005 | | -011 | -0038 |
| -003 | -0006 | | -028 | -0039 |
| -023 | -0013 | | -010 | -0040 |
| -005 | -0014 | | -030 | -0041 |
| -022 | -0015 | | -012 | -0042 |
| -004 | -0016 | | -032 | -0049 |
| -024 | -0017 | | -014 | -0050 |
| -006 | -0018 | | -031 | -0051 |
| -026 | -0025 | | -013 | -0052 |
| -008 | -0026 | | -033 | -0053 |
| -025 | -0027 | | -015 | -0054 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:15Z
Check the source to verify that this is the current version before use.

Supersession data: See table III.

TABLE III. Supersession data.

| Inactive PIN M15733/23- | Superseding specification | Superseding PIN M28861 | | Inactive PIN M15733/23- | Superseding specification | Superseding PIN M28861 |
|---|---|---|---|---|---|---|
| 0001 | MIL-PRF-28861/4 | /04-020 | | 0031 | MIL-PRF-28861/3 | /03-026 |
| 0002 | MIL-PRF-28861/4 | /04-002 | | 0032 | MIL-PRF-28861/3 | /03-008 |
| 0003 | MIL-PRF-28861/4 | /04-019 | | 0033 | MIL-PRF-28861/3 | /03-025 |
| 0004 | MIL-PRF-28861/4 | /04-001 | | 0034 | MIL-PRF-28861/3 | /03-007 |
| 0005 | MIL-PRF-28861/4 | /04-021 | | 0035 | MIL-PRF-28861/3 | /03-027 |
| 0006 | MIL-PRF-28861/4 | /04-003 | | 0036 | MIL-PRF-28861/3 | /03-009 |
| 0007 | MIL-PRF-28861/3 | /03-020 | | 0037 | MIL-PRF-28861/4 | /04-029 |
| 0008 | MIL-PRF-28861/3 | /03-002 | | 0038 | MIL-PRF-28861/4 | /04-011 |
| 0009 | MIL-PRF-28861/3 | /03-019 | | 0039 | MIL-PRF-28861/4 | /04-028 |
| 0010 | MIL-PRF-28861/3 | /03-001 | | 0040 | MIL-PRF-28861/4 | /04-010 |
| 0011 | MIL-PRF-28861/3 | /03-021 | | 0041 | MIL-PRF-28861/4 | /04-030 |
| 0012 | MIL-PRF-28861/3 | /03-003 | | 0042 | MIL-PRF-28861/4 | /04-012 |
| 0013 | MIL-PRF-28861/4 | /04-023 | | 0043 | MIL-PRF-28861/3 | /03-029 |
| 0014 | MIL-PRF-28861/4 | /04-005 | | 0044 | MIL-PRF-28861/3 | /03-011 |
| 0015 | MIL-PRF-28861/4 | /04-022 | | 0045 | MIL-PRF-28861/3 | /03-028 |
| 0016 | MIL-PRF-28861/4 | /04-004 | | 0046 | MIL-PRF-28861/3 | /03-010 |
| 0017 | MIL-PRF-28861/4 | /04-024 | | 0047 | MIL-PRF-28861/3 | /03-030 |
| 0018 | MIL-PRF-28861/4 | /04-006 | | 0048 | MIL-PRF-28861/3 | /03-012 |
| 0019 | MIL-PRF-28861/3 | /03-023 | | 0049 | MIL-PRF-28861/4 | /04-032 |
| 0020 | MIL-PRF-28861/3 | /03-005 | | 0050 | MIL-PRF-28861/4 | /04-014 |
| 0021 | MIL-PRF-28861/3 | /03-022 | | 0051 | MIL-PRF-28861/4 | /04-031 |
| 0022 | MIL-PRF-28861/3 | /03-004 | | 0052 | MIL-PRF-28861/4 | /04-013 |
| 0023 | MIL-PRF-28861/3 | /03-024 | | 0053 | MIL-PRF-28861/4 | /04-033 |
| 0024 | MIL-PRF-28861/3 | /03-006 | | 0054 | MIL-PRF-28861/4 | /04-015 |
| 0025 | MIL-PRF-28861/4 | /04-026 | | 0055 | MIL-PRF-28861/3 | /03-032 |
| 0026 | MIL-PRF-28861/4 | /04-008 | | 0056 | MIL-PRF-28861/3 | /03-014 |
| 0027 | MIL-PRF-28861/4 | /04-025 | | 0057 | MIL-PRF-28861/3 | /03-031 |
| 0028 | MIL-PRF-28861/4 | /04-007 | | 0058 | MIL-PRF-28861/3 | /03-013 |
| 0029 | MIL-PRF-28861/4 | /04-027 | | 0059 | MIL-PRF-28861/3 | /03-033 |
| 0030 | MIL-PRF-28861/4 | /04-009 | | 0060 | MIL-PRF-28861/3 | /03-015 |

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5915-0412-04)

Review activities:
Army - AR, AT, AV, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:15Z
Check the source to verify that this is the current version before use.