NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


PERFORMANCE SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL13

(B) The following part numbers are inactive for new design as of 30 September 1987: M15733/25-0001 through -0006, M15733/25-0008 through -0011, M15733/25-0013 through -0018, and M15733/25-0020 through -0023. See table III for supersession data.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.

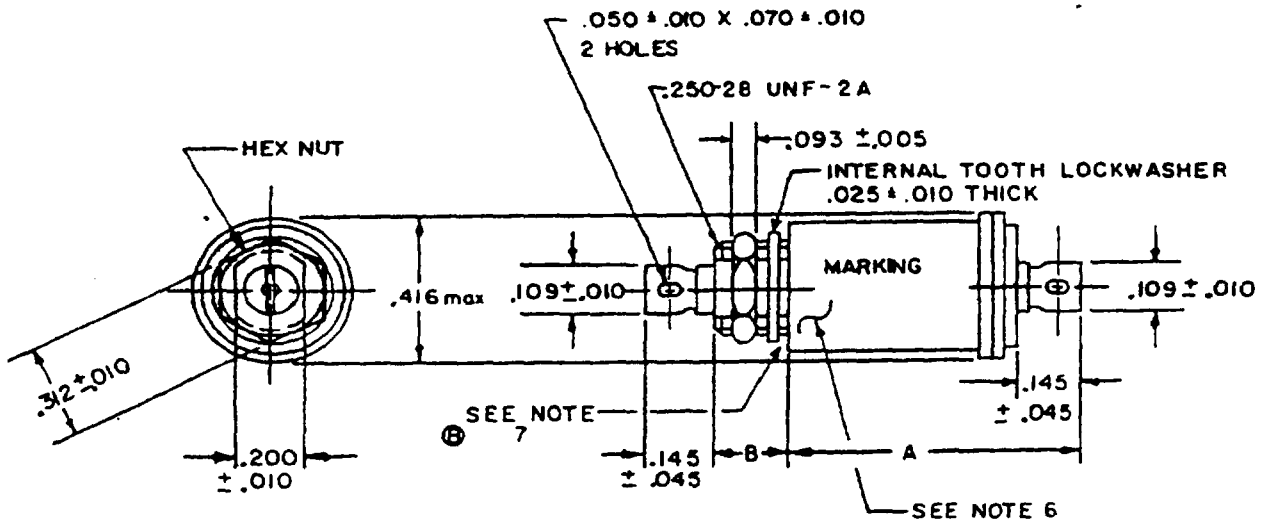


Dimension		
B ±.015		
.187	.312	A max
Dash no.	Dash no.	
0001	0013	.743
0002	0014	.793
0003	0015	.728
0004	0016	.793
0005	0017	.743
0006	0018	.793
0007	0019	1.345
0008	0020	.738
0009	0021	.743
0010	0022	.793
0011	0023	.738
0012	0024	1.179

FIGURE 1. Case dimensions and circuit diagrams

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

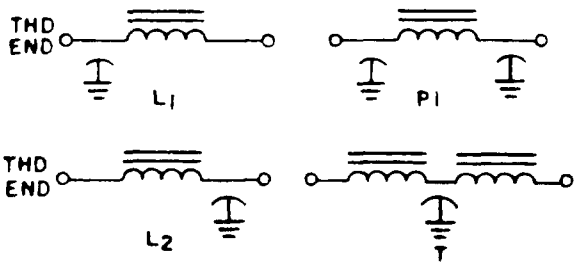

CIRCUIT DIAGRAMS

Inches	mm	Inches	mm
.005	.13	.145	3.68
.010	.25	.187	4.75
.015	.38	.200	5.08
.025	.64	.312	7.92
.045	1.14	.416	10.57
.050	1.27	.738	18.75
.070	1.78	.743	18.87
.093	2.36	.793	20.14
.109	2.77	1.179	29.95
		1.345	34.16

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. All filters shall be supplied with mounting hardware.
5. Use of style FL13 with or without shoulder is optional.
6. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter, with the letter "C" or "L", as follows:

Letter	Circuit
C	L_1
L	L_2

Ⓑ 7. Imperfect threads or undercut permitted out to a maximum of .052 (1.32 mm) from the mounting surface.

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Dash numbers and electrical characteristics.

Dash number		Circuit diagram	Maximum rated current (amperes)	Maximum voltage drop (volts)	Minimum insertion loss 1/ (dB) in accordance with MIL-STD-220																	
					At +25°C						At -55°C						At +125°C					
Dimension B					75 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 and 2 GHz	75 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 and 2 GHz	75 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 and 2 GHz
.187	.312																					
0001	0013	L_1	1.0	.250	15	23	34	55	70	70	14	22	33	54	70	70	14	23	34	55	70	70
0002	0014	Pi	1.0	.250	---	33	52	80	80	70	---	31	50	80	80	70	---	31	50	80	80	70
0003	0015	L_2	1.0	.250	15	23	34	55	70	70	14	22	33	54	70	70	14	23	34	55	70	70
0004	0016	Pi	3.0	.150	---	17	34	68	80	70	---	15	32	66	80	70	---	15	33	65	80	70
0005	0017	L_1	5.0	.075	11	17	23	35	69	70	10	16	22	34	68	70	10	16	22	34	69	70
0006	0018	Pi	5.0	.075	---	---	17	57	80	70	---	---	13	55	80	70	---	---	16	55	80	70
0007	0019	T	4.0	.250	16	22	28	43	80	70	15	21	27	42	80	70	14	20	27	43	80	70
0008	0020	L_2	5.0	.075	11	17	23	35	69	70	10	16	22	34	68	70	10	16	22	34	69	70
0009	0021	L_1	.25	.375	24	35	47	68	70	70	23	35	47	67	70	70	23	34	46	67	70	70
0010	0022	Pi	.25	.375	31	48	66	80	80	70	29	46	64	80	80	70	28	45	63	80	80	70
0011	0023	L_2	.25	.375	24	35	47	68	70	70	23	35	47	67	70	70	23	34	46	67	70	70
0012	0024	T	2.0	.200	16	22	31	55	80	70	15	21	30	54	80	70	14	21	30	53	80	70

1/ Full load insertion loss measurements shall be performed at frequencies between 150 kHz to 10 MHz inclusive; all other measurements shall be performed at no-load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case: Metal.

Terminals: Solder lug.

Operating temperature range: -55°C to +125°C.

Rated voltage: 100 volts dc.

Rated current: See table I.

Ⓑ Insertion loss: See table I.

Creepage and clearance: Not applicable.

Seal: Method 112, test condition A, MIL-STD-202.

Capacitance to ground: Not applicable.

Temperature rise: 25°C, maximum.

Dielectric withstanding voltage: Method 301, MIL-STD-202.

Test temperature: 25°C.

Test voltage: 2.5 times the rated voltage between each terminal and ground for a period of 1 to 5 seconds.

Maximum charging current: 50 milliamperes.

Barometric pressure (reduced): Method 105, test condition B (50,000 feet), MIL-STD-202.

Dielectric withstanding voltage: 125 percent of the rated voltage.

Maximum charging current: 50 milliamperes.

Insulation resistance: Method 302, MIL-STD-202.

Test temperature: 25°C.

Test potential: Rated dc voltage.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 1,000 megohms.

Voltage drop: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Insertion loss (check test): In accordance with MIL-F-15733.

Overload: Filters shall be suspended by their terminals in free air at an ambient temperature of 25°C ±5°C. A test current of 140 percent of rated current shall be applied for 15 minutes. After the filter has returned to room temperature, insulation resistance and voltage drop measurements shall meet initial requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

Terminal strength: Method 211, test condition A (pull), MIL-STD-202.

Force: 5 pounds.

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202.

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be +125°C.

Immersion: Method 104, test condition A, MIL-STD-202.

Measurements after final cycling:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of the initial requirement.

Insertion loss (check test): Shall meet the initial requirements.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Electrical load: 100 percent of the rated voltage shall be applied between terminals and case.

Vibration, high frequency: Method 204, test condition D (20g), MIL-STD-202.

Electrical load: Rated voltage and current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open or short-circuiting.

After vibration test: Filters shall be subjected to and shall meet the initial requirements of the insertion loss (check test).

Moisture resistance: Method 107, test condition A, MIL-STD-202, except that the temperature of step 3 shall be +125°C. No measurements shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.

Initial measurements: Not applicable.

Polarization voltage: 100 volts dc.

Measurements after 24-hour drying period:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall meet the initial requirements.

Insertion loss (check test): Shall meet the initial requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

Life: Method 108, MIL-STD-202, test condition D (1,000 hours) for qualification inspection; test condition B (250 hours) for group C inspection.

Test temperature: +125°C.

Test voltage: 1.4 times rated dc voltage.

Measurements after test:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 +1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of the initial requirement.

Insertion loss (check test): Shall meet the initial requirements.

Part number: M15733/25-(dash number from table I).

Ⓑ Initial qualification to MIL-F-15733/25 may be granted based on qualification to MIL-F-28861/2 as indicated in table II. Extension of qualification from MIL-F-28861/2 is permissible under the following provisions:

a. The MIL-F-15733/25 parts use the same design and dielectric characteristics as the MIL-F-28861/2 parts.

b. The MIL-F-28861/2 qualification data verifies that the physical and electrical characteristics of the MIL-F-15733/25 parts are satisfied.

TABLE II. Extension of qualification.

Qualification to MIL-F-28861/2	Will qualify MIL-F-15733/25	Qualification to MIL-F-28861/2	Will qualify MIL-F-15733/25
-001	-0009	-013	-0021
-002	-0011	-014	-0023
-003	-0010	-015	-0022
-004	-0001	-016	-0013
-005	-0003	-017	-0015
-006	-0002	-018	-0014
-009	-0004	-021	-0016
-010	-0005	-022	-0017
-011	-0008	-023	-0020
-012	-0006	-024	-0018

Ⓑ Supersession data: See table III.

TABLE III. Supersession data.

Superseded military part number	Superseding specification	Superseding military part number
M15733/25-0001	MIL-F-28861/2	M28861/02-004TB
M15733/25-0002	MIL-F-28861/2	M28861/02-006TB
M15733/25-0003	MIL-F-28861/2	M28861/02-005TB
M15733/25-0004	MIL-F-28861/2	M28861/02-009TB
M15733/25-0005	MIL-F-28861/2	M28861/02-010TB
M15733/25-0006	MIL-F-28861/2	M28861/02-012TB
M15733/25-0008	MIL-F-28861/2	M28861/02-011TB

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

TABLE III. Supersession data - Continued.

Superseded military part number	Superseding specification	Superseding military part number
M15733/25-0009	MIL-F-28861/2	M28861/02-001TB
M15733/25-0010	MIL-F-28861/2	M28861/02-003TB
M15733/25-0011	MIL-F-28861/2	M28861/02-002TB
M15733/25-0013	MIL-F-28861/2	M28861/02-016TB
M15733/25-0014	MIL-F-28861/2	M28861/02-018TB
M15733/25-0015	MIL-F-28861/2	M28861/02-017TB
M15733/25-0016	MIL-F-28861/2	M28861/02-021TB
M15733/25-0017	MIL-F-28861/2	M28861/02-022TB
M15733/25-0018	MIL-F-28861/2	M28861/02-024TB
M15733/25-0020	MIL-F-28861/2	M28861/02-023TB
M15733/25-0021	MIL-F-28861/2	M28861/02-013TB
M15733/25-0022	MIL-F-28861/2	M28861/02-015TB
M15733/25-0023	MIL-F-28861/2	M28861/02-014TB

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0324)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.