NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-15733/26B
17 June 1982
SUPERSEDING
MIL-F-15733/26A
24 June 1981

PERFORMANCE SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL14

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.

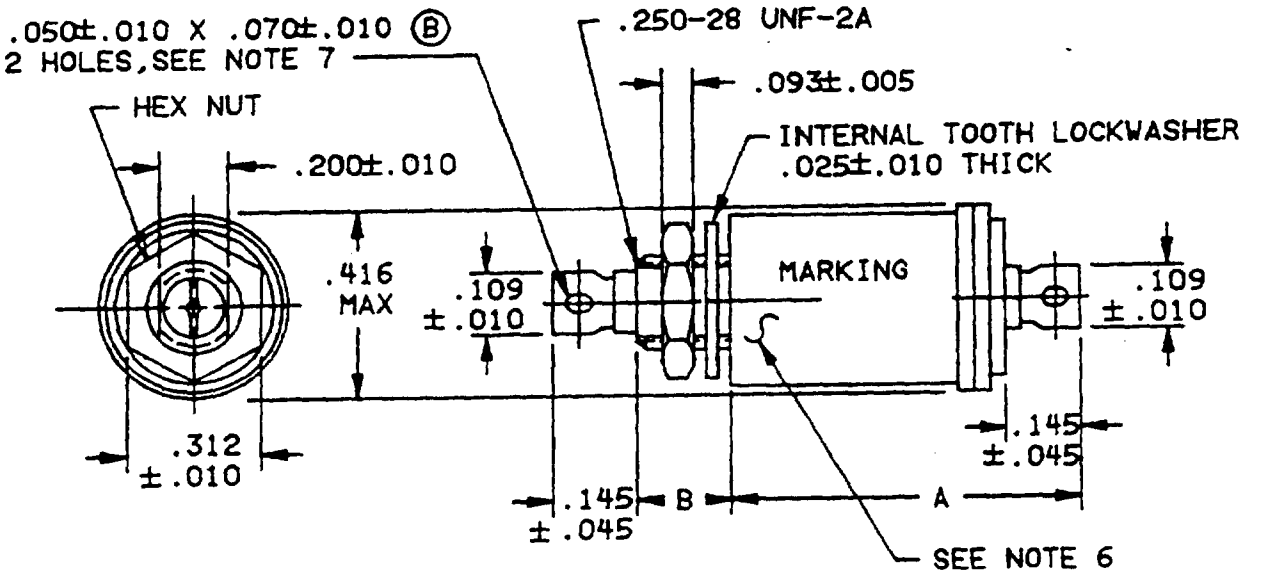


Dimension		
B ±.011		
.187	.312	A max
Dash no.	Dash no.	
0001	0013	.743
0002	0014	.793
0003	0015	.738
0004	0016	.743
0005	0017	.793
0006	0018	.738
0007	0019	.743
0008	0020	1.345
0009	0021	.793
0010	0022	.738
0011	0023	.793
0012	0024	1.179

FIGURE 1. Case dimensions and circuit diagrams

Ⓑ denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

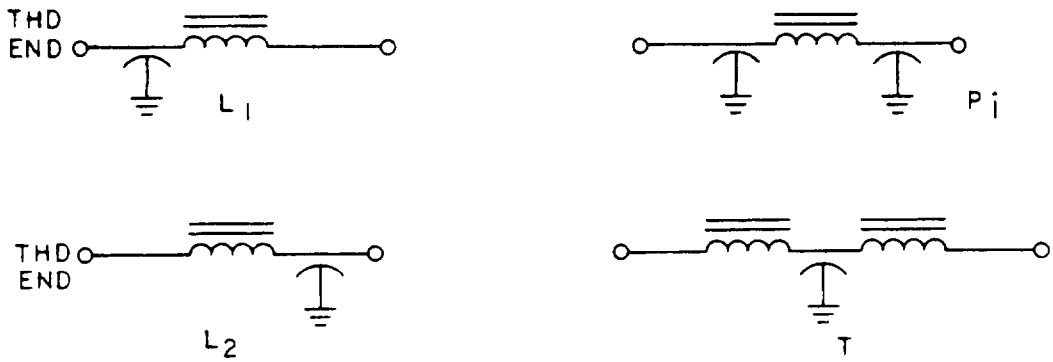

CIRCUIT DIAGRAM

INCHES	MM	INCHES	MM
.005	.13	.145	3.68
.010	.25	.187	4.75
.015	.38	.200	5.08
.025	.64	.312	7.92
.045	1.14	.416	10.57
.050	1.27	.738	18.75
.070	1.78	.743	18.87
.093	2.36	.793	20.14
.109	2.77	1.179	29.95
		1.345	34.16

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Circuit diagram is for information only.
4. All filters shall be supplied with mounting hardware.
5. Use of style FL14 with or without shoulder is optional.
6. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter, with the letter "C" or "L", as follows:

Letter	Circuit
C - - - - - - - - - -	L_1
L - - - - - - - - - -	L_2

(B) 7. Optional terminal hole, .070 +.010 inches may be supplied.

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

(B) TABLE I. Dash numbers and electrical characteristics.

Dash number		Circuit diagram	Maximum rated current (amperes) (rms)	Voltage drop (volts) (rms) max	Minimum insertion loss 1/ (dB) in accordance with MIL-STD-220															
Dimension B					At +25°C					At -55°C					At +125°C					
.187	.312				150 kHz	300 kHz	1 MHz	10 MHz	1 & 2 GHz	150 kHz	300 kHz	1 MHz	10 MHz	1 & 2 GHz	150 kHz	300 kHz	1 MHz	10 MHz	1 & 2 GHz
0001	0013	L_1	1.00	.250	13	24	45	80	70	12	23	44	80	70	12	24	44	80	70
0002	0014	Pi	1.00	.250	11	32	63	80		9	30	61	80		12	30	62	80	
0003	0015	L_2	1.00	.250	13	24	45	80		12	23	44	80		12	24	44	80	
0004	0016	L_1	3.00	.150	8	15	30	68		7	14	29	67		7	13	30	67	
0005	0017	Pi	3.00	.150	5	6	47	80		5	3	45	80		4	6	46	80	
0006	0018	L_2	3.00	.150	8	15	30	68		7	14	29	67		7	13	30	67	
0007	0019	L_1	5.00	.075	8	14	25	58		7	13	24	57		7	12	24	59	
0008	0020	T	4.00	.250	11	18	33	80		10	17	32	80		10	17	33	80	
0009	0021	Pi	5.00	.075	7	10	35	80		7	9	34	80		6	8	34	80	
0010	0022	L_2	5.00	.075	8	14	25	58		7	13	24	57		7	12	24	59	
0011	0023	Pi	.25	.375	29	47	70	80		28	45	70	80		27	44	70	80	
0012	0024	T	2.00	.200	13	21	43	80		11	20	42	80		11	19	43	80	

1/ Full load insertion loss measurements shall be performed at frequencies between 150 kHz to 10 MHz inclusive; all other measurements shall be performed at no-load.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case: Metal.

Terminals: Solder lug.

Operating temperature range: -55° to +125°C; temperature characteristic D.

Rated voltage: 150 volts dc or 125 volts ac at 60 Hz and 400 Hz.

Rated current: See table I.

Insertion-loss characteristic: W (see table I).

Creepage and clearance: Not applicable.

Seal: Method 112, test condition A, MIL-STD-202.

Capacitance to ground: Not applicable.

Temperature rise: 25°C, maximum.

Dielectric withstanding voltage: Method 301, MIL-STD-202.

Test temperature: 25°C.

DC test voltage: 2.5 times the rated voltage between each terminal and ground for a period of 1 to 5 seconds.

Maximum charging current: 50 milliamperes.

Barometric pressure (reduced): Method 105, test condition B (50,000 ft), MIL-STD-202.

Dielectric withstanding voltage: 125 percent of the rated voltage.

Maximum charging current: 50 milliamperes.

Insulation resistance: Method 302, MIL-STD-202.

Test temperature: 25°C.

Test potential: Rated dc voltage.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 1,000 megohms.

Voltage drop: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Insertion loss (check test): In accordance with MIL-F-15733.

Overload: Filters shall be suspended by their terminals in free air at an ambient temperature of 25° ±5°C. A test current of 140 percent of rated current shall be applied for 15 minutes. After the filter has returned to room temperature, insulation resistance and voltage drop measurements shall meet initial requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

Terminal strength: Method 211, test condition A (pull), MIL-STD-202.

Force: 5 pounds.

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202.

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be +125°C.

Immersion: Method 104, test condition A, MIL-STD-202.

Measurements after final cycling:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of the initial requirement.

Insertion loss (check test): Shall meet the initial requirements.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Electrical load: 100 percent of the rated voltage shall be applied between terminals and case.

Vibration, high frequency: Method 204, test condition D (20G), MIL-STD-202.

Electrical load: Rated voltage and current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open or short-circuiting.

After vibration test: Filters shall be subjected to and shall meet the initial requirements of the insertion loss (check test).

Moisture resistance: Method 107, test condition A, MIL-STD-202, except that the temperature of step 3 shall be +125°C. No measurements shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.

Initial measurements: Not applicable.

Polarization voltage: 100 volts dc.

Measurements after 24-hour drying period:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall meet the initial requirements.

Insertion loss (check test): Shall meet the initial requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

Life: Method 108, MIL-STD-202, test condition D (1,000 hr) for qualification inspection; test condition B (250 hr) for group C inspection.

Test temperature: +125°C.

Test voltage: 1.2 times rated ac (rms) voltage.

Measurements after test:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of the initial requirement.

Insertion loss (check test): Shall meet the initial requirements.

(B) Low temperature power switching: Filters shall be tested using the circuit shown in figure 2. The following steps shall be used:

1. Chill the filters to -55°C and allow 15 minutes minimum for stabilization.
2. Apply 125 volts ac, 400 Hz, making voltage adjustments as quickly as possible to minimize device heating. Open switch 1 and allow the device under test to stabilize at -55°C.
3. Close switch 1 for approximately one second while monitoring the clamp on ammeter (M2) for an indication of high current (shorted filter capacitor). Any failed device must be identified and electrically removed from the test circuit.
4. Allow switch 1 to remain open for 30 seconds minimum.
5. Repeat the procedure of paragraph 3 and 4 a minimum of 20 times.
6. Allow the devices under test to stabilize at room conditions. Insulation resistance shall be measured and shall meet initial requirements.

(B) QUALITY ASSURANCE PROVISIONS


Qualification inspection: In accordance with MIL-F-15733.

Quality conformance inspection: In accordance with MIL-F-15733, except as follows:

Group B: Low temperature power switching shall be performed as an additional test following the overload test. Any sample failure on low temperature power switching test shall require a 100 percent reinspection of the lot for low temperature power switching. Sample units that fail low temperature power switching shall not be shipped.

Part number: M15733/26- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

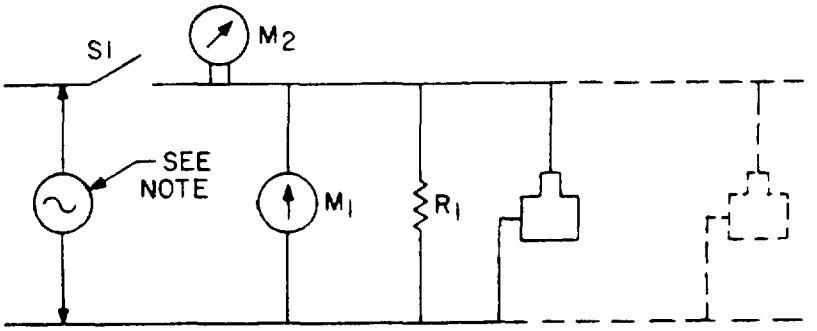

M_1 - AC voltmeter.
M_2 - Clamp-on ammeter.
R_1 - 100 ohms, 150 watts.

NOTE: Power supply shall be capable of delivering 2.0 amperes minimum, 125 volts ac at 400 Hz.

(B) FIGURE 2. Test circuit for low-temperature power switching test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, SH
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0243-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-15733/26B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12803 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Attn; ELEX 8111
Washington, DC 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.