NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-15733/27C
11 August 1986
SUPERSEDING
MIL-F-15733/27B
28 January 1985

PERFORMANCE SPECIFICATION SHEET

FILTERS AND CAPACITORS, RADIO FREQUENCY INTERFERENCE,
HERMETICALLY SEALED,
STYLE FL15

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.

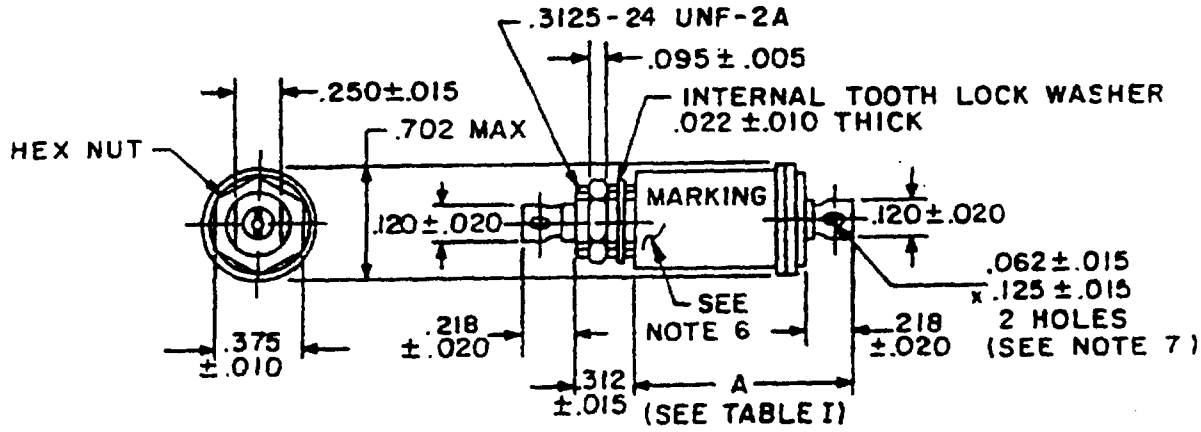


FOR DASH NUMBERS 0001 THROUGH 0013
AND 0016 THROUGH 0027

Inches	mm	Inches	mm
.005	0.13	.125	3.18
.010	0.25	.188	4.78
.015	0.38	.218	5.54
.020	0.51	.250	6.35
.022	0.56	.312	7.92
.041	1.04	.3125	7.938
.042	1.07	.375	9.53
.062	1.57	.441	11.20
.095	2.41	.702	17.83


FIGURE 1. Case dimensions and circuit diagrams.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

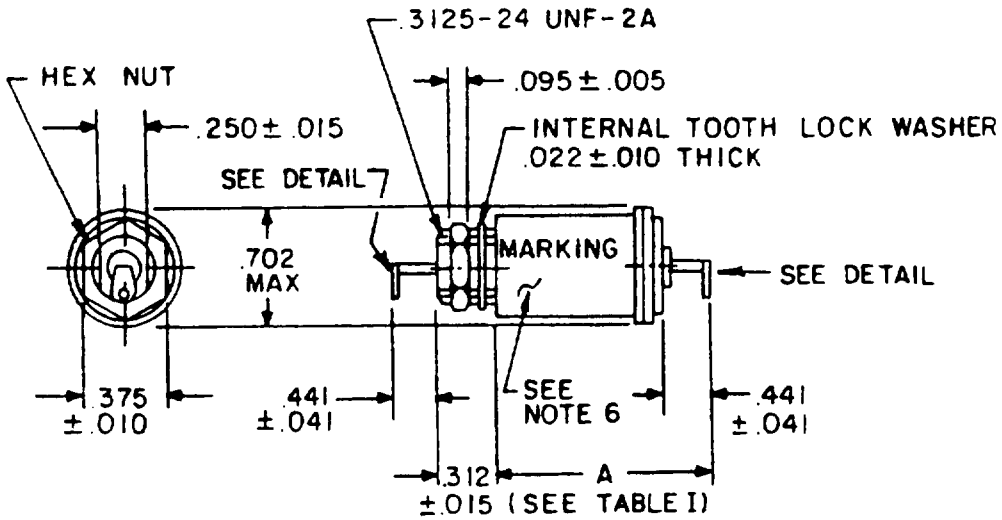


FOR DASH NUMBERS 0014 AND 0015



L TERMINAL TO ACCEPT NUMBER 12 AWG

DETAIL FOR TERMINAL

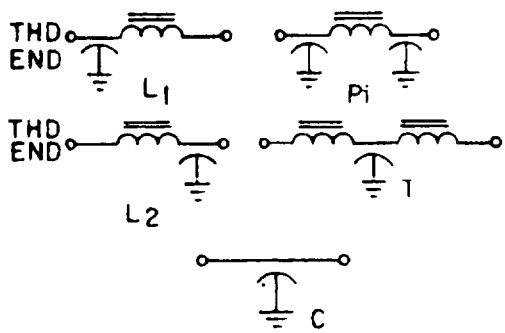

CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagrams are for information only.
4. All filters shall be supplied with mounting hardware.
5. Use of style FL15 with or without shoulder is optional.
6. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter with the symbol "C" or "L" as follows:

Symbol	Circuit
C	L_1
L	L_2

7. Optional terminal hole of .070 ±.010 (1.78 ±0.25 mm) inch may be supplied.

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Circuit diagram	Dimension A (max) (inches) 1/	Max rated current (amperes, rms)	Max voltage drop (volts, ac rms)	Max voltage drop volts, dc	Capacitance µF -0, +150 percent	Min full-load insertion loss (dB) in accordance with MIL-STD-220 2/													
							At +25°C								At -55°C and +125°C					
							50 kHz	100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz	50 kHz	100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0001	L_1	.900	1.00	.4	.27	.25	11	18	25	37	58	80	70	70	10	17	24	36	57	80	70	70
0002	L_2	.900	"	.4	"	.25	11	18	25	37	58	"	"	"	10	17	24	36	57	"	"	"
0003	P1	1.031	"	.4	"	.5	20	32	43	61	80	"	"	"	18	30	41	60	80	"	"	"
0004	P1	1.195	"	.35	.25	.5	20	36	47	65	80	"	"	"	18	34	45	63	80	"	"	"
0005	L_1	.900	3.00	.15	.10	.25	5	10	14	21	39	"	"	"	4	9	13	20	39	"	"	"
0006	L_2	.900	3.00	.15	.10	.25	"	"	14	21	39	"	"	"	4	9	13	20	39	"	"	"
0007	P1	1.031	3.00	.15	.15	.5	"	"	19	42	74	"	"	"	5	2	16	40	72	"	"	"
0008	L_1	.900	5.00	.10	.08	.25	"	"	13	19	32	69	"	"	4	9	12	18	31	68	"	"
0009	L_2	.900	5.00	.10	.08	.25	"	"	13	19	32	69	"	"	4	9	12	18	31	68	"	"
0010	P1	1.195	5.00	.15	.12	.5	-	-	10	28	64	80	"	"	-	-	10	26	62	80	"	"
0011	L_1	1.031	10.00	.075	.05	.25	5	8	13	19	30	61	"	"	4	7	12	18	29	60	"	"
0012	L_2	1.031	10.00	"	.05	.25	5	8	13	19	30	61	"	"	4	7	12	18	29	60	"	"
0013	P1	1.195	10.00	.085	.075	.5	-	-	16	18	48	80	"	"	-	-	15	18	48	80	"	"
0014	L_1	1.763	15.00	.15	.10	.25	9	15	19	25	36	60	"	"	9	14	18	24	35	59	"	"
0015	L_2	1.763	15.00	.15	.10	"	9	15	19	25	36	60	"	"	9	14	18	24	35	59	"	"
0016	T	1.195	.70	.42	.4	"	19	28	38	56	80	80	"	"	17	27	37	55	80	80	"	"
0017	T	1.195	1.50	.225	.20	"	6	12	19	32	62	70	"	"	4	11	18	32	61	70	"	"
0018	T	1.195	4.00	.12	.10	"	6	11	14	21	36	70	"	"	5	10	13	19	35	70	"	"
0019	L_1	.900	2.00	.2	.10	"	5	11	15	25	45	80	"	"	4	10	14	24	44	80	"	"
0020	L_2	.900	"	.2	.10	"	5	11	15	25	45	"	"	"	4	10	14	24	44	"	"	"
0021	P1	1.031	"	.2	.15	.5	1	15	28	48	79	"	"	"	1	12	26	46	77	"	"	"
0022	P1	1.195	"	.22	.15	.5	4	24	36	54	80	"	"	"	2	21	34	52	80	"	"	"
0023	T	1.195	"	.17	.16	.25	5	11	15	25	51	70	"	"	4	10	14	24	49	70	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Dash number	Circuit diagram	Dimension A (max) (inches) 1/	Max rated current (amperes, rms)	Max voltage drop (volts, ac rms)	Max voltage drop (volts, dc)	Capacitance uF -0, +150 percent	Min full-load insertion loss (dB) in accordance with MIL-STD-220 2/																	
							At +25°C								At -55°C and +125°C									
							50 kHz	100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz	50 kHz	100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz		
0024	C	0.513	15	.075	.05	.45	8	15	19	25	36	55	65	65	7	14	18	24	35	55	65	65		
0025	C	0.701	25	.125	.10	.45	8	15	19	25	36	55	65	65	7	14	18	24	35	55	65	65		
0026	C	0.498	15	.075	.05	.25	8	11	13	18	27	45	65	65	7	10	12	16	26	45	65	65		
0027	C	0.687	15	.075	.05	.75	17	20	23	28	37	54	65	65	16	19	22	27	53	54	65	65		

1/ Metric equivalents are given in figure 1.

2/ Full load insertion loss measurements shall be performed at frequencies between 100 kHz to 10 MHz inclusive; all other measurements shall be performed at no load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Terminals: Solder lug.

Operating temperature range: -55°C to +125°C.

Rated voltage: 200 volts dc/125 volts ac from dc to 400 Hz, inclusive.

Rated current: See table I.

Creepage and clearance: Not applicable.

Seal: Method 112, test condition A or D of MIL-STD-202.

Capacitance to ground: See table I and the dissipation factor shall be 3.0 percent maximum.

Temperature rise: 25°C, maximum.

Insulation resistance: Method 302 of MIL-STD-202.

Test potential: Rated dc voltage ±10 percent.

Insulation resistance: 1,000 megohms minimum at 25°C.
100 megohms minimum at +125°C.

Voltage drop: See table I.

Insertion loss: At 25°C and at temperature extremes; see table I.

Terminal strength: Method 211, test condition A (pull) of MIL-STD-202.

Force: 5 pounds.

Salt spray (corrosion): Method 101, test condition A of MIL-STD-202.

Shock (specified pulse): Method 213, test condition I of MIL-STD-202.

Electrical load: 100 percent of rated voltage shall be applied between terminals and case.

Measurements after test: Insertion loss (check test).

Vibration, high frequency: Method 204, test condition D (20g) of MIL-STD-202.

Electrical load: Rated voltage and current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open- or short-circuiting.

After vibration test: Filters shall be visually examined for evidence of physical damage and shall be subjected to the insertion loss (check test).

Part number: M15733/27-(dash number from table I).

Extent of qualification: Qualification testing and approval to M15733/27-0013, M15733/27-0016, and M15733/27-0024 shall be sufficient to grant qualification approval to MIL-F-15733/27 all parts inclusive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.

Cataloging information: Dash numbers 0024 through 0027 shall be cataloged under FSC 5910 as feed-through capacitors. Dash numbers 0001 through 0023 shall be cataloged under FSC 5915 as radio frequency interference filters.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, SH
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 59GP-0053)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:16Z
Check the source to verify that this is the current version before use.