NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-15733/31E
26 July 1983
SUPERSEDING
MIL-F-15733/31D(USAF)
17 October 1980

PERFORMANCE SPECIFICATION SHEET


FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL83

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.

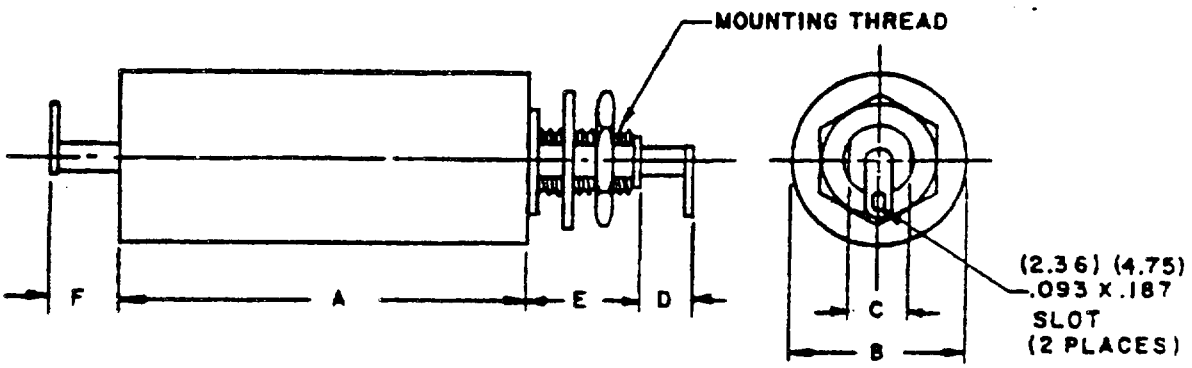

CONFIGURATION 1

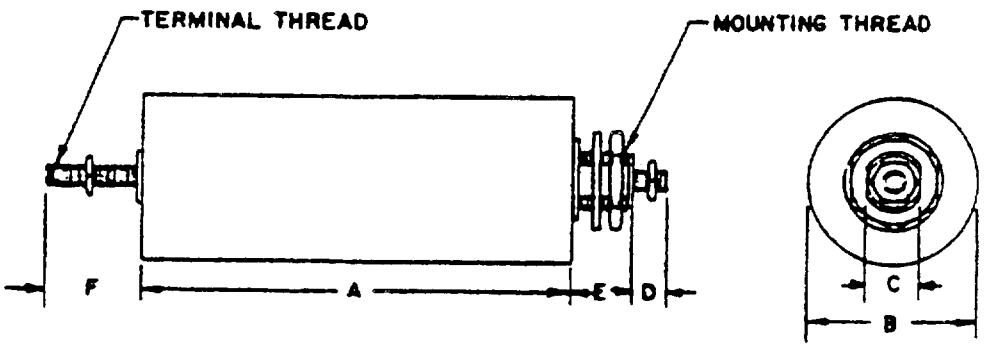


CONFIGURATION 2


FIGURE 1. Case dimensions and circuit diagrams

FSC 5915


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

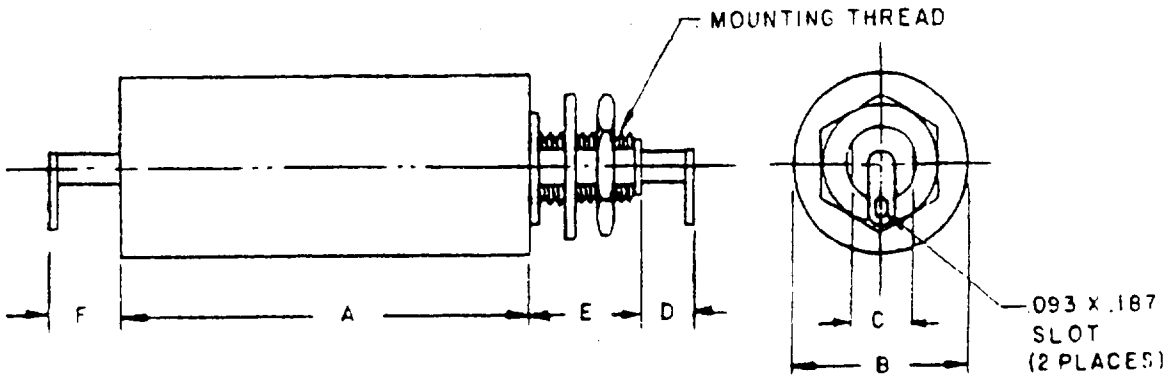

CONFIGURATION 3

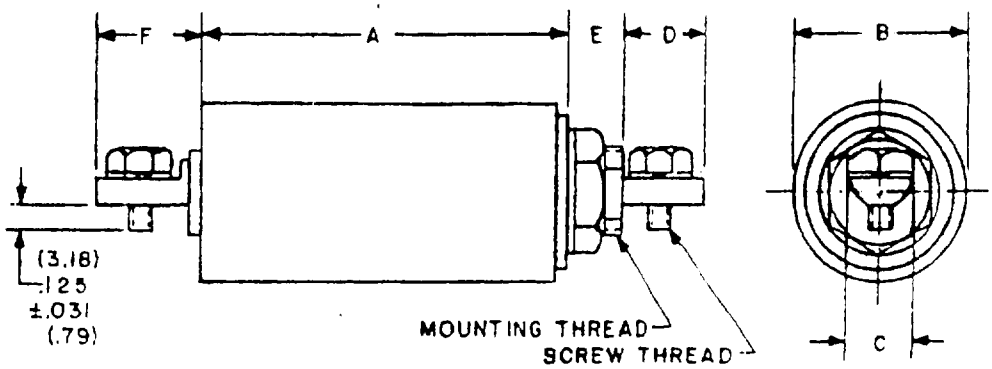


CONFIGURATION 4

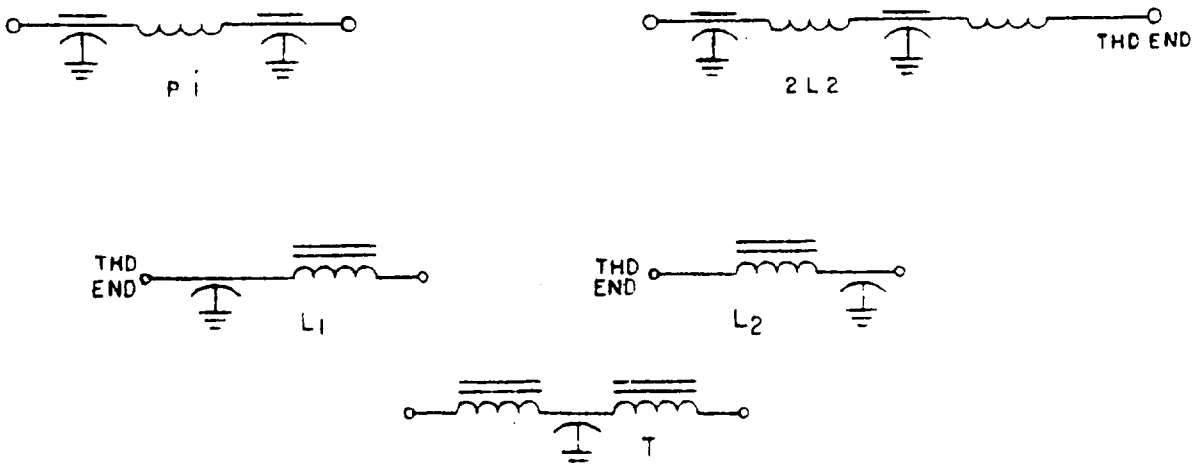

CIRCUIT DIAGRAMS

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

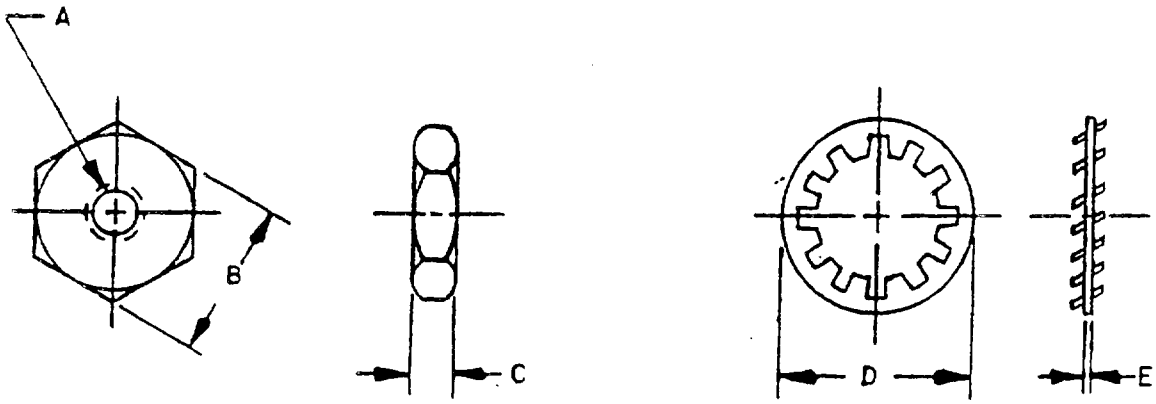

HEX NUT

LOCKWASHER

MOUNTING HARDWARE

Mounting Hardware

A THD	B ±.006 (.15)	C ±.003 (.08)	D ±.005 (.13)	E ±.005 (.13)
.3125 - 24 UNF - 2B	.437 (11.10)	.125 (3.18)	.430 (10.92)	.022 (.56)
.4375 - 20 UNF - 2B	.625 (15.88)	.125 (3.18)	.780 (19.81)	.035 (.89)
.6250 - 24 UNEF - 2B	.875 (22.22)	.156 (3.96)	.875 (22.22)	.022 (.56)
.7500 - 20 UNEF - 2B	1.062 (26.98)	.156 (3.96)	1.062 (26.98)	.022 (.56)
1.000 - 14 UNS - 2B	1.500 (38.10)	.187 (4.75)	1.614 (41.00)	.062 (1.57)
1.125 - 18 UNEF - 2B	1.625 (41.28)	.187 (4.75)	1.812 (46.02)	.062 (1.57)

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

Configuration No.	Dash No.	Weight ounces maximum	Dimensions								Terminal thread	Mounting thread	Screw thread
			A		B	C	D	E		F			
			Min	Max	Max	Max	Max	Min	Max	Max			
1	0001	13	3.81 (96.8)	3.93 (99.8)	1.50 (38.1)	.685 (17.40)	.50 (12.7)	.62 (15.7)	.74 (18.8)	.50 (12.7)	N/A	.750-20 UNEF-2A	N/A
2	0002	14	3.81 (96.8)	3.93 (99.8)	1.50 (38.1)	.685 (17.40)	.87 (22.1)	.62 (15.7)	.74 (18.8)	.87 (22.1)	.250-28 UNF-2A	.750-20 UNEF-2A	
1	0003	6	3.50 (88.9)	3.62 (91.9)	1.145 (29.08)	.380 (9.65)	.25 (6.4)	.420 (10.67)	.460 (11.68)	.25 (6.4)	N/A	.4375-20 UNF-2A	
3	0004	12	3.35 (85.1)	3.53 (89.7)	1.31 (33.3)	↓	.375 (9.52)	.422 (10.72)	.454 (11.53)	.28 (7.1)	↓	↓	↓
3	0005	5	2.59 (65.8)	2.79 (70.9)	1.06 (26.9)	↓	↓	.418 (10.62)	.458 (11.63)	.312 (7.92)	↓	↓	↓
3	0006	7	3.40 (86.4)	3.60 (91.4)	1.19 (30.2)	↓	↓	.418 (10.62)	.458 (11.63)	.312 (7.92)	↓	↓	↓
3	0007	12	3.65 (92.7)	3.85 (97.8)	1.56 (39.6)	.535 (13.59)	↓	.418 (10.62)	.458 (11.63)	.312 (7.92)	↓	.625-24 UNEF-2A	↓
4	0008	20	4.78 (121.4)	4.98 (126.5)	1.81 (46.0)	.930 (23.62)	.562 (14.27)	.480 (12.19)	.520 (13.21)	.625 (15.88)	↓	1.000-14 UNS-2A	.164-32 UNC-2A
4	0009	36	4.40 (111.8)	4.60 (116.8)	2.31 (58.7)	1.070 (27.18)	.625 (15.88)	.542 (13.77)	.582 (14.78)	.969 (24.61)	↓	1.125-18 UNEF-2A	.250-20 UNC-2A
4	0010	32	3.90 (99.1)	4.10 (104.1)	2.31 (58.7)	1.070 (27.18)	.625 (15.88)	.542 (13.77)	.582 (14.78)	.969 (24.61)	↓	1.125-18 UNEF-2A	.250-20 UNC-2A

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

Config-uration No.	Dash No.	Weight ounces maximum	Dimensions								Terminal thread	Mounting thread	Screw thread
			A Min	A Max	B Max	C Max	D Max	E Min	E Max	F Max			
3	0011	2	1.57 (39.9)	1.69 (42.9)	.765 (19.4)	.260 (6.60)	.32 (8.1)	.260 (6.60)	.300 (7.62)	.32 (8.1)	N/A	.3125-24 UNF-2A	N/A
3	0012	2	1.57 (39.9)	1.69 (42.9)	.765 (19.4)	.260 (6.60)	.32 (8.1)	.260 (6.60)	.300 (7.62)	.32 (8.1)		.3125-24 UNF-2A	
3	0013	5	2.19 (55.6)	2.31 (58.7)	1.145 (29.08)	.380 (9.65)	.25 (6.4)	.420 (10.67)	.460 (11.68)	.25 (6.4)		.4375-20 UNF-2A	
3	0014	5	2.19 (55.6)	2.31 (58.7)	1.145 (29.08)	.380 (9.65)	.25 (6.4)	.420 (10.67)	.460 (11.68)	.25 (6.4)		.4375-20 UNF-2A	
3	0015	3	2.44 (61.0)	2.56 (65.0)	.765 (19.4)	.260 (6.60)	.32 (8.1)	.260 (6.60)	.300 (7.62)	.32 (8.1)		.3125-24 UNF-2A	
3	0016	3	2.44 (61.0)	2.56 (65.0)	.765 (19.4)	.260 (6.60)	.32 (8.1)	.260 (6.60)	.300 (7.62)	.32 (8.1)		.3125-24 UNF-2A	
3	0017	6	2.50 (63.5)	2.62 (66.5)	1.265 (32.13)	.380 (9.65)	.25 (6.4)	.420 (10.67)	.460 (11.68)	.25 (6.4)		.4375-20 UNF-2A	
3	0018	6	2.50 (63.5)	2.62 (66.5)	1.265 (32.13)	.380 (9.65)	.25 (6.4)	.420 (10.67)	.460 (11.68)	.25 (6.4)		.4375-20 UNF-2A	
3	0019	4	2.75 (69.8)	2.87 (72.9)	1.015 (25.78)	.380 (9.65)	.25 (6.4)	.420 (10.67)	.460 (11.68)	.25 (6.4)		.4375-20 UNF-2A	
3	0020	4	2.75 (69.8)	2.87 (72.9)	1.015 (25.78)	.380 (9.65)	.25 (6.4)	.420 (10.67)	.460 (11.68)	.25 (6.4)		.4375-20 UNF-2A	
2	0021	12	2.56 (65.0)	2.68 (68.1)	1.765 (44.83)	.666 (16.92)	.69 (17.5)	.480 (12.19)	.520 (13.21)	.69 (17.5)	.164-32 UNC-2A	.4375-20 UNF-2A	
2	0022	12	2.56 (65.0)	2.68 (68.1)	1.765 (44.83)	.666 (16.92)	.69 (17.5)	.480 (12.19)	.520 (13.21)	.69 (17.5)	.164-32 UNC-2A	.4375-20 UNF-2A	
3	0023	7	3.24 (82.3)	3.64 (92.5)	1.265 (32.13)	.380 (9.65)	.25 (6.4)	.420 (10.67)	.460 (11.68)	.25 (6.4)	N/A	.4375-20 UNF-2A	

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

Configuration No.	Dash No.	Weight ounces maximum	Dimensions								Terminal thread	Mounting thread	Screw thread
			A		B	C	D	E		F			
			Min	Max	Max	Max	Max	Min	Max	Max			
3	0024	7	3.24 (82.3)	3.64 (92.5)	1.265 (32.13)	.380 (9.65)	.25 (6.4)	.420 (10.67)	.460 (11.68)	.25 (6.4)	N/A	.4375-20 UNF-2A	N/A
2	0025	16	4.00 (101.6)	4.12 (104.6)	1.765 (44.83)	.666 (16.92)	.69 (17.5)	.480 (12.19)	.520 (13.21)	.69 (17.5)	.164-32 UNC-2A	.750-20 UNEF-2A	
2	0026	16	4.00 (101.6)	4.12 (104.6)	1.765 (44.83)	.666 (16.92)	.69 (17.5)	.480 (12.19)	.520 (13.21)	.69 (17.5)	.164-32 UNC-2A	.750-20 UNEF-2A	
3	0027	2	2.32 (58.9)	2.44 (62.0)	.765 (19.43)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	N/A	.3125-24 UNF-2A	
3	0028	3	3.50 (88.9)	3.62 (91.9)	1.145 (29.08)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	N/A	.4375-20 UNF-2A	
3	0029	3	2.82 (71.6)	2.94 (74.7)	.765 (19.43)	.260 (6.60)	.320 (8.13)	.260 (6.60)	.300 (7.62)	.320 (8.13)	N/A	.3125-24 UNF-2A	
3	0030	9	4.19 (106.4)	4.31 (109.5)	1.265 (32.13)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	N/A	.4375-20 UNF-2A	
3	0031	5	3.13 (79.5)	3.25 (82.6)	1.015 (25.78)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	N/A	.4375-20 UNF-2A	
2	0032	18	4.44 (112.8)	4.56 (115.8)	1.765 (44.83)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.164-32 UNC-2A	.750-20 UNEF-2A	
3	0033	7	3.57 (90.7)	3.69 (93.7)	1.265 (32.13)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	N/A	.4375-20 UNF-2A	
2	0034	20	5.69 (144.5)	5.81 (147.6)	1.765 (44.83)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.164-32 UNC-2A	.750-20 UNEF-2A	
3	0035	9	4.19 (106.4)	4.31 (109.5)	1.265 (32.13)	.380 (9.65)	.250 (6.35)	.420 (10.67)	.460 (11.68)	.250 (6.35)	N/A	.4375-20 UNF-2A	
2	0036	32	5.44 (138.2)	5.56 (141.2)	2.265 (57.53)	1.075 (27.30)	.690 (17.53)	.540 (13.72)	.580 (14.73)	.690 (17.53)	.164-32 UNC-2A	1.125-18 UNEF-2A	
2	0037	15	4.44 (112.8)	4.56 (115.8)	1.515 (38.48)	.666 (16.92)	.690 (17.53)	.480 (12.19)	.520 (13.21)	.690 (17.53)	.164-32 UNC-2A	.750-20 UNEF-2A	
2	0038	38	5.44 (138.2)	5.56 (141.2)	2.265 (57.53)	1.075 (27.30)	.690 (17.53)	.540 (13.72)	.580 (14.73)	.690 (17.53)	.164-32 UNC-2A	1.125-18 UNEF-2A	
2	0039	38	5.44 (138.2)	5.56 (141.2)	2.265 (57.53)	1.075 (27.30)	.810 (20.57)	.540 (13.72)	.580 (14.73)	.810 (20.57)	.190-32 UNF-2A	1.125-18 UNEF-2A	
2	0040	41	5.69 (144.5)	5.81 (147.6)	2.265 (57.53)	1.075 (27.30)	.880 (22.35)	.540 (13.72)	.580 (14.73)	.880 (22.35)	.250-20 UNC-2A	1.125-18 UNEF-2A	

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Circuit diagram is for information only.
5. Mounting hardware shall be supplied with filter.
6. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter, with the symbol "C" or the symbol "L" as follows:

Circuit	Symbol
L_1	C
L_2, $2L_2$	L

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash No.	Circuit configuration	Maximum rated current (amperes)	Maximum voltage drop volts dc and ac (rms)	Minimum full-load insertion loss (dB) in accordance with MIL-STD-220 at +25°C 2/ 3/ 4/										
				0.15 MHz	0.30 MHz	0.60 MHz	1 MHz	10 MHz	20 MHz	40 MHz	100 MHz	400 MHz	500 MHz	1,000 MHz
0001	2L2 1/	5.0	0.5	60	70	80	80	80	80	80	80	---	80	80
0002	2L2 1/	5.0	"	60	70	80	80	80	80	80	80	---	80	80
0003	P1	0.5	"	← 80 dB from 0.15 MHz to 10 GHz →										
0004	P1	5.0	"	42	62	80	100	88	80	--	80	80	--	80
0005	P1	1.0	"	55	--	73	80	82	--	--	82	82	--	"
0006	P1	3.0	"	55	--	"	"	"	--	--	"	"	--	"
0007	P1	10.0	"	50	--	"	"	"	--	--	"	"	--	"
0008	P1	20.0	"	46	--	"	"	"	--	--	"	"	--	"
0009	P1	50.0	"	46	--	"	"	"	--	--	"	"	--	"
0010	P1	30.0	"	46	--	"	"	"	--	--	"	"	--	"
0011	L_1	0.5	1.0	30	43	53	60	60	60	60	60	60	60	60
0012	L_2	"	"	30	43	53	"	"	"	"	"	"	"	"
0013	L_1	"	"	50	60	60	"	"	"	"	"	"	"	"
0014	L_2	"	"	50	60	60	"	"	"	"	"	"	"	"
0015	L_1	1.0	"	30	43	53	"	"	"	"	"	"	"	"
0016	L_2	"	"	30	43	53	"	"	"	"	"	"	"	"
0017	L_1	"	"	50	60	60	"	"	"	"	"	"	"	"
0018	L_2	"	"	50	60	60	"	"	"	"	"	"	"	"
0019	L_1	3.0	0.5	30	43	53	"	"	"	"	"	"	"	"

footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash No.	Circuit configuration	Maximum rated current (amperes)	Maximum voltage drop volts dc and ac (rms)	Minimum full-load insertion loss (dB) in accordance with MIL-STD-220 at +25°C 2/ 3/ 4/										
				0.15 MHz	0.30 MHz	0.60 MHz	1 MHz	10 MHz	20 MHz	40 MHz	100 MHz	400 MHz	500 MHz	1,000 MHz
0020	L_2	3.0	0.5	30	43	53	60	60	60	60	60	60	60	60
0021	L_1	3.0	"	40	53	60	"	"	"	"	"	"	"	"
0022	L_2	3.0	"	40	53	60	"	"	"	"	"	"	"	"
0023	L_1	5.0	"	30	43	53	"	"	"	"	"	"	"	"
0024	L_2	"	"	30	43	53	"	"	"	"	"	"	"	"
0025	L_1	"	"	40	53	60	"	"	"	"	"	"	"	"
0026	L_2	"	"	40	53	60	"	"	"	"	"	"	"	"
0027	T	0.5	2.5	25	35	45	50	70	70	70	70	70	70	70
0028	"	0.5	"	37	47	53	57	"	"	"	"	"	"	"
0029	"	1.0	"	25	35	45	50	"	"	"	"	"	"	"
0030	"	1.0	"	37	47	53	57	"	"	"	"	"	"	"
0031	"	3.0	1.5	25	35	45	50	"	"	"	"	"	"	"
0032	"	3.0	1.5	37	47	53	57	"	"	"	"	"	"	"
0033	"	5.0	1.0	25	35	45	50	"	"	"	"	"	"	"
0034	"	5.0	1.0	37	47	53	57	"	"	"	"	"	"	"
0035	"	10.0	0.5	25	35	45	50	"	"	"	"	"	"	"
0036	"	10.0	"	37	47	53	57	"	"	"	"	"	"	"
0037	"	20.0	"	25	35	45	50	"	"	"	"	"	"	"
0038	"	20.0	"	37	47	53	57	"	"	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash No.	Circuit configuration	Maximum rated current (amperes)	Maximum voltage drop volts dc and ac (rms)	Minimum full-load insertion loss (dB) in accordance with MIL-STD-220 at +25°C 2/ 3/ 4/										
				0.15 MHz	0.30 MHz	0.60 MHz	1 MHz	10 MHz	20 MHz	40 MHz	100 MHz	400 MHz	500 MHz	1,000 MHz
0039	T	30.0	0.5	25	35	45	50	70	70	70	70	70	70	70
0040	T	50.0	0.5	25	35	45	50	70	70	70	70	70	70	70

1/ Maximum operating temperature of +85°C.

2/ Dash number 0004 shall also meet the following no-load insertion requirements.

0.15 MHz	0.5 MHz	1 MHz	10 MHz
53 dB	86 dB	100 dB	90 dB

3/ For dash number 0005 through 0010, all insertion loss measurements shall be performed at no-load.

4/ Unless otherwise specified (see 2/ and 3/), full load insertion-loss measurements shall be performed from 0.15 MHz to 20 MHz. Insertion-loss measurements above 20 MHz shall be performed at no-load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

Case: Metal.

Rated voltage: 600 volts dc, 250 volts ac.

Rated current: See table I.

Insertion loss:

At +25°C: Shall be as specified in table I.
At -55°C and +125°C: Shall be as specified in table I except a degradation of 2 dB from the value specified in table I shall be allowed up to 10 MHz.

Operating temperature range:

Dash numbers 0001 and 0002: -65°C to +85°C.
Dash numbers 0003 through 0040: -55°C to +125°C.

Seal: Method 112, test condition B, MIL-STD-202.

Temperature rise: 25°C.

Maximum voltage drop: See table I.

Insulation resistance: Insulation resistance shall be not less than 1,000 meghoms minimum.

Terminal strength: Method 211 of MIL-STD-202.

Pull test: Test condition A ---- 9 pounds.
Bend test: Test condition B ---- 5 bends.
Torque test: Test condition E (threaded stud terminals only).

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202 (solder lug terminals only).

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Thermal shock and immersion:

Thermal shock:

Method 107, test condition B, MIL-STD-202, except the temperature at step 3 shall be +85°C (dash numbers 0001 and 0002).

Method 107, test condition A, MIL-STD-202, except the temperature at step 3 shall be 125°C (dash numbers 0003 through 0040).

Immersion: In accordance with MIL-F-15733.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Moisture resistance:

Thermal shock:

Method 107, test condition B, MIL-STD-202, except the temperature at step 3 shall be +85°C (dash numbers 0001 and 0002).

Method 107, test condition A, MIL-STD-202, except the temperature at step 3 shall be +125°C (dash numbers 0003 through 0040).

Moisture resistance: Method 106 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

Life: Method 108, test condition B, MIL-STD-202.

Test voltage: 1.4 times rated dc voltage.

Part number: M15733/31-(dash number from table I).

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0267-1)

☆U.S. GOVERNMENT PRINTING OFFICE 1983 — 606-034/3806

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-F-15733/31E	Filters, Radio Frequency Interference, Hermetically Sealed, Style FL83

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 1426 82 MAR

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:18Z
Check the source to verify that this is the current version before use.