
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-3044/U

This specification sheet is approved for use by the Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of specification MIL-B-49030(EL).

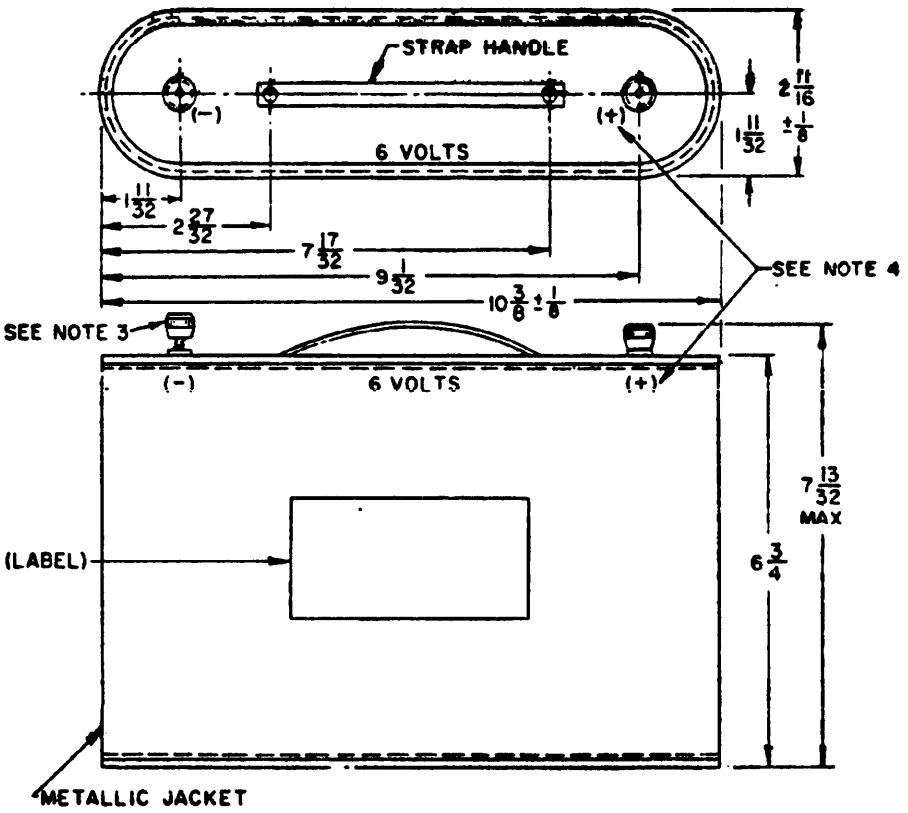

INCHES	MM
1/16	1.59
1/8	3.18
1 11/32	34.13
2 11/16	68.26
2 27/32	72.23
6 3/4	171.45
7 13/32	188.12
7 17/32	191.29
9 1/32	229.39
10 3/8	263.53

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ± 1/16 inch.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

NOTES: (Contd)

3. Provide insulated knurled nuts with brass inserts.

4. Voltage and polarity markings may be placed either on the top or front face of the battery.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 6 volts.

Usual number and type of cells: 32 ea BA-3030/U.

Usual cell connection: Series - parallel

Terminals: Stud and nut.

Weight (maximum): 11 pounds.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be as specified herein.

First Article inspection:

Vibration test.
Mechanical-shock test.
Insulation-resistance test.
Visual and mechanical (external and internal).
Dimensions and weight.
Battery voltage.
Waterproofing-of-jacket test.
Capacity: I, LT, and HT.

Quality conformance inspection:

Visual and mechanical (external).
Dimensions and weight.
Battery voltage.
Insulation-resistance test.
Waterproofing-of-jacket test.
Vibration test.
Mechanical-shock test.
Capacity: LT, HT, T and D.

Methods of examinations and test:

Capacity tests: See requirements for capacity specified herein.

Test	Storage period	Temperature	Minimum Svce. Req'd (Hrs)
I (Initial 70°F)	48 Hrs Min.	70°F	40
LT (0°F)	16 Hrs Min.	0°F	8
HT (160°F)	7 days plus	160°F	
	48 Hrs Min.	70°F	36
T	13 Wks plus	113°F	
	48 Hrs Min.	70°F	34
D	52 Wks	70°F	35

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Discharge - The battery shall be discharged through 3-1/3 ohms continuously to an end voltage of 3.6 volts

Closed circuit voltage: Use TS-183( )/U per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use a load resistance value of 7.995 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
5	5.32

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - EL

Preparing Activity:
Army - EL

(Project 6135-A142-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-B-49030/4(EL) BATTERY, DRY, BA-3044/U

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 64 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-PM 1068-68

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:44Z
Check the source to verify that this is the current version before use.