MILITARY SPECIFICATION SHEET

CIRCUIT CARD ASSEMBLY, 9290661
(BITE "A")

This specification is approved for use by the US Army Armament Research and Devlopment Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the circuit card assembly described herein shall consist of this document and the latest issue of specification MIL-C-63371(AR).

Electrical Requirements

1. All frequencies and pulse widths shall be within plus or minus 5.0%, unless otherwise specified.

2. All input and output levels shall be consistent with IC operating levels and power supply regulation and shall be within plus or minus 1.0% of the indicated nominal values, unless otherwise specified.

FSC: 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:44Z
Check the source to verify that this is the current version before use.

BOARD POWER

NOTE: Maintain the following throughout all tests.

Pin No.	Voltage
2	14
37	14
35	0
70	0

SIMULATOR LAUNCHER POSITION POTENTIOMETER

Test 1A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
39	Figure 1	41	Figure 1
40	Figure 1	42	Figure 1
65	0		

Test 1B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
39	Figure 1	41	1.6
40	Figure 1	42	1.6
65	14		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:44Z
Check the source to verify that this is the current version before use.

LAUNCHER ANGLE

NOTE: Connect a 500 ohm, 1/4 watt resistor between pins 43 and 47.

Test 2A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
38	Figure 2	43	Figure 2
		47	Figure 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:44Z
Check the source to verify that this is the current version before use.

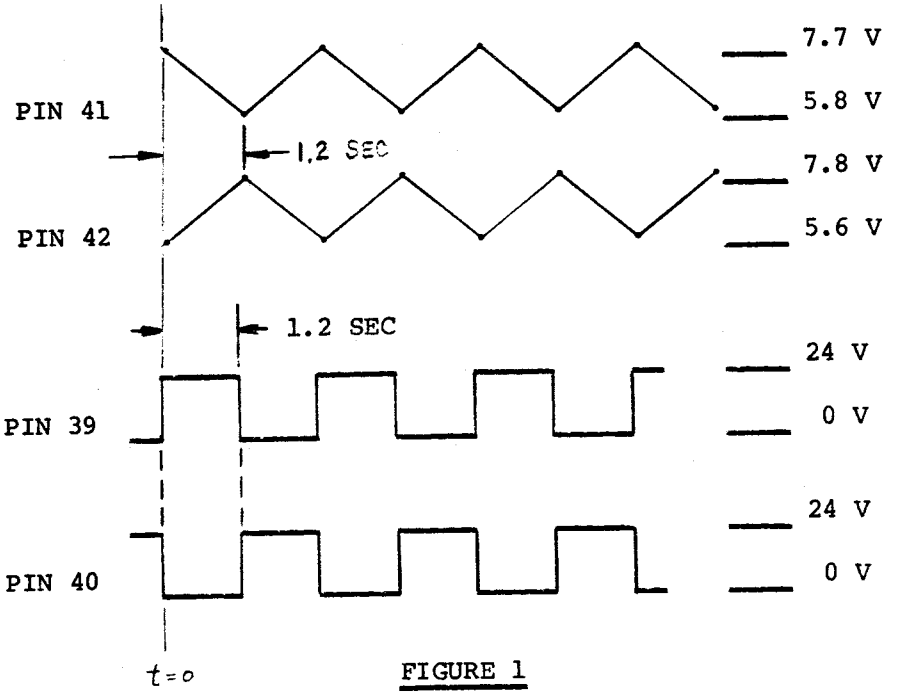


FIGURE 1

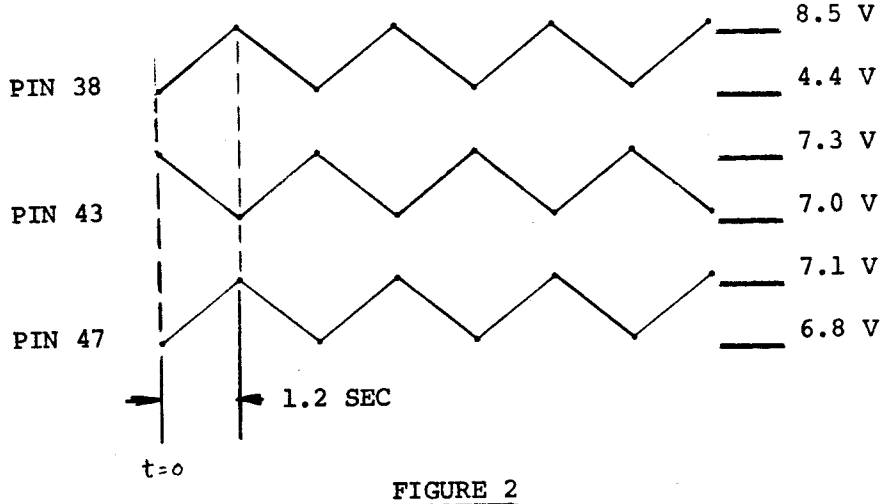


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:44Z
Check the source to verify that this is the current version before use.

LAUNCHER SPEED

Test 3A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	HERTZ
65	0	67	69 ± 10%
64	24 V pulse for 1 sec	63	400 ± 5%
60	14		
66	14		

Test 3B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	HERTZ
65	0	67	23.3 ± 10%
64	24 V pulse for 1 sec	63	400 ± 5%
60	14		
66	9		

Test 3C

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	HERTZ
65	0	63	OFF
64	24 V pulse for 1 sec	67	OFF
60	0		
66	9		

Test 3D

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	HERTZ
60	14	67	OFF
64	0		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:44Z
Check the source to verify that this is the current version before use.

SERVO LEFT

NOTE: Connect a 100 ohm, 1/4 watt resistor between pins 45 and 48.

Test 4A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	HERTZ
44	5.0 ± 2%	50	1000 ± 10%
46	7.5 ± 2%	51	1000 ± 10%

Test 4B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	HERTZ
44	7.5 ± 2%	50	1000 ± 10%
46	5.0 ± 2%	51	1000 ± 10%

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:44Z
Check the source to verify that this is the current version before use.

SERVO RIGHT

NOTE: Connect a 100 ohm, 1/4 watt resistor between pins 53 and 55.

Test 5A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Hertz
52	7.5 ± 2%	57	1000 ± 10%
54	5.0 ± 2%	58	1000 ± 10%

Test 5B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Hertz
52	5.0 ± 2%	57	1000 ± 10%
54	7.5 ± 2%	58	1000 ± 10%

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project No: 1095-A-124/9

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/2170

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-63371/9A Circuit Card Assembly, 9290661 (BITE"A")

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSF OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:44Z
Check the source to verify that this is the current version before use.