NOT MEASUREMENT SENSITIVE

MIL-PRF-62462C(AT)
14 June 1996
SUPERSEDING
MIL-E-62462B(AT)
26 August 1985

PERFORMANCE SPECIFICATION

ENGINE, DIESEL, LIQUID-COOLED, 8 CYLINDER; 4 CYCLE, V-TYPE, 220 KW (295 HP)

This specification is approved for use by the U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a liquid cooled, 4 cycle, 90° V-type, 8 cylinder internal combustion, compression ignition engine. At 2600 revolutions per minute (rpm), the diesel engine is rated at 220 kilowatts (kW) (295 horsepower (hp)). The diesel engine, and the associated accessories furnished by the engine supplier are referred to herein as "engine".

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 2815
DISTRIBUTION STATEMENT A. Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-870	- Antifreeze/Coolant, Engine: Ethylene Glycol, Inhibited Concentrated.
A-A-50271	- Plates, Identification (Instruction and Marking, Blank).
A-A-52557	- Fuel Oil, Diesel.
P-C-437	- Cleaning Compound, High Pressure (Steam) Cleaner.

DEPARTMENT OF DEFENSE

MIL-L-2104	- Lubricating Oil, Internal Combustion Engine, Combat/Tactical Service.
MIL-A-11755	- Antifreeze, Arctic Type.
MIL-L-46167	- Lubricating Oil, Internal Combustion Engine, Arctic.
MIL-A-53009	- Additive, Antifreeze Extender, Liquid Cooling System.
MIL-T-83133	- Turbine Fuel, Aviation Kerosene Type, Grade JP-8.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-461	- Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.
MIL-STD-810	- Environmental Test Methods and Engineering Guidelines.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Bldg. 4D, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

ARMY

12325838	- Engine, Diesel, Cummins V903
12325839	- Engine Assembly.

(Copies of these drawings are available from the U.S. Army Tank-automotive and Armaments Command, AMSTA-TR-E/BLUE, Warren, MI 48397-5000.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASQC Z1.4	- Sampling Procedures and Tables for Inspection by Attributes (DoD Adopted).
ANSI/SAE AS478	- Identification Marking Methods (DoD Adopted).

(Application for copies should be addressed to American National Standard Institute, 11 West 42nd Street, New York, NY 10036.)

NATO INTERNATIONAL STAFF - DEFENSE SUPPORT DIVISION

AEP 5	- NATO Standard Diesel and Spark Ignition Engines Laboratory Test.

(Application for copies of NATO publications should be addressed to NATO, Military Agency for Standardization (MAS), 35 Chesham Place, London SWI, England.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE J1349	- Engine Power Test Code - Spark Ignition and Compression Ignition; Net Power Rating, Standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

(Application for copies of SAE publications should be addressed to Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.2 Design and construction.

3.2.1 Materials. Materials shall be as specified herein and in referenced specifications, standards, and drawings. Engine construction and assembly shall be in accordance with Drawing 12325838 (see 4.6).

3.2.1.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs (see 4.6).

3.2.2 Weight. The dry weight of the engine as shown on Drawing 12325839 shall be not more than 1066 kilograms (kg) (2350 pounds (lb)) (see 4.6).

3.2.3 Lifting eyes. The engine shall be equipped with lifting eyes as shown on Drawing 12325839 (see 4.6).

3.2.4 Diagnostic test point. The engine shall be provided with accessible test points for temperature and pressure measurements in the air, fuel, cooling and lubrication systems and rpm measurement as shown on Drawing 12325839 (see 4.6).

3.2.5 Starter. The engine starter shall conform to system requirements and shall operate at nominal voltage of 24 volts direct current (Vdc) (see 4.6).

3.2.6 Drain plugs. Engine oil pan shall be equipped with a magnetic drain plug (see 4.6).

3.2.7 Oil level. Permanent markings shall be provided on the dipstick to indicate quantity of oil to be added when oil level has dropped to add mark (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

3.2.8 Interchangeability. To provide for interchangeability, the engine, including accessories, shall conform to this specification and to Drawing 12325839. Any changes affecting physical, functional or electrical interfaces shall require prior approval by the acquisitioning activity. All subassemblies having the same part number shall be functionally and dimensionally interchangeable (see 4.6).


3.2.9 Engine emissions. The engine shall be designed to comply with all applicable engine emission regulations in effect on the date of manufacture (see 4.6).

3.3 Performance.

3.3.1 Engine performance. The following engine performance characteristics shall conform to figure 1 for those curves labeled “maximum”. Performance shall be obtained using fuel conforming to A-A-52557 (see 4.6).

a. Speed range
b. Brake kW (brake horsepower (bhp))
c. Torque, Newton-meter (N-m) (pound-feet (lb-ft))
d. Fuel consumption, kilograms per kilowatt-hour (kg/kWh) (pounds per brake horsepower hour (lb/bhph)).
e. Governed speed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

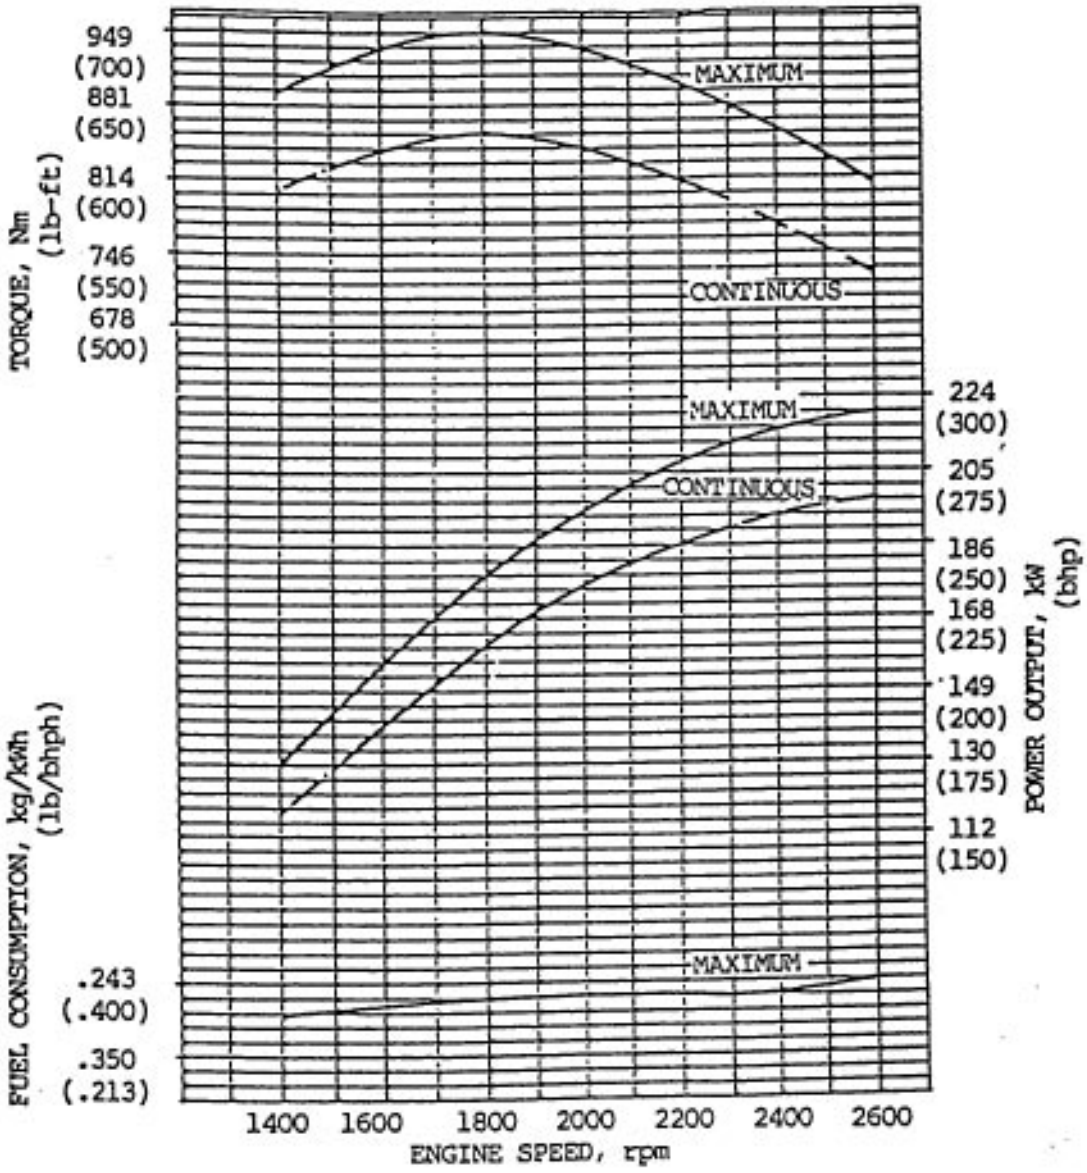

NOTES:

1. All data is based on the engine operating with fuel system, water pump, lubricating oil pump, air cleaner, and muffler; not included are alternator, compressor, fan, optional equipment and driven components.
2. Curves shown above represent engine performance capabilities at SAE J1349 conditions of 150 meter (m) (500 feet (ft)) altitude [98.21 kilopascals (kPa) (29.00 inches mercury (in Hg)) dry barometer], 29 degrees Celsius (°C) (85 degrees Fahrenheit (°F) air intake temperature, and 1.29 kPa (0.38 in Hg) water vapor pressure with No. 2 diesel fuel.
3. Maximum performance curves are nominal within a ± 5% tolerance band.

Figure 1. Performance data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

3.3.1.1 Idle speed. The engine shall maintain an idle speed of 800 ± 25 rpm (see 4.6).

3.3.1.2 Maximum governed speed. The maximum no load governed speed shall be 2965 rpm. The maximum full load governed speed shall be 2600 rpm (see 4.6).

3.3.1.3 Exhaust smoke density. With the engine operating at full load at speeds of 1800 and 2600 rpm, the exhaust smoke density shall not exceed the limits specified in table I. As an option, percent of opacity method may be used with limits as specified in table I (see 4.6).

TABLE I. Exhaust smoke density.

Engine speed (rpm)	Bosch rating	Opacity limit (max)
1800 ± 100	3.7	12%
2600 ± 100	3.2	9%

3.3.1.4 Heat rejection. Total engine heat rejection to coolant shall be not more than 8862 kilojoules per minute (kJ/min) (8400 British thermal units per minute (Btu/min)) under the following conditions (see 4.6):

a. Engine speed, 2600 rpm.
b. Engine air flow, 0.288 cubic meters per second (m^3/s) (610 cubic feet per minute (ft^3/min)) at the inlet.
c. Coolant flow, 568 liters per minute (L/min) (150 gallons per minute (gal/min)).
d. Torque, 808 N-m (596 lb-ft).
e. Coolant temperature, 85°C (185°F).

3.3.1.5 Engine starting. In an ambient temperature range of +49 to -32°C (120 to -25°F), the engine shall be capable of being started in one minute or less. Ether starting fluid may be used at ambient temperatures below 0°C (32°F) (see 4.6).

3.3.1.6 Coolant. The engine shall perform as specified herein using one of the following coolants as required for the operational or storage condition present (see 4.6).

a. Water and antifreeze compound conforming to A-A-870.
b. Arctic-type antifreeze compound conforming to MIL-A-11755.
c. Water and additives conforming to MIL-A-53009.

3.3.1.7 Normal operating temperatures. The engine shall be capable of operating at the following temperatures without abnormal engine degradation (see 4.6).

a. Oil sump: Minimum 60°C (140°F) and maximum 135°C (275°F) (measured at drain plug).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

b. Coolant: Maximum continuous, 99°C (210°F) (measured at engine outlet).
Maximum intermittent, 110°C (230°F) not to exceed 15 minutes (measured at the inlet to the transmission oil cooler).

3.3.1.8 Air inlet and exhaust restrictions. The engine shall perform as specified herein at full rated power and speed with the following maximum flow restrictions (see 4.6):

a. Air inlet restriction: 6.2 kPa (25 inches of water (in H_2O)).
b. Exhaust restriction: 10.1 kPa (3.0 in Hg).

3.3.1.9 Oil. The engine shall perform as specified herein using oil conforming to MIL-L-2104 for an ambient temperature range of -23 to +49°C (-10 to 120°F) and oil conforming to MIL-L-46167 for arctic operation -18 to -54°C (0 to -65°F) (see 4.6).

3.3.1.10 Fuel inlet restriction. The engine shall perform as specified herein at full rated power and rated load with a maximum fuel inlet restriction of (see 4.6):

13.6 kPa (4.0 in Hg) (clean filter element).
27.1 kPa (8.0 in Hg) (dirty filter element).

3.3.1.10.1 Fuel. The engine shall perform as specified herein using fuel in accordance with A-A-52557. The engine shall be capable of operating over the entire temperature range specified herein using JP-8 grade fuel in accordance with MIL-T-83133. Fuel conforming to A-A-52557 or JP-8 shall be required for low temperature ambient conditions as specified (see 4.6).

3.3.1.11 Slope operation. The engine must start and be capable of operating with the performance characteristics specified in 3.3.1 at a 70 percent front to rear or rear to front slope and at a 45 percent side slope (either direction). The engine shall be capable of operating on those slopes when the oil level on the dipstick is at the “add” mark (determined on level ground). There shall be no evidence of faulty lubrication, coolant or fuel leakage or other malfunction (see 4.6).

3.3.1.12 Endurance. The engine shall meet the requirements of NATO AEP-5 (see 4.6).

3.3.2 Steam and waterjet cleaning. The engine shall be capable of withstanding steam cleaning with a compound conforming to P-C-437 and waterjet washing without deterioration or leakage of seals, gaskets or electrical components. Paint removal shall not be considered a deficiency (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

3.3.3 Leakage. When the engine is being operated, there shall be no evidence of "leaks" or "drips" in the oil, fuel, or coolant circuits (see 4.5.1 and 6.3). A "weep" or "seep" is permissible, but shall be recorded.

3.3.4 Environmental conditions. The engine shall meet all performance requirements before, during, and immediately after the environmental conditions specified herein (see 4.5.2).

3.3.5 Electromagnetic radiation. Electromagnetic emissions from the engine shall be in accordance with the requirements of MIL-STD-461 (see 4.6).

3.4 Protective coating. Unless otherwise specified (see 6.2), all exposed exterior surfaces of the engine shall be finished in accordance with the manufacturer's standard practice (see 4.6).

3.5 Identification and marking. The engine shall be identified in accordance with ANSI/SAE AS478 (see 4.6).

3.5.1 Nameplate. Unless otherwise specified on the applicable drawing, the nameplate, and data and instruction plates shall conform to A-A-50271 (see 4.6).

3.5.2 Accessories and equipment. All accessories and equipment shall be identified in accordance with auxiliary manufacturer's standard practice and the I.D. markings shall include the manufacturer's part number, serial number if available, and date of manufacture (see 4.6).

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Conformance inspections (see 4.4).
    1. Examination (see 4.4.1.3).
    2. Acceptance tests (see 4.4.2).

4.2 Test conditions. Unless otherwise specified (see 6.2), all tests shall be conducted at 21 ± 6°C (70 ± 10°F).

4.3 First article inspection. First article inspections are categorized as preproduction inspection and initial production inspection.

4.3.1 Preproduction inspection. When specified (see 6.2), the preproduction sample shall consist of two diesel engines. Preproduction inspection shall consist of examination as specified in table II and testing as specified in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

4.3.2 Initial production inspection. Unless otherwise specified (see 6.2), the Government shall select two units for initial production inspection from the first ten engines produced under the production contract. Initial production units shall be examined as specified in table II and tested as specified in table III.

TABLE II. Classification of defects.

Category	Defect	Method of examination
Major:		
101	Incomplete assembly.	Visual
102	Valve tappet clearance (each valve): intake and exhaust valves improperly adjusted.	Visual/functional
103	Fuel, oil and coolant leaks: leakage (see 6.3)	Visual
104	Governor: malfunction; not sealed.	Visual/functional
105	Improper torque on accessible cylinder head bolts, intake and exhaust manifold flange bolts that can be reached without breaking seals or removing cover.	SIE 1/
106	Crankshaft: excessive or restrictive end play.	Visual/functional
107	Fuel system components: malfunction; damage: leaks (see 6.3).	Visual/functional
108	Fuel injection system timing and components: malfunction: improper adjustment	Visual/functional
109	Engine emissions exceed regulatory limits (see 3.2.9).	SIE
110	Engine performance capabilities not as specified (see 3.3.1).	SIE
111	Idle speed not as specified (see 3.3.1.1).	SIE
112	Maximum governed speed not as specified (see 3.3.1.2).	SIE
113	Exhaust smoke density not as specified (see 3.3.1.3).	SIE
114	Engine heat rejection not as specified (see 3.3.1.4).	SIE
115	Engine starting not as specified (see 3.3.1.5).	Functional
116	Operating limits and coolant not as specified (see 3.3.1.6).	SIE
117	Normal operating temperatures not as specified (see 3.3.1.7)	SIE
118	Air inlet/exhaust restrictions not as specified (see 3.3.1.8).	SIE
119	Oil not as specified (see 3.3.1.9).	Functional
120	Fuel inlet restriction not as specified (see 3.3.1.10).	SIE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects - Continued.

Category	Defect	Method of examination
121	Slope operation not as specified (see 3.3.1.11).	Visual/functional
122	Endurance not as specified (see 3.3.1.12).	Functional
123	Steam and waterjet cleaning not as specified (see 3.3.2)	Visual
124	Electromagnetic radiation not as specified (see 3.3.5)	SIE
Minor:		
201	Fuel lines: damaged, rubbing, improper support.	Visual
202	Oil dipstick gage: missing.	Visual
203	Oil level: overfilled, below safe operating level.	Visual
204	Bolt on components loose; nuts or bolts missing, heads rounded or deformed.	Visual/tactile
205	Threaded holes: incorrect size, improper depth.	SIE
206	Identification, instruction, data, and name plates: missing or incorrect.	Visual
207	Painting: sags, runs, inadequate or improper coverage, paint in threaded holes.	Visual

1/ SIE = Standard Inspection Equipment.

TABLE III. Classification of tests.

Title	Requirement	Test	First article	Acceptance (100%)
Leakage	3.3.3	4.5.1	X	X
Environmental	3.3.4	4.5.2	X	

4.3.3 First article inspection failure. Failure of any first article sample to pass specified examinations or tests shall be cause for rejection.

4.4 Conformance inspection. Conformance inspections are classified as acceptance tests.

4.4.1 Sampling.

4.4.1.1 Lot formation. An inspection lot shall consist of all the diesel engines from an identifiable production period, from one manufacturer, submitted at one time for acceptance.

4.4.1.2 Sampling. Samples for conformance inspection shall be selected in accordance with general inspection level II of ANSI/ASQC Z1.4.

4.4.1.3 Examination. For examination purposes, defects shall be classified as listed in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

4.4.2 Acceptance tests (100 percent inspection). Each engine assembly shall be subjected to examination for major defects 110 through 113, 117 through 120, and 123 listed in table II and the tests specified in table III.

4.4.3 Failure. Failure of any engine assembly to pass any of the specified tests shall be cause for the Government to refuse acceptance of the production quantity represented, until action taken by the contractor to correct defects and prevent recurrence has been approved by the Government.

4.5 Test methods.

4.5.1 Leakage. Conformance to 3.3.3 shall be verified by examination for evidence of "leaks" or "drips" (see 6.3) during and after testing as specified herein.

4.5.2 Environmental conditions. The engine shall be tested in accordance with the high temperature operation and low temperature storage procedures of MIL-STD-810 for conformance to 3.3.4. The following shall be incorporated into the procedures.

a. High temperature.
   - Raise the internal chamber temperature to 49°C (120°F).
   - Maintain internal chamber temperature for 6 hours at 49°C (120°F).
   - Raise the internal chamber temperature to 71°C (160°F) within a time period of 1 hour and then maintain at that temperature for 4 additional hours.
   - Lower the internal chamber temperature to 49°C (120°F) within a time period of 1 hour.
   - Repeat steps 3, 4, and 5 two additional times (making a total of three 12 hour cycles).
   - Adjust the internal chamber temperature to the highest operating temperature under which the test item is designed to operate and maintain until temperature stabilization of the test item is reached.

b. Low temperature (operation procedure, if required).
   - Prepare for test.
   - Lower the internal chamber temperature to the storage temperature of -33°C (-28°F) and maintain for a period of 24 hours after stabilization or for the period specified in the equipment specification.
   - Inspect.
   - Adjust the internal chamber temperature to -32°C (-25°F) and maintain until temperature stabilization of the test item is reached.

4.6 Design and construction. Conformance to 3.2 through 3.3.2, and 3.3.5 through 3.5.2 shall be determined by examination for the defects listed in table II and inspection of contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

records providing proof or certification that the requirements have been met. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use. The diesel engine covered by the specification is intended for use as original equipment, as spares or as replacements in the Armored Combat Earthmover M9 ACE.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).
c. Applicable drawing number, title, and date (see 2.2.2).
d. If first article is required (see 3.1).
e. Exterior surface finish , if other than specified (see 3.4).
f. If test conditions should be other than as specified (see 4.2).
g. If preproduction inspection is required (see 4.3.1).
h. If sample size for initial production inspection should be other than as specified (see 4.3.2).
i.. Packaging requirements (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

6.3 Definitions.

6.3.1 Leakage. The following definitions are established as guidelines governing leakage:

a. Weep - Any evidence of fluid beyond a seal or joint.
b. Seep - Any evidence of fluid beyond a seal or joint that does not result in the formation of a droplet.
c. Leak - Any evidence of fluid beyond a seal or joint that results in the formation of a droplet.
d. Drip - Any evidence of fluid beyond a seal or joint where droplets form and fall.

6.4 Control test. Depending on contract order size, control testing may be desired. If so desired, it should be specified in the contract. A suggested test would verify the engine is capable of operating at the specified speeds and loads in table IV while meeting the performance characteristics of figure 1, oil sump temperature requirements of 3.3.1.7a, and coolant temperature requirements of 3.3.1.7b.

TABLE IV. 50-hour performance test conditions.

Duration, hours	Engine speed, rpm	Load, percent
5	1500	50
5	1850	85
5	2600	0
5	2250	85
30	2600	100

6.5 Subject term (keyword) listing.

Armored Combat Earthmover
Compression-ignition
Internal combustion
M9 ACE
Smoke, exhaust, density

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AT

Preparing Activity:
Army - AT

(Project 2815-0173)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-PRF-62462C(AT)	960614

3. DOCUMENT TITLE: Engine, Diesel, Liquid-Cooled, 8 Cylinder; 4 Cycle, V-Type, 220 KW (295 HP)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial: (810) 574-8745 (2) AUTOVON: 786-8745
c. ADDRESS (Include Zip Code) Commander U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026/10-23T01:41Z
Check the source to verify that this is the current version before use.