MILITARY SPECIFICATION

VIEWING STAND, ILLUMINATED,

NEGATIVE FILM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an illuminated viewing stand with a 24- by 30-inch viewing area.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

J-C-580	- Cord, Flexible, and Wire, Fixture, (Electrical, 0- to 600-Volt Service).
L-S-300	- Sheeting and Tape, Reflective: Nonexposed Lens, Adhesive Backing.
W-C-596	- Connector, Plug, Electrical; Connector, Receptacle, Electrical.
W-J-800	- Junction Box; Extension, Junction Box; Cover, Junction Box (Steel, Cadmium, or Zinc-Coated).
W-L-101	- Lamp, Incandescent, (Electric, Large, Tungsten-Filament) (General Specification).
W-L-116	- Lamps, Fluorescent (General Specification).
QQ-A-250/1	- Aluminum 1100, Plate and Sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

QQ-A-250/8	- Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded, 6061.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

Military

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-L-19037	- Lampholders for Incandescent and Fluorescent Lamps, and Guard, Incandescent Lamp Type.
MIL-P-24191	- Plastic Sheet, Cast, Acrylic, Shipboard Application (Illumination and Signal Lighting).

STANDARDS

Federal

FED. STD. No. 595	- Colors.

Military

MIL-STD-105	- Inspection Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street, NW, Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Description. The viewing stand shall be as shown on Figures 1 and 2, and as specified herein.

3.2 Material. Material shall be as specified herein and as shown on the applicable figures. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.2.1 Aluminum.

3.2.1.1 Sheet. Aluminum sheet shall conform to QQ-A-250/1, Temper O.

3.2.1.2 Angles. Aluminum angles shall conform to QQ-A-250/8, Temper T6.

3.3 Plastic window. The window shall be of plastic conforming to MIL-P-24191, Type WTLS-4, Grade D.

3.4 Incandescent lamps. Incandescent lamps shall conform to W-L-101, Bulb S-14. The bulb shall be dyed red to produce a red light.

3.4.1 Lampholder. The lampholder shall be of the switchless type and shall have a porcelain base to fit the junction box specified in 3.5. The lampholder shall have a screw-base socket to fit the lamp specified in 3.4.

3.5 Junction box. The junction box shall conform to W-J-800, Type I.

3.6 Fluorescent lamps. Fluorescent lamps shall conform to W-L-116, 20-watt, T-12 bulb, daylight, 24-inch. Lampholders shall conform to MIL-L-19037, Type VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

3.7 Switch. The switch shall be of the Double-Pole-Double-Throw (DPDT) type with center "OFF" position. The switch shall be rated at 120-volt, 20-ampere. The switch shall be wired as shown on the wiring diagram on the figures so that one position will turn on the incandescent lamps and the other position will turn on the fluorescent lamps. The center position shall be the "OFF" position. The switch shall be clearly marked to show which position is for the incandescent lamps and which position is for the fluorescent lamps.

3.8 Wiring. Interior wiring shall be routed along the inside walls of the viewing stand. Wiring shall be supported to prevent sagging, and grommets shall be provided at all points where wiring passes through holes.

3.8.1 Cord. A cord not less than 10 feet long shall be connected to the stand to provide power for the lamps. The cord shall conform to J-C-580, type and size optional, 2-wire with ground. The cord shall terminate with a plug conforming to W-C-596, Style D21.

3.9 Fluorescent strip. The fluorescent strip shall conform to L-S-300, Type II, Class 1, Reflectivity No. 1, Color g. The strips shall be fastened to the light stand as shown on the figures.

3.10 Identification marking. The light stand shall be identified in accordance with MIL-STD-130.

3.11 Treatment and painting. Treatment and painting shall be in accordance with MIL-T-704, Type A, except that the interior shall be gloss white and the exterior shall match Color 34087 of FED. STD. No. 595.

3.11.1 Hardware. All screws, nuts, bolts, washers, and lock washers shall be zinc- or cadmium-plated.

3.12 Workmanship.

3.12.1 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of materials shall be done by methods that will not cause injury to the material. Corners shall be square and true. All bends shall be made with controlled means to insure uniformity of size and shape. Surfaces shall be free from burrs, sharp edges, and sharp corners.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

3.12.2 Bolted connections. Bolt holes shall be accurately formed and shall have the burrs removed. Washers and lock washers shall be provided where necessary. All fasteners shall be correctly torqued. All bolts shall have full thread engagement, and bolts shall not extend more than two full threads.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. Inspections shall be classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of preparation for delivery (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105, Inspection Level III.

4.4 Inspection procedure.

4.4.1 Examination. Samples selected in accordance with 4.3.1 shall be examined for the following defects. AQL shall be 0.4 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

Major

101. Viewing stand not in accordance with the figures.
102. Materials not as specified.
103. Wiring not as specified.
104. Switch not as specified; does not function as specified.
105. Incandescent lamps not dyed red, not of the type specified.
106. Fluorescent lamps not as specified.
107. Treatment and painting not as specified.
108. Identification marking missing, incomplete, or illegible.
109. Workmanship not as specified.

4.5 Inspection of preparation for delivery.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

110. Materials, methods, or containers not as specified. Each incorrect material, method, or container shall constitute one defect.
111. Boxes not closed in accordance with Method V as specified.
112. Strapping not zinc-coated for Level A.
113. Marking illegible, incorrect, incomplete, or missing.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C, as specified (see 6.2).

5.1.1 Level A. Each viewing stand shall be preserved in accordance with MIL-P-116, Method III, in a close-fitting box conforming to

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

PPP-B-636, W6c, style optional. Closure of the box shall be in accordance with the appendix to the box specification, Method V.

5.1.2 Level C. Viewing stands shall be preserved and packaged to afford adequate protection against corrosion, deterioration, and damage during handling and shipment from the supply source to the initial destination. The supplier's standard practice may be used when it fulfills these requirements.

5.2 Packing. Packing shall be Level A, B, or C as specified (see 6.2).

5.2.1 Level A. Viewing stands preserved and packaged as specified in 5.1 shall be packed in close-fitting boxes conforming to PPP-B-601, Overseas Type, style optional, Grade B. Strapping shall be zinc-coated.

5.2.2 Level B. Viewing stands shall be packed as specified for Level A, except that boxes shall be Domestic Type and strapping will not be required to be zinc-coated.

5.2.3 Level C. Viewing stands shall be packed to assure carrier acceptance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The viewing stand is intended for viewing and inspecting negatives and other photographic material used in the lithographic process. NSN 6760-00-616-9683 which is used in Equipment Set 3610-97-CL-E13 applies thereto. This specification is intended to replace CE PD 314, dated 24 April 1959.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Level of preservation and packaging, and level of packing required (see 5.1 and 5.2).

Custodian:


Army - ME

Preparing activity:

Army - ME

Project No. 6760-A554

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

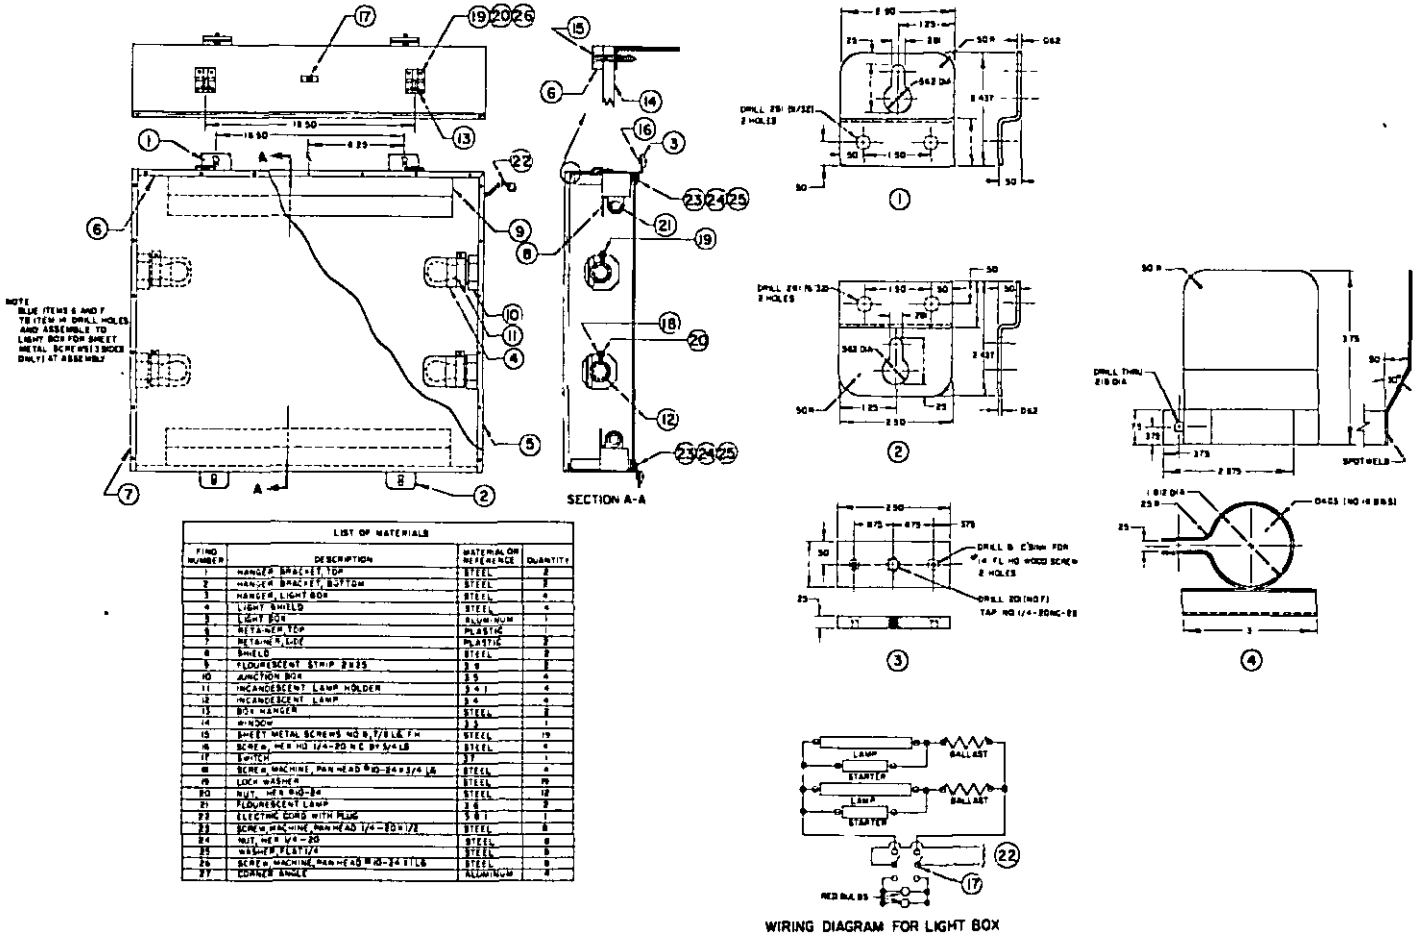

LIST OF MATERIALS

FIND NUMBER	DESCRIPTION	MATERIAL OR REFERENCE	QUANTITY
1	HANGER BRACKET, TOP	STEEL	2
2	HANGER BRACKET, BOTTOM	STEEL	2
3	HANGER, LIGHT BOX	STEEL	4
4	LIGHT SHIELD	STEEL	4
5	LIGHT BOX	ALUMINUM	1
6	RETAINER, TOP	PLASTIC	
7	RETAINER, SIDE	PLASTIC	2
8	SHIELD	STEEL	2
9	FLOURESCENT STRIP 2835	5-9	2
10	JUNCTION BOX	5-5	4
11	INCANDESCENT LAMP HOLDER	5-61	4
12	INCANDESCENT LAMP	5-4	4
13	BOX HANGER	STEEL	2
14	WINDOW	5-3	1
15	SHEET METAL SCREWS NO 8, 7/8 LG, F.H.	STEEL	19
16	SCREW, HEX HD 1/4-20 NC BRASS LG	STEEL	4
17	SWITCH	5-7	1
18	SCREW, MACHINE, PAN HEAD NO-24 x 3/4 LG	STEEL	4
19	LOCK WASHER	STEEL	19
20	NUT, HEX NO-24	STEEL	12
21	FLOURESCENT LAMP	5-8	2
22	ELECTRIC CORD WITH PLUG	5-81	1
23	SCREW, MACHINE, PAN HEAD 1/4-20 x 1/2	STEEL	8
24	NUT, HEX 1/4-20	STEEL	8
25	WASHER, FLAT 1/4	STEEL	8
26	SCREW, MACHINE, PAN HEAD NO-24 x 7/16	STEEL	8
27	CORNER ANGLE	ALUMINUM	4

FIGURE I. LIGHT BOX GENERAL ASSEMBLY AND DETAILS

X-2735

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

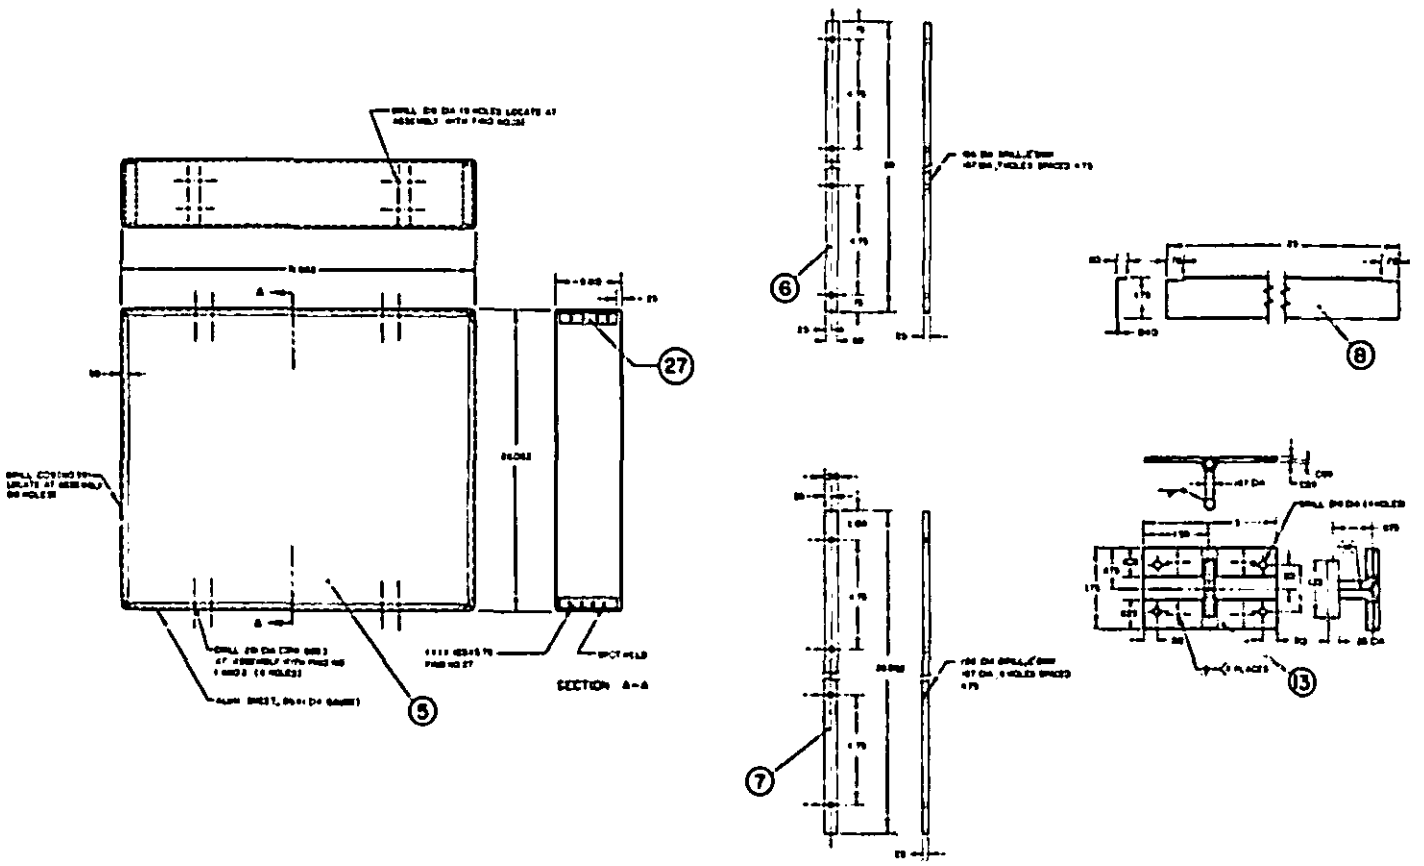


FIGURE 2. VIEWING STAND, DETAILS

X-2736

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-V-52830(ME) Viewing Stand, Illuminated, Negative Film

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research
and Development Center
ATTN: STSFB-DS
Ft. Belvoir, Va. 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:35Z
Check the source to verify that this is the current version before use.