The documentation and process conversion measures necessary to comply with this document shall be completed by 21 July 2025.

INCH-POUND
MIL-PRF-19500/231T
w/AMENDMENT 2
20 March 2025
SUPERSEDING
MIL-PRF-19500/231T
w/AMENDMENT 1
8 August 2023

SEMICONDUCTOR DEVICE, DIODE, SWITCHING, SILICON, TYPES 1N4150 AND 1N3600, QUALITY LEVELS JAN, JANTX, JANTXV, JANHC AND JANKC

JANS1N4150-1 is superseded by MIL-PRF-19500/609 JANS1N6640 (see 6.4). The DO-7 version of the 1N3600 is inactive for new design.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for controlled forward voltage switching diodes. Three levels of product assurance (JAN, JANTX, and JANTXV) are provided for each device type as specified in MIL-PRF-19500. Two levels of product assurance (JANHC and JANKC) are provided for unencapsulated devices.

* 1.2 Package outlines and die topography. The device packages for the encapsulated device types are as follows: DO-35 and DO-7 in accordance with figure 1, surface mount version UR (DO-213AA) in accordance with figure 2, surface mount version UB in accordance with figure 3, surface mount version UD in accordance with figure 4, and the dimensions and topography for JANHCA and JANKCA unencapsulated die in accordance with figure 5, and the dimensions and topography for JANHCB and JANKCB unencapsulated die in accordance with figure 6.

1.3 Maximum ratings. Unless otherwise specified T_A = +25°C.

Type	V_{BR} Min	V_{RWM}	$I_{O(PCB)}$ (1) (2)	I_{FSM} t_p = 8.3ms	T_{STG} & T_J (1)	$R_{\theta JL}$ (axial) (3)	$R_{\theta JEC}$ (UR) (3)	$R_{\theta JA(PCB)}$ (2) (3) (4)	$R_{\theta JSP}$ (UB, UD) (3) (4)
	V dc	V (pk)	mA	A (pk)	°C	°C/W	°C/W	°C/W	°C/W
1N4150-1	75	50	200	2	-65 to +175	250		325	
1N4150UR-1							100	325	
1N4150UB 1N4150UBCA 1N4150UBCC 1N4150UBD					-55 to +200			325	120
* 1N4150UD	75	50	200	2	-55 to +200			325	80
1N3600	75	50	200	2	-55 to +175	250		325	

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

1.3 Maximum ratings - Continued.

(1) For temperature-current derating curves, see figure 7 and figure 8.
(2) T_A = +75°C for both axial and metal electrode leadless face diodes (MELF) (UR) on printed circuit board (PCB), PCB = FR4 - .0625 inch (1.59 mm) 1-layer 1-Oz Cu, horizontal, in still air; pads for (UR) = .061 inch (1.55 mm) x .105 inch (2.67 mm); pads for axial = .092 inch (2.34 mm) diameter, strip = .030 inch (0.76 mm) x 1 inch (25.4 mm) long, lead length L ≤ .187 inch (≤ 4.75 mm); $R_{\theta JA}$ with a defined PCB thermal resistance condition included, is measured at I_O = 200 mA dc.
(3) For axial leaded devices L = .375 inch (9.53 mm). See figure 9, figure 10, figure 11, and figure 12 for thermal impedance curves.
* (4) $R_{\theta JSP}$ refers to thermal resistance from junction to the solder pads of the UB and UD package.

1.4 Primary electrical characteristics. T_A = +25°C, unless otherwise specified.

Limits (1)	V_{F1} I_F = 1 mA dc (pulsed)	V_{F2} I_F = 10 mA dc (pulsed)	V_{F3} I_F = 50 mA dc (pulsed)	V_{F4} I_F = 100 mA dc (pulsed)	V_{F5} I_F = 200 mA dc (pulsed)	I_{R1} at V_R = 50 V dc (pulsed)
	V dc	V dc	V dc	V dc	V dc	µA dc
Minimum	0.540	0.660	0.760	0.820	0.870	
Maximum	0.620	0.740	0.860	0.920	1.000	0.1

Limits (1)	I_{R2} V_R = 50 V dc T_A =+150°C	C V_R = 0; f = 1 MHz; ac signals = 50 mV(p-p)	t_{rr1} I_F = I_R = 10 to 100 mA dc R_L = 100 ohms
	µA dc	pf	ns
Minimum			
Maximum	100	2.5	4

(1) Primary electrical characteristics for surface mount devices are equivalent to the corresponding non-surface mount devices unless otherwise specified.

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.6 for PIN construction example, 6.7 for a list of available PINs, and 6.4 for supersession information.

1.5.1 JAN certification mark and quality level.

1.5.1.1 Quality level designators for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: The quality level "JAN" "JANTX" and "JANTXV".

1.5.1.2 Quality level designators for unencapsulated devices (die). The quality level designators for unencapsulated devices (die) that are applicable for this specification sheet from the lowest to the highest level are as follows: "JANHC" and "JANKC".

1.5.2 Device type. The designation system for the device types covered by this specification sheet are as follows.

1.5.3.1 First number and first letter symbols. The diodes of this specification sheet use the first number and letter symbols "1N".

1.5.3.2 Second number symbols. The second number symbols for the diodes covered by this specification sheet are as follows: "4150" and "3600".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

* 1.5.4 Suffix symbols. The following suffix letters are incorporated in the PIN as applicable:

-1	Indicates an axial through-hole mount (DO-35) package (see figure 1).
	A blank first suffix symbol indicates an axial through-hole mount (DO-7) package (see figure 1).
UR-1	Indicates a surface mount, round endcap package (see figure 2).
UB	Indicates a surface mount, small leadless chip carrier package (see figure 3).
UBCA	Indicates a 4 pad surface mount package. The metal lid is connected to pad 4, (two diodes with common anode, see figure 3)).
UBD	Indicates a 4 pad surface mount package. The metal lid is connected to pad 4, (two diodes with one anode and one cathode common, see figure 3)).
UBCC	Indicates a 4 pad surface mount package. The metal lid is connected to pad 4, (two diodes with common cathode, see figure 3)).
UD	Indicates a surface mount LCC 3 leads. Pad 3 = shielding, connected to the lid (See figure 4)

1.5.5 Lead finish. The lead finishes applicable to this specification sheet are listed on QML-19500.

1.5.6 Die identifiers for unencapsulated devices (manufacturers and critical interface identifiers). The manufacturer die identifiers that are applicable for this specification sheet is "A" and “B”.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.


DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

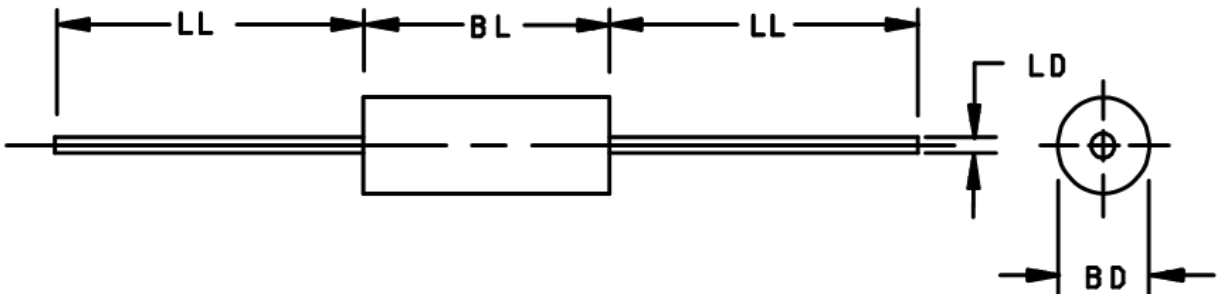


Types	Symbol	Dimensions			
		in	in	mm	mm
		Min	Max	Min	Max
1N4150-1, 1N3600 (DO-35)	BD	.056	.075	1.42	1.91
1N4150-1, 1N3600 (DO-35)	BL	.140	.180	3.56	4.57
1N4150-1, 1N3600 (DO-35)	LD	.018	.022	0.46	0.56
1N4150-1, 1N3600 (DO-35)	LL	1.000	1.500	25.40	38.10
1N3600 (DO-7)	BD	.056	.107	1.42	2.72
1N3600 (DO-7)	BL	.140	.300	3.56	7.62
1N3600 (DO-7)	LD	.018	.022	0.46	0.56
1N3600 (DO-7)	LL	1.000	1.500	25.40	38.10

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.

TYPES 1N4150-1, 1N3600

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

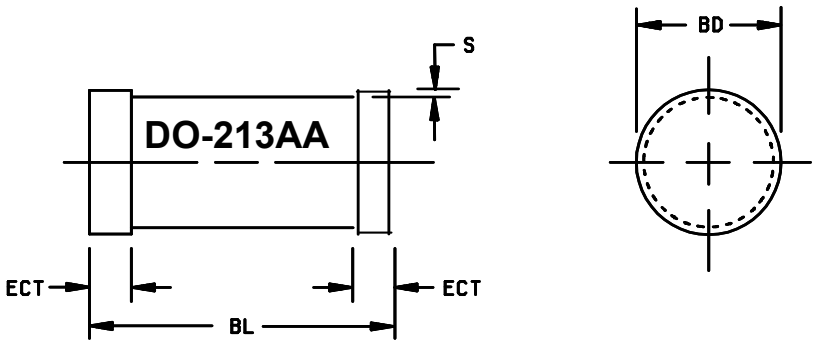



Symbol	Dimensions				
	in	in	mm	mm	Note
	Min	Max	Min	Max	
BD	.063	.067	1.60	1.70	
BL	.130	.146	3.30	3.71	
ECT	.016	.022	0.41	0.56	
S					3

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Dimension S is optional however the glass body diameter shall not exceed endcap diameter.

FIGURE 2. Physical dimensions, 1N4150UR-1 (DO-213AA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

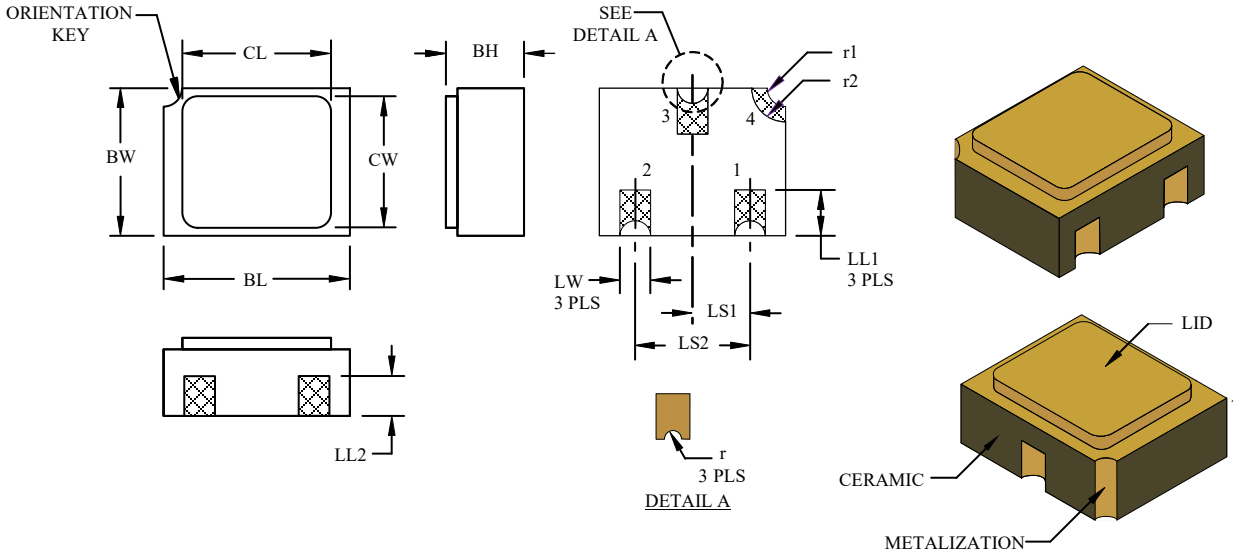

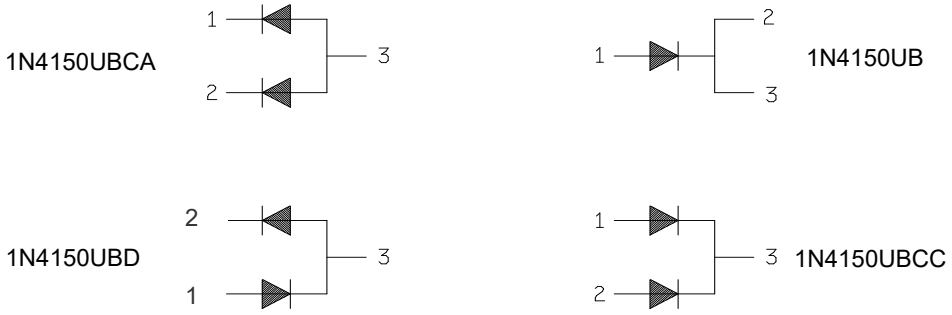


Symbol	Dimensions				Symbol	Dimensions			
	in	in	mm	mm		in	in	mm	mm
	Min	Max	Min	Max		Min	Max	Min	Max
BH	.040	.056	1.02	1.42	LS1	.035	.040	0.89	1.02
BL	.115	.128	2.92	3.25	LS2	.071	.079	1.80	2.01
BW	.085	.108	2.16	2.74	LW	.016	.024	0.41	0.61
CL		.128		3.25	r		.008		0.20
CW		.108		2.74	r1		.012		0.31
LL1	.022	.038	0.56	0.97	r2		.022		0.56
LL2	.017	.035	0.43	0.89					

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Ceramic package only.
3. Hatched areas on package denote metallized areas. Pad 4 = shielding, connected to the lid.

FIGURE 3. Physical dimensions, surface mount (UB version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

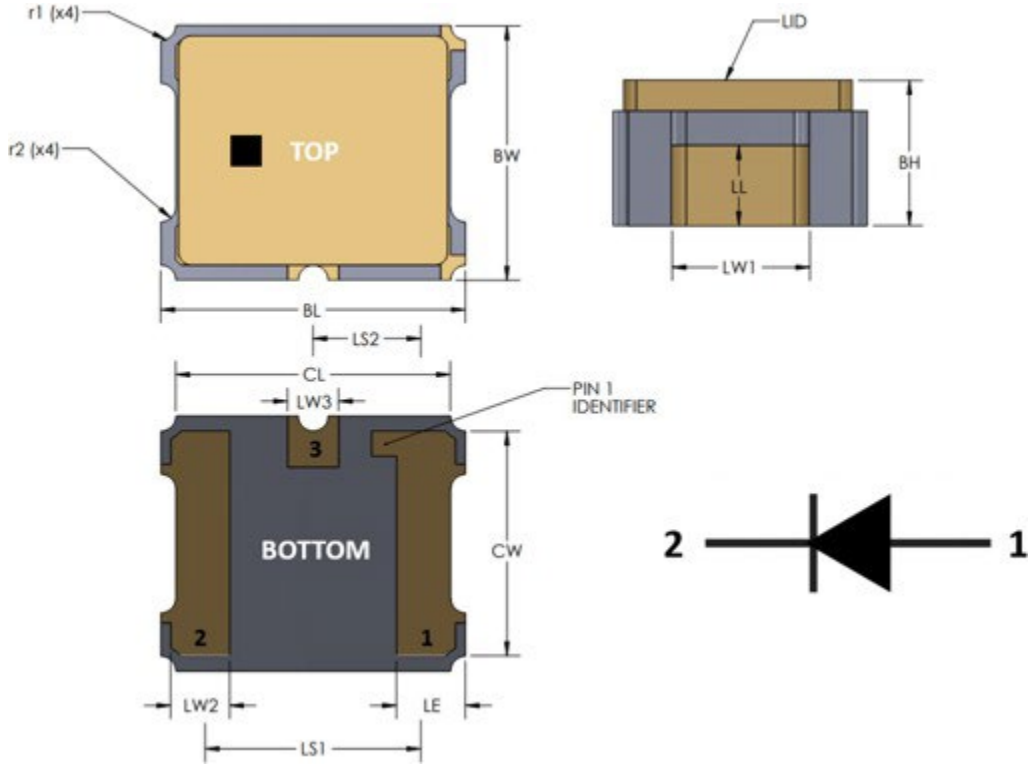


Symbol	Dimensions				Symbol	Dimensions			
	in	in	mm	mm		in	in	mm	mm
	Min	Max	Min	Max		Min	Max	Min	Max
BH	0.048	0.062	1.186	1.590	LW1	0.051	0.057	1.330	1.430
BL	0.112	0.128	2.850	3.250	LW2	0.019	0.027	0.490	0.690
BW	0.092	0.108	2.340	2.740	LW3	0.019	0.021	0.490	0.530
CL	0.103	0.113	2.620	2.880	LE	0.021	0.033	0.540	0.840
CW	0.083	0.093	2.120	2.360	r1		0.006		0.150
LL	0.028	0.034	0.720	0.880	r2		0.006		0.150
LS1	0.085	0.093	2.160	2.360					
LS2	0.043	0.047	1.080	1.180					

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Pad 3 = shielding, connected to the lid.
3. Cathode marked with a square.

* FIGURE 4. Physical dimensions, surface mount (UD version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

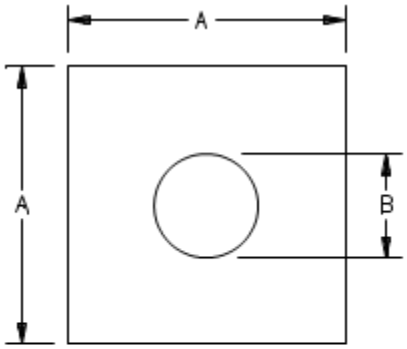

BACKSIDE IS CATHODE




Ltr	Dimensions			
	in	in	mm	mm
	Min	Max	Min	Max
A	.014	.018	.360	.460
B	.005	.007	.127	.180
C	.008	.012	0.20	0.30

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. The physical characteristics of the die are:
   Metallization:
   Top (anode): Al
   Back (cathode): Au
   Al thickness: 25,000 Å minimum.
   Gold thickness: 4,000 Å minimum.
   Chip thickness: .010 inches (0.25 mm) ±.002 inches (0.05 mm).

* FIGURE 5. Physical dimensions, JANHCA and JANKCA die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

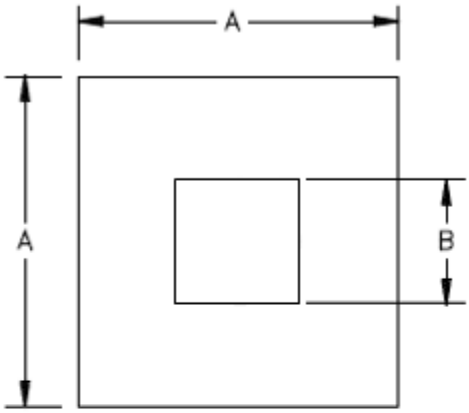

BACKSIDE IS CATHODE



Ltr	Dimensions			
	in	in	mm	mm
	Min	Max	Min	Max
A	.015	.019	.381	.483
B	.004	.006	.102	.152
C	.006	.010	.152	.254

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. The physical characteristics of the die are:
3. Metallization:
   Top (anode): Al-Si, 14,400 Å Minimum
   Back (cathode): Au, 5,800 Å Minimum
   Chip thickness: 008 Inch [± .002 Inch] (.203 mm [± .0508mm])
4. Backside: Cathode

* FIGURE 6. Physical dimensions, JANHCB and JANKCB die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list (QML-19500) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows.

SP Solder pad on UB devices.
V_{fr} Forward recovery voltage. Specified maximum forward voltage used to determine forward recovery time.

* 3.4 Interface requirements and physical dimensions. Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500, and on figure 1 (axial leads), figure 2 (DO-213AA), figure 3 (UB), figure 4 (UD), figure 5 (JANHCA and JANKCA), and figure 6 (JANHCB and JANKCB).

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

* 3.4.2 Diode construction. All devices (except UB and UD version) shall be metallurgically bonded, double plug construction in accordance with the requirements of MIL-PRF-19500. All glass diodes shall be designed with sufficient thermal compensation in the axial direction to optimize tensile and compressive stresses. Dimensional analysis is required of all materials used to achieve axial thermal compensation. Dimensional tolerances and corresponding coefficient of thermal expansion (CTE) shall be documented on the DLA Design and Construction Form 36D and shall be approved by the qualifying activity to maintain qualification. Dimensional tolerances shall be sufficiently tight enough to prevent excessive stresses due to the inherent CTE mismatch. The UB devices shall be eutectically mounted and wire bonded in a ceramic package. The ‘UR’ version shall be structurally identical to the axial leaded versions except for end-cap lead attachment.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I herein.

3.8 Workmanship. Switching diode devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 JANHC and JANKC qualification. JANHC and JANKC qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.2 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not require the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.3 Screening (JANTX and JANTXV levels). Screening shall be in accordance with table E-IV of MIL-PRF-19500 and as specified herein. Specified electrical measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screening	JANTXV and JANTX level
(1) 3c	Thermal impedance (see 4.3.3)
9	Not required
10	Method 1038 of MIL-STD-750, condition A
(2) 11	I_{R1} and V_{F2}
12	See 4.3.2
(3) (4) 13	Subgroup 2 of table I herein; ΔI_{R1} = 100 percent of initial value or 25 nA dc, whichever is greater; ΔV_{F2} = 25 mV dc.

(1) Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.
(2) Test within 24 hours after removal from test.
(3) When thermal impedance is performed prior to screen 13, it is not required to be repeated in screen 13.
(4) PDA $\leq$ 5 percent.

4.3.1 Screening (JANHC and JANKC). Screening of JANHC and JANKC die shall be in accordance with MIL-PRF-19500 "Discrete Semiconductor Die/Chip Lot Acceptance". Burn-in duration for the JANKC level follows JANS requirements; the JANHC follows JANTX requirements.

4.3.2 Power burn-in conditions. Power burn-in conditions are as follows (see 4.5.2): Method 1038 of MIL-STD-750, condition B. V_R = rated V_{RWM}; f = 50 - 60 Hz; $I_{O(min)} = I_{O(PCB)}$ or $I_F = I_{O(PCB)}$. The maximum current density of small die shall be submitted to the qualifying activity for approval. With approval of the qualifying activity and preparing activity, alternate burn-in criteria (hours, bias conditions, mounting conditions, etc.) may be used for JANTX and JANTXV quality levels. A justification demonstrating equivalence is required. In addition, the manufacturing site's burn-in data and performance history will be essential criteria for burn-in modification approval.

4.3.3 Thermal impedance measurements. The thermal impedance measurements shall be performed in accordance with method 3101 or 4081 of MIL-STD-750, as applicable, using the guidelines in that method for determining I_H and I_M and t_{MD}. t_H shall be 10 ms maximum. See group E, subgroup 4 of table II herein.

4.3.4 JAN testing. JAN level product will have temperature cycling and thermal impedance testing performed in accordance with MIL-PRF-19500, JANTX level screening level requirements. Electrical testing shall be in accordance with table I, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500, table I herein, and as specified herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and 4.4.2.1 herein.

4.4.2.1 Group B inspection, table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500. Leaded samples from the same lot may be used in lieu of 'UR' suffix sample for life test.

	Subgroup	Method	Conditions
	B2	1056	0°C to +100°C, 10 cycles.
	B2	1051	-55°C to +175°C, 45 cycles, including screening.
*	B2	2005	I_F = 100 mA, axial tensile stress = 8 lbs (3.63 Kg), T_A = +150°C; (not applicable to 'UR', 'UB', or 'UD' package).
	B3	1027	$V_{(pk)}$ = rated V_{RWM}; f = 50 - 60 Hz; I_O = 200 mA dc minimum; adjust T_A or I_O to obtain a minimum T_J of +150°C. See 4.5.2.
*	B4	2075	UB and UD devices
*	B4	2101	Glass devices, Decap analysis; scribe and break (not applicable for UB or UD devices).
	B6	1032	T_A = +175°C.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500, and as follows.

4.4.3.1 Group C inspection, table E-VII of MIL-PRF-19500.

	Subgroup	Method	Conditions
	C2	1056	0°C to + 100°C, 10 cycles.
	C2	1051	-55°C to + 175°C, 45 cycles including screening.
*	C2	2036	Tension - test condition A; weight = 10 pounds (4.54 Kg), t = 15 s; lead fatigue = condition E (not applicable to 'UR', 'UB', or 'UD' suffix types).
*	C5	4081	L = .375 inch (9.53 mm), $R_{\theta JL}$ = 250°C/W maximum; $R_{\theta JEC}$ = 100°C/W; $R_{\theta JSP}$ = 120°C/W (UB packages), $R_{\theta JSP}$ = 80°C/W (UD) ; (see 4.3.2), 22 devices, c = 0.
	C6	1026	1,000 hours minimum, V(pk) = rated V_{RWM}; f = 50 - 60 Hz; I_O = 200 mA dc minimum; adjust T_A or I_O to obtain a minimum T_J of +150°C. See 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-IX of MIL-PRF-19500, and table II herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurements shall be as specified in section 4 of MIL-STD-750.

4.5.2 Free air power burn-in and life tests. The use of a current limiting or ballast resistor is permitted provided that each device under test still sees the full P_t (minimum) and that the minimum applied voltage, where applicable, is maintained throughout the burn-in period. Method 3100 of MIL-STD-750 shall be used to measure T_J.

4.5.3 Forward recovery voltage and time. Forward recovery shall be measured as the time interval between zero time and the point where the pulse has decreased to 110 percent of the steady-state value of V_F when I_F = 200 mA dc. The maximum rise time of the response detector shall be 1 ns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Thermal impedance 4/	3101	See 4.3.3	$Z_{\theta JX}$			°C/W
Forward voltage	4011	I_F = 1 mA dc (pulsed, see 4.5.1) Condition B	V_{F1}	0.540	0.620	V dc
	4011	I_F = 10 mA dc (pulsed, see 4.5.1) Condition B	V_{F2}	0.660	0.740	V dc
	4011	I_F = 50 mA dc (pulsed, see 4.5.1) Condition B	V_{F3}	0.760	0.860	V dc
	4011	I_F = 100 mA dc (pulsed, see 4.5.1) Condition B	V_{F4}	0.820	0.920	V dc
	4011	I_F = 200 mA dc (pulsed, see 4.5.1) Condition B	V_{F5}	0.870	1.000	V dc
Breakdown voltage	4021	I_{BR} = 10 µA dc	V_{BR1}	75		V dc
Reverse current	4016	Condition A or B, DC method; V_R = 50 V dc	I_{R1}		0.10	µA dc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current	4016	Condition A or B,DC method, V_R = 50 V dc	I_{R2}		100	µA dc
Low temperature operation:		T_A = -55°C				
Breakdown voltage	4021	I_R = 5 µA dc	V_{BR2}	75		V dc
Subgroup 4						
Capacitance	4001	V_R = 0 V dc, f = 1 MHz, V_{sig} = 50 mV (pk to pk), maximum	C		2.5	pF
Reverse recovery time	4031	Condition A, $I_F = I_{RM}$ = 10 mA dc	t_{rr1}		4	ns
* Scope display evaluation	4023	See method 4023 of MIL-STD-750, figures 4023-4, 4023-8, 4023-10, 4023-11 only				

See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/ 2/ 3/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Conditions		Min	Max	
Subgroup 5						
Not applicable						
Subgroup 6						
Surge current	4066	Condition A (sine wave), $I_{F(surge)}$ = 2 A(pk), I_O = 0, V_{RM} = 0, 10 surges, 8.3 ms width each, one surge per minute, T_A = +25°C or Condition B (square wave), $I_{F(surge)}$ = 4 A (pk), 10 surges, 1μs width each, duty factor = 0.0055 percent, T_A = 25°C				
Subgroup 7						
Forward recovery voltage and time	4026	I_F = 200 mA dc; t_r = 1 ns; (see 4.5.3)	V_{FRM} t_{fr}		5 10	V(pk) ns

1/ For sampling plan, see MIL-PRF-19500.
2/ UBCA, UBCC, and UBD devices are to have each diode tested individually.
3/ Electrical characteristics for all surface mount versions are identical to the corresponding axial leaded versions unless otherwise specified.
* 4/ This test required for the following end-point measurements only:
Group B, subgroups 2 and 3 (JAN, JANTX, JANTXV).
Group C, subgroups 2 and 6.
Group E, subgroup 1.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification and requalification only.

	Inspection	MIL-STD-750		Qualification inspection
		Method	Conditions	
	Subgroup 1			n = 45, c = 0
	Thermal shock (glass strain)	1056	100 cycles 0°C to 100°C.	
	Temperature cycling	1051	500 cycles, -65°C to +175°C.	
*	Hermetic seal	1071	Gross leak only. Fine and gross leak required for UB and UD.	
	Electrical measurement		See table I, subgroup 2.	
	Subgroup 2			n = 45, c = 0
	Intermittent operating life	1037	10,000 cycles.	
	Electrical measurements		See table I, subgroup 2.	
	Subgroup 4			
	Thermal impedance curves		See MIL-PRF-19500.	Sample size N/A
	Subgroup 5			
	Not applicable			
	Subgroup 6			
	ESD	1020		
	Subgroup 8			n = 45
*	Resistance to glass cracking	1057	Test condition B. Test until failure occurs or to a maximum of 25 cycles, whichever comes first. Not required for UB or UD suffix devices.	
	Subgroup 9			n = 22, c = 0
*	Monitored mission temperature cycling	1055	Not required for UB or UD suffix devices.	
	Electrical measurements		See table I, subgroup 2.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

Temperature-Current Derating Curve
1N4150-1, 1N4150UR-1, 1N3600

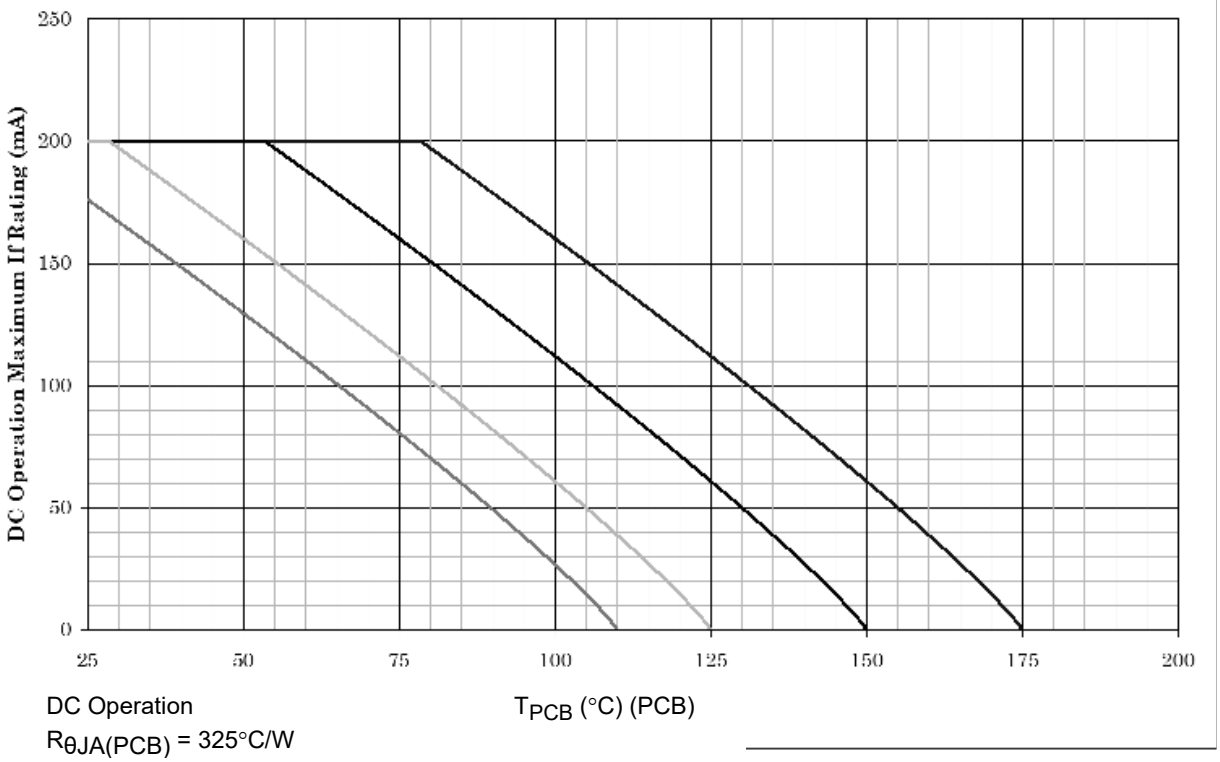


NOTES:

1. All devices are capable of operating at ≤ T_J specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperature (T_J ≤ +175°C) and current rating specified. (See 1.3.)
3. Derate design curve chosen at T_J ≤ 150°C, where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at T_J ≤ 125°C, and 110°C to show current rating where most users want to limit T_J in their application.

* FIGURE 7. Temperature-current derating graph (all devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

Temperature-Current Derating Curve
1N4150UB

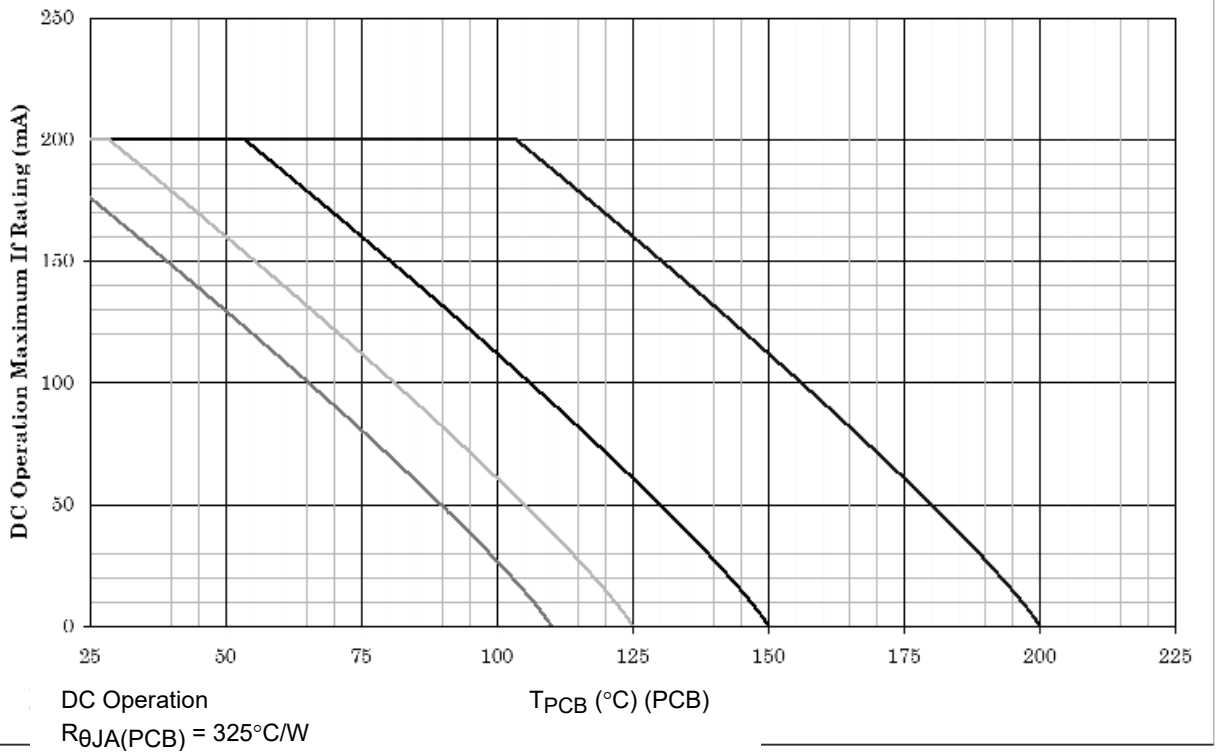


NOTES:

1. All devices are capable of operating at ≤ T_J specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum T_J allowed.
2. Derate design curve constrained by the maximum junction temperature (T_J ≤ 200°C) and current rating specified. (See 1.3.)
3. Derate design curve chosen at T_J ≤ 150°C, where the maximum temperature of electrical test is performed.
4. Derate design curves chosen at T_J ≤ 125°C, and 110°C to show current rating where most users want to limit T_J in their application.

* FIGURE 8. Temperature-current derating graph (all devices).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

1N4150-1, 1N3600 DO-35 Axial T_L = 25°C
MAXIMUM THERMAL IMPEDANCE PLOTS

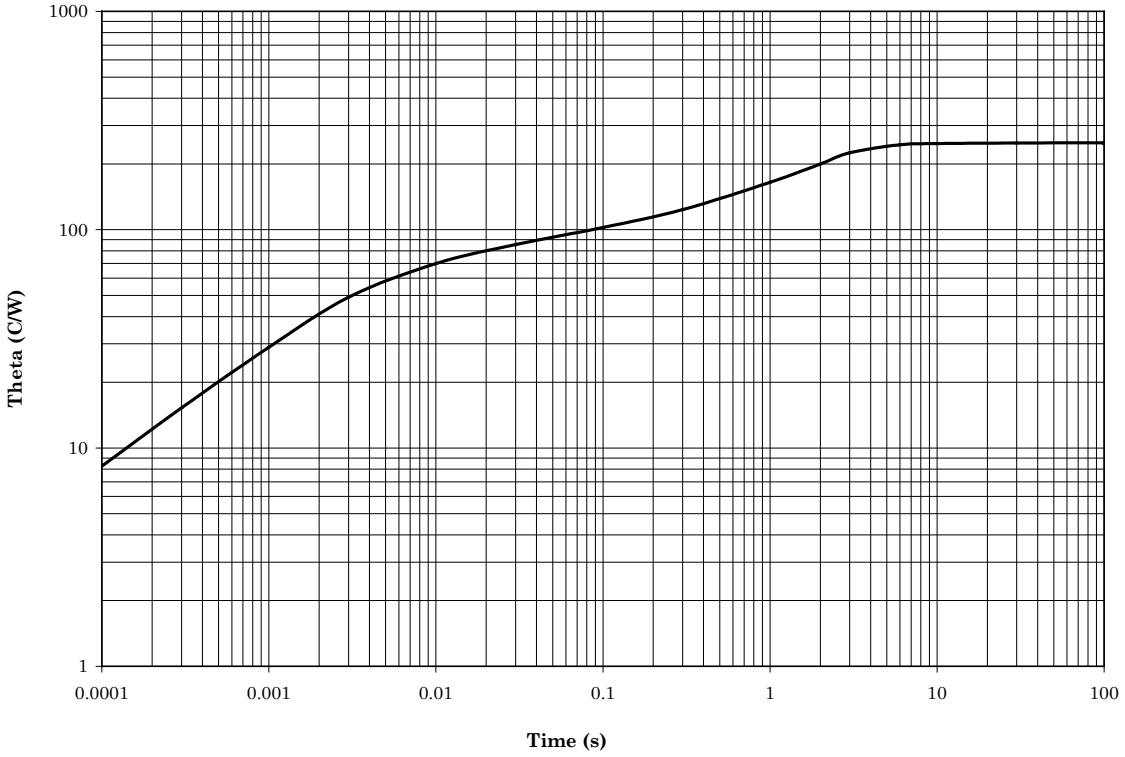


$R_{\theta JL}$ = 250°C/W

NOTE: $Z_{\theta JX}$ = 70°C/W maximum at t_H = 10ms.

* FIGURE 9. Thermal impedance (axial leads).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

1N4150UR-1 DO-213AA T_{EC} = 25°C
Maximum Thermal Impedance Plots

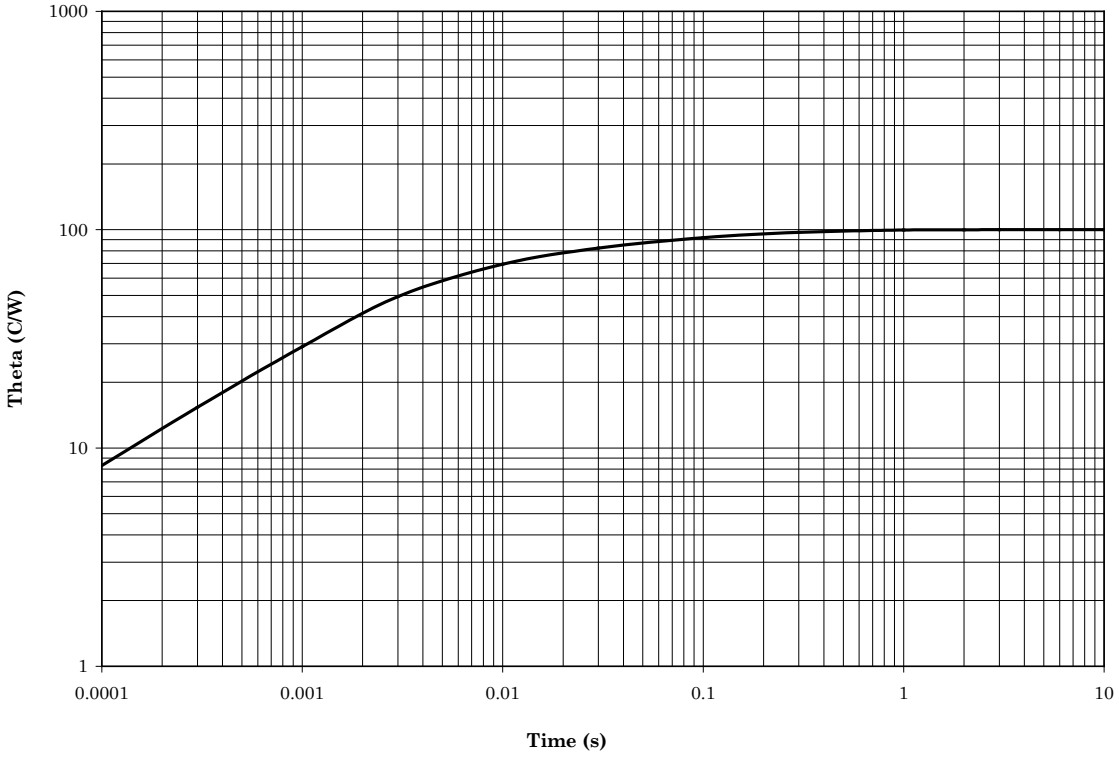


$R_{\theta JEC}$ = 100°C/W

NOTE: $Z_{\theta JX}$ = 70°C/W maximum at t_H = 10ms.

* FIGURE 10. Thermal impedance (MELF surface mount).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

1N4150UB, T_{SP} = 25°C
Maximum Thermal Impedance Plots

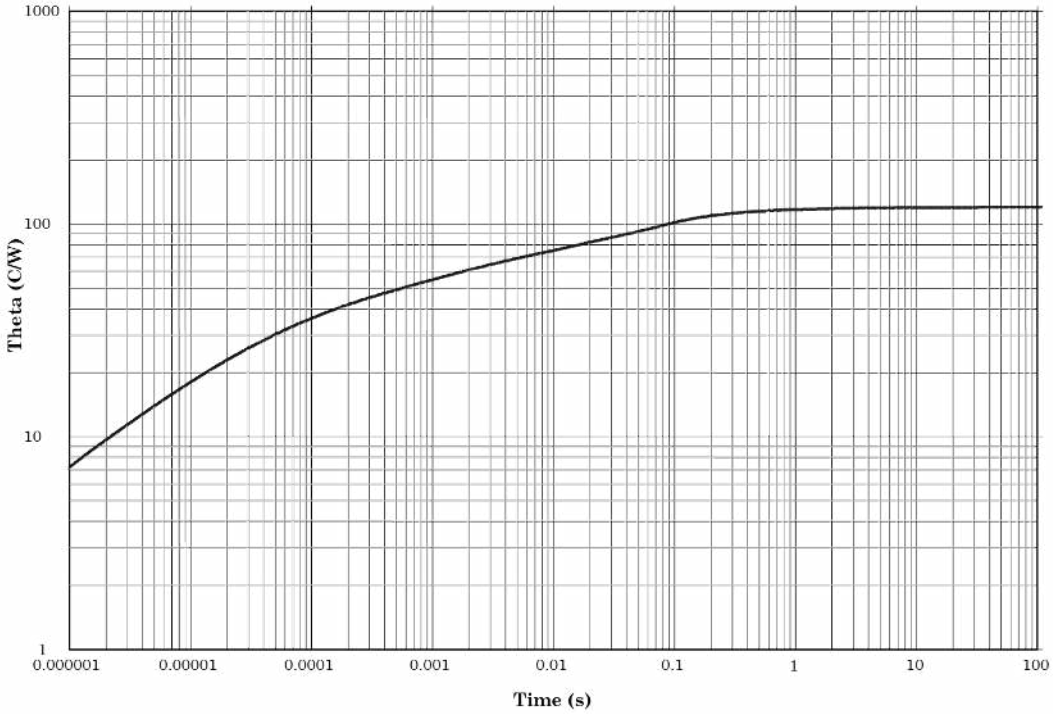


$R_{\theta JSP}$ = 120°C/W

NOTE: $Z_{\theta JX}$ = 75°C/W maximum at t_H = 10ms.

* FIGURE 11. Thermal impedance (UB versions).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

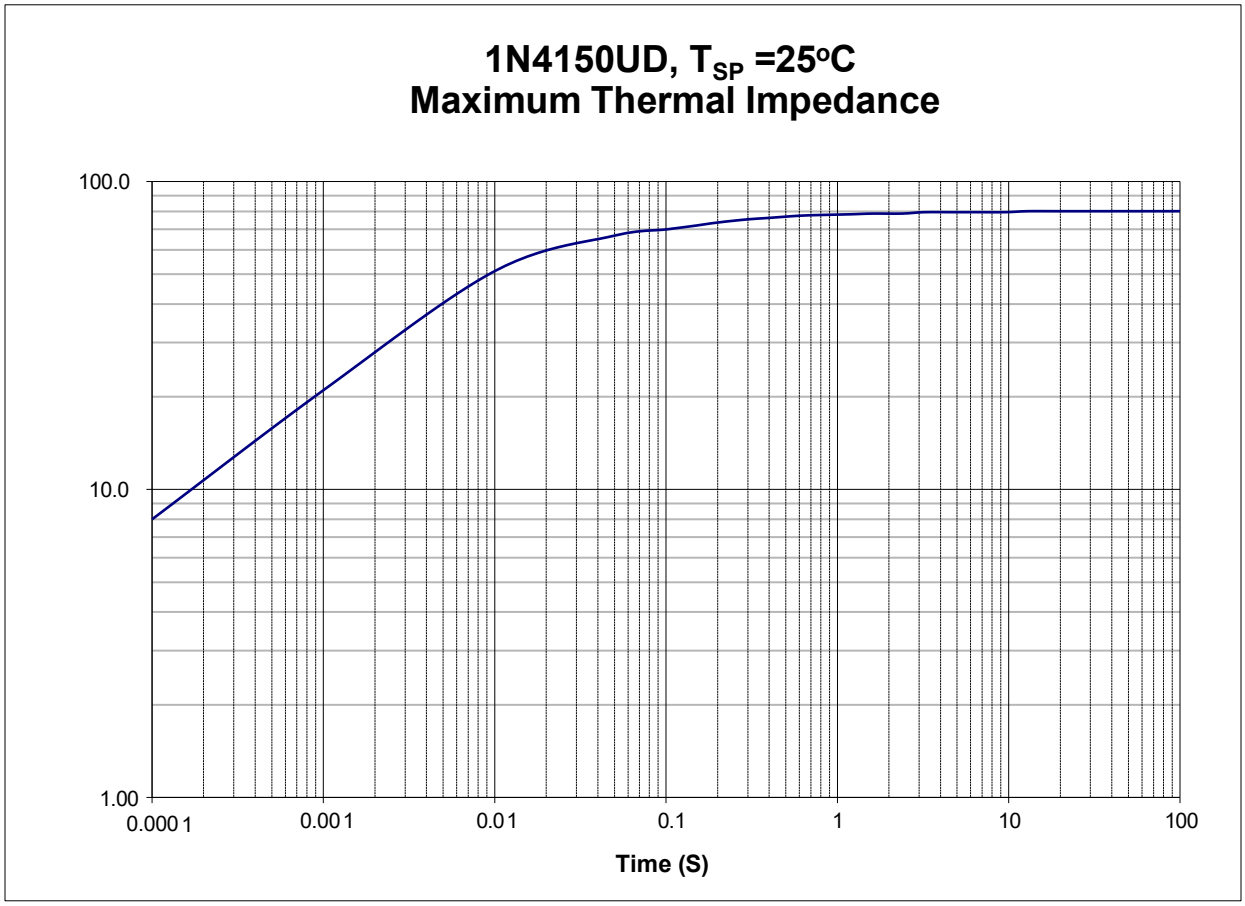

$R_{\theta JSP}$ = 80°C/W

NOTE: $Z_{\theta JX}$ = 51°C/W maximum at t_H = 10ms.

* FIGURE 12. Thermal impedance (UD version).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. The complete (PIN), see 1.5 and 6.6.

e. Destructive physical analysis when requested.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil.

6.4 Cross reference substitution list. JANS1N4150-1 is prohibited and will no longer be built or qualified. Devices in stock are acceptable provided the date code does not exceed 9412. A PIN for PIN replacement table follows, and these devices are directly interchangeable. The 1N4150 design is unsuitable for space flight applications. The JANS1N6640 will be used in place of the JANS1N4150-1.

Non-preferred PIN	Preferred PIN
JANS1N4150-1 JANS1N4150UR-1	JANS1N6640 JANS1N6640US

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

6.4.1 Substitutability of dash-one parts. Dash-one devices are a direct substitute for non-dash-one devices and are preferred. The following table shows the direct substitutability.


Superseded PIN	Superseding PIN
1N3600	1N4150-1
1N4150	1N4150-1

6.5 Suppliers of JANHC and JANKC die. The qualified JANHC and JANKC suppliers with the applicable letter version (example JANHCA1N4150) will be identified on the QML.


JANHC and JANKC ordering information		
PIN	Manufacturer	
	52GC4	52GC4
1N4150	JANHCA1N4150 JANKCA1N4150	JANHCB1N4150 JANKCB1N4150
1N3600	JANHCA1N3600 JANKCA1N3600	JANHCB1N3600 JANKCB1N3600

6.6 PIN construction example.

6.6.1 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

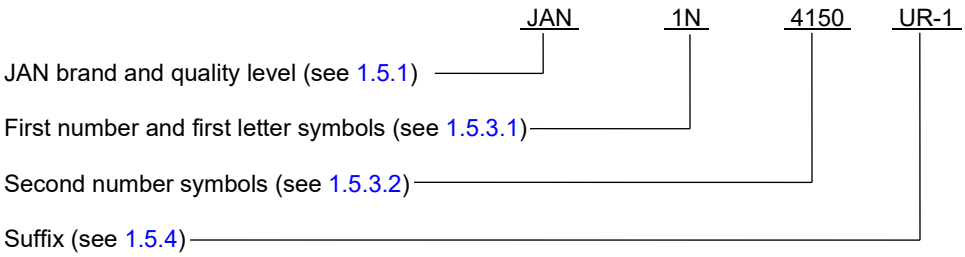

6.6.2 Unencapsulated devices. The PINs for un-encapsulated devices are constructed using the following form.

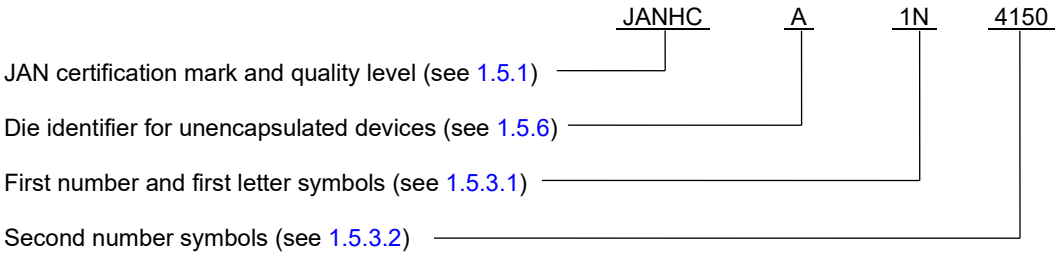

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.

6.7 List of PINs. The following is a list of possible PINs available on this specification sheet.

PINs for devices of the base quality level	PINs for devices of the "TX" quality level	PINs for devices of the "TXV" quality level	PINs for devices of the "HC" and "KC" quality levels
JAN1N4150-1	JANTX1N4150-1	JANTXV1N4150-1	JANHCA1N4150
JAN1N4150UR-1	JANTX1N4150UR-1	JANTXV1N4150UR-1	JANKCA1N4150
JAN1N4150UB	JANTX1N4150UB	JANTXV1N4150UB	JANHCA1N3600
JAN1N4150UBCA	JANTX1N4150UBCA	JANTXV1N4150UBCA	JANKCA1N3600
JAN1N4150UBCC	JANTX1N4150UBCC	JANTXV1N4150UBCC	JANHCB1N4150
JAN1N4150UBD	JANTX1N4150UBD	JANTXV1N4150UBD	JANKCB1N4150
JAN1N4150UD	JANTX1N4150UD	JANTXV1N4150UD	
JAN1N3600	JANTX1N3600	JANTXV1N3600	JANHCB1N3600 JANKCB1N3600

6.8 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 85
NASA - NA
DLA - CC

Review activities:
Army - AR, AV, MI, SM
Navy - AS, MC
Air Force - 19, 71

Preparing activity:
DLA - CC

(Project 5961-2025-043)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:47Z
Check the source to verify that this is the current version before use.